


Disinfection Module Solution

Specification

CMD-FSC-COGA



Product Brief

Description

- This module is designed for disinfection.

Features and Benefits

- UVC LED
- Low thermal resistance
- Simple BOM
- Miniaturization
- Lead Free Product

Key Applications

- Disinfection

Table 1. Product

Model	Input Current [mA]	Φ_e [mW]	Wp [nm]			Remark
			MIN	TYP	MAX	
CMD-FSC-COGA	400	145	270	275	280	Constant Current

Table of Contents

Index	
• Product Brief	
• Table of Contents	
• Performance Characteristics	
• Drawing	
• Packing	
• Label Information	
• Precaution for Use	

Performance Characteristics

Table 2. Electro Optical Characteristics at 400mA (Constant Current)

($T_c=25^{\circ}\text{C}$ RH=30%)

Parameter`	Symbol	Value			Unit
		Min.	Typ.	Max.	
Peak wavelength ^[1]	Wp	270	275	280	nm
Forward Voltage	V _F	20.0	23.0	28.0	Vdc
Power Consumption	P	8.0	9.2	11.5	W
Radiant Flux ^[2]	Φ _e ^[3]	128	145		mW

Notes :

[1] P_d can be changed by surrounding temperature and current.

[2] Peak Wavelength Measurement tolerance : ±3nm

[3] Radiant Flux Measurement tolerance : ± 10%

[4] Φ_e is the Total Radiant Flux as measured with an integrated sphere.

[5] Forward Voltage Measurement tolerance : ±3%

※Operating temperature was tested at the assigned T_c point on the PCB.

※It is recommended to drive under conditions of T_c= 60 °C or less.






Table 3. Absolute Maximum Ratings

Parameter	Symbol	Unit	Value
Operating Temperature	T _{opr}	°C	-20 ~ +40
Storage Temperature	T _{stg}	°C	-20 ~ +60

Drawing

[Unit: mm]

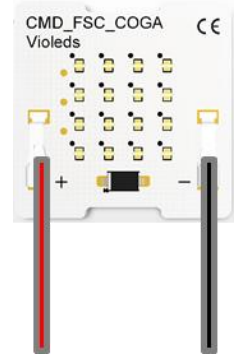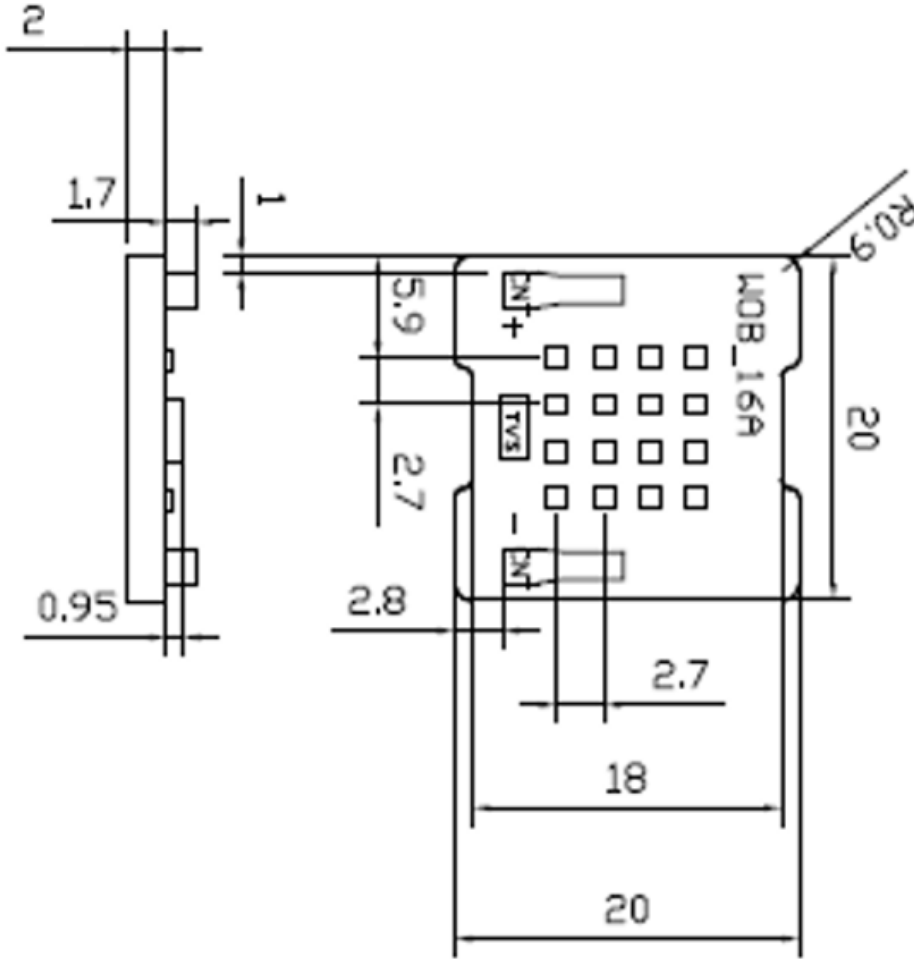


Notes :


- Module Dimensions of the indicated maximum value, and to allow a tolerance : ± 0.5 [mm]
- Tool to open the contact to Insert/withdraw wire.
Contact opening tool [P/N : 06-9296-7001-01-000]
Wire Size : 18AWG to 26AWG [solid/stranded copper conductor.]
Wire Trim Length : 4.5 ± 0.5 mm [AVX Connector]

Packing


- 1) 1 Tray = 112pcs of products
(510Lx320Wx18T) mm

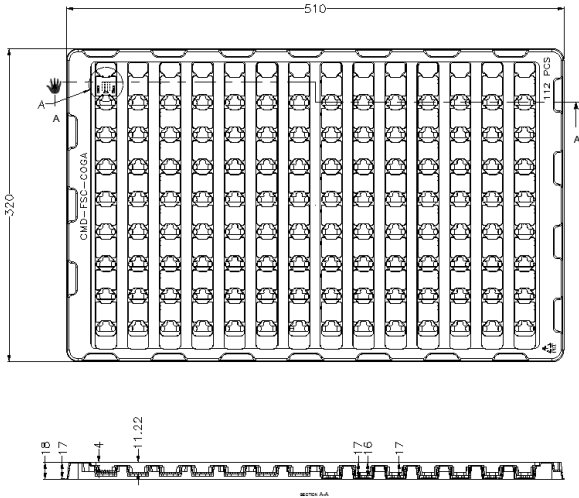

- 2) Stacking 16 Trays (The top tray is an empty Tray)
 → 15 tray X 112EA = 1680EA (1Tray=dummy)
 → 1 tray pack 112pcs
 → Total Quantity : 1680 pcs

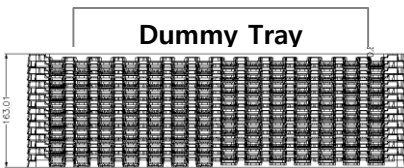


- 3) Tapping 16 Tray to fix.

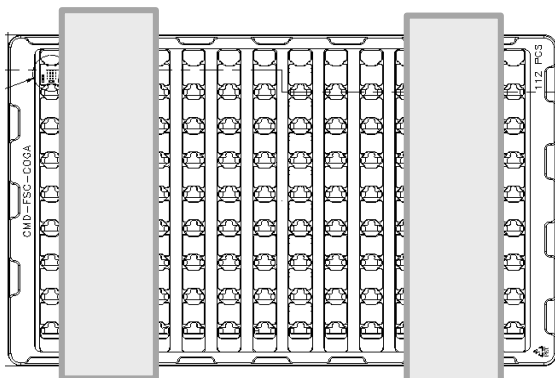

Tray tapping


Tray tapping

Pack the tray in a box

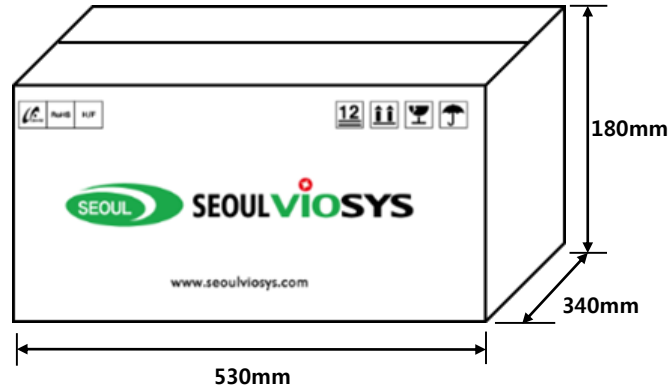

- * 1BOX : 112 pcs per tray x 15 Trays = 1680 pcs
- TOTAL : 1680 pcs per 1BOX
(Outer guards are packaged in bulk)
- * If it is not a full box, apply the buffer material to fix the product


- 4) Labeling

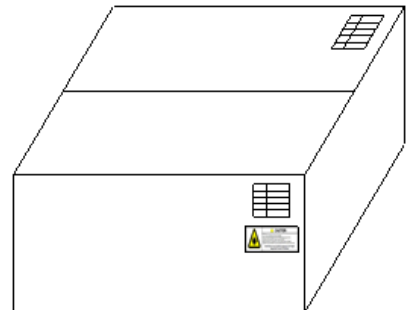

Part	Index	Unit	Information (mm)	Remark
Pallet	Size	mm	1067*1067	
	Box quantity	ea	24	4x6 layer
	Material	Plastic	-	

Label Information

1) Label attachment location

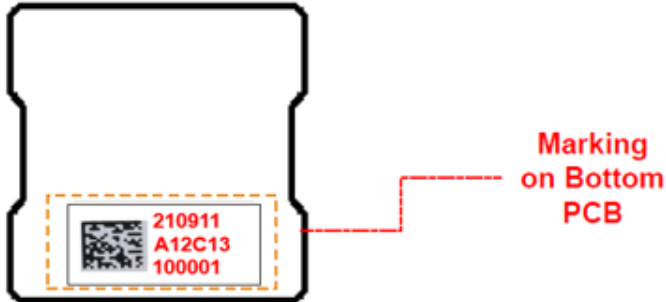


2) Label information



No	Item	Information	Digits	Value	Remark	
①	Date	YYMMDD	6	SMT date	Ex: 210911	
②	Module Bin Code	LED Rank	3	A12	Radiant Flux	Min 128W
			1	C	Wavelength	275nm
			3	13	Vf	DY9560-27-P-Bin
③	Lot No	100001	6	1	Lot no	
				00001	Lot number	00001~99999

Label Information

Model No.	CMD-FSC-COGA⁽¹⁾
Rank	-
Type	
Quantity	XX
Lot No.	YYMDDXXXXX-XXXXXXX⁽²⁾
	SEOUL VIOSYS CO.,LTD.



Reference

- (1) It represent module part number.
- (2) YYMDD : Packing Date
 YY : Last 2digits of year(ex – 2018 → 18)
 MM : Month(2digits)
 DD : Date(2digits)
 -
 XXXXX : Packing box number
 -
 XXXXXXX: SAP code module

Note

* Affixed to the label space of the box

* Labeling

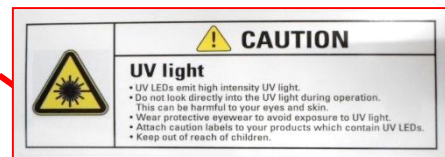

Precaution for Use

1) Storage

- To avoid moisture penetration, we recommend storing UV-Module in a dry box with a desiccant. The recommended temperature and Relative humidity are between 5°C and 30°C and below 50% respectively.
- UV-Module must be stored properly to maintain the device. If the UV-Module is stored for 3 months or more after being shipped from SVC, a sealed container with a nitrogen atmosphere should be used for storage.
- Replace the remained UV-Module into the moisture-proof bag and reseal the bag after work to avoid those UV-Module being exposed to moisture. Prolonged exposure to moisture can adversely affect the proper functioning of the UV-Module.

2) Handling Precautions

- VOCs (Volatile organic compounds) emitted from materials used in the construction of fixtures can penetrate products and discolor them when exposed to heat and photonic energy. The result can be a significant loss of light output from the fixture. Knowledge of the properties of the materials selected to be used in the construction of fixtures can help prevent these issues.
- In case of attaching UV-Module, do not use adhesives that outgas organic vapor.
- Please do not use(or storage) together with the materials containing Sulfur.
- Do not use inflammable material nearby the products.
- Do not touch the products with wet hand
- Do not fix or remodel the products.
- Do not drop the machine, or give strong impact on the products.
- The UV-Module is encapsulated with special material for the highest flux efficiency. So it needs to be handled carefully as below
 - Avoid touching quartz glass parts especially with sharp tools such as Tweezers
 - Avoid leaving fingerprints cover parts.
 - UV-Module will attract dust so use covered containers for storage.
 - It is not recommend to cover the UV-Module with other materials (epoxy, urethane, etc)

3) Safety for eyes and skin

- The Products emit high intensity ultraviolet light which can make your eyes and skin harmful, So do not look directly into the UV light and wear protective equipment during operation.

4) Cleaning

- After assembly the product, empty the water and then wipe the UV-Module with a dry towel.

Precaution for Use

5) Others

- Be sure to turn On / Off after module is connected.
When connecting the module in the power on state, LED can be damaged by the influence of the inrush voltage / current.
- The driving circuit must be designed to allow forward voltage or current only when it is ON or OFF . If the reverse voltage is applied to UV-Module, migration can be generated resulting in LED damage.
- Do not handle this product with acid or sulfur material in sealed space
- Please handle using equipment that prevents static electricity.
- Do not touch unless ESD protection is used.
- Ionizer, grounding and keeping appropriate humidity are necessary for work environment.
- The appearance and specifications of the product may be modified for improvement without notice

