

Contactless cards



LUX-IDENT's products

LUX-IDENT s.r.o., Tovární 368, 563 01 Lanškroun, Czech Republic
Tel.: +420 465 352 500, Fax: +420 465 352 501, e-mail: sales@lux-ident.com
www.lux-ident.com



A range of applications.


Contactless cards come in standard ISO format or clamshell format. Most of the ISO format cards are made from white PVC with a glossy surface, which allows the client to customize the cards through printing. A magnetic strip (HiCo, LoCo) can be added for multiusage cards.

Our contactless cards are available with an exceptionally wide variety of chips and each chip is optimized for ultimate readability. LUX-IDent also offers combi chip cards, cards with two chips on one card. Different combinations in low and high frequency are possible.


Features

- Standard format ISO 7810, 7816
- Clamshell format also possible
- Matt or glossy surfaces
- With or without magnetic strip
- Operating temperature from -20 °C to 50 °C

Dimensions

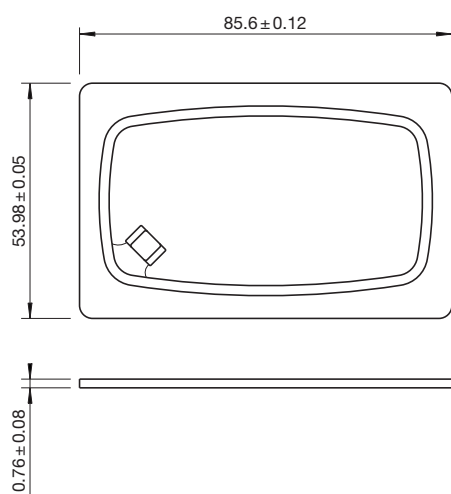

The drawing shows one of many antenna sizes/formats and chip positioning.

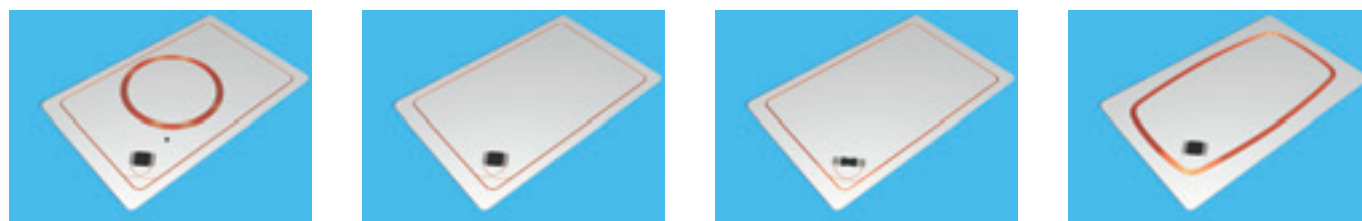

The pictures demonstrate different options how to position one or two contactless technologies in one card.

Available chip technologies

Manufacturer frequency	Chip type
EM Microelectronic	
LF 125 kHz / 134.2 kHz	EM4102, EM4450
NXP	
LF 125 kHz / 134.2 kHz	Hitag 1, Hitag 2, Hitag S 256bit, Hitag S 2048bit
HF 13.56 MHz	Mifare: Ultralight, Ultralight C, Mini, Classic 1K, Classic 4K, Desfire 4K V.06, Desfire 2K EV1, Desfire 4K EV1, Desfire 8K EV1, Plus S 2K, Plus S 4K, Plus X 2K, Plus X 4K I-Code: SLI-L, SLI, SLI-S SmartMX, JCOP
UHF 840–960 MHz	UCODE G2XL, UCODE G2XM
Infineon	
HF 13.56 MHz	Mifare SLE66R35 1K
Atmel	
LF 125 kHz / 134.2 kHz	ATA5577
Inside Secure	
HF 13.56 MHz	Picopass 2K, 32K
Legic	
HF 13.56 MHz	Prime MIM256, Prime MIM1024 Advant: ATC128, ATC256, ATC1024, ATC2048, ATC4096

Other ICs are available upon request.