

2W isolated DC-DC converter with Fixed input voltage, FE

& Unregulated Single Output



FEATURES

- Operating ambient temperature range: -40 $^\circ C$ to +105 $^\circ C$
- High efficiency up to 84%
- Compact SMD package
- I/O isolation test voltage 1.5k VDC
- Internal surface mount design
- No external components required
- Industry standard pin-out
- EN60950 approval

B_XT-2WR2 series is designed for use in distributed power supply systems and especially suitable in applications such as pure digital circuits, low frequency analog circuits, noise and interference cancelling circuits, relay-driven circuits and data switching circuits, where

- 1. The voltage of the input power supply is relatively stable with a variation of \pm 10%Vin or less;
- 2. An input to output isolation voltage of up to 1500VDC is necessary;
- 3. The requirement for ripple & noise or a tight output regulation is not as strict.

Selection	Guide					
	Part No.	Input Voltage (VDC) Output		Full Load	Capacitive	
Certification		Nominal (Range)	Voltage (VDC)	Current(mA) Max./Min.	Efficiency (%) Min./Typ.	Load(µF) Max.
	B0503XT-2WR2		3.3	400/40	68/72	220
	B0505XT-2WR2		5	400/40	75/79	
	B0509XT-2WR2	5 (4.5-5.5)	9	222/22	78/82	
	B0512XT-2WR2	(1.0 0.0)	12	167/17	78/82	
CE	B0515XT-2WR2		15	133/13	79/83	
CE	B1205XT-2WR2		5	400/40	75/79	
	B1209XT-2WR2		9	222/22	78/82	
	B1212XT-2WR2	12 (10.8-13.2)	12	167/17	78/82	
	B1215XT-2WR2	(10.0 10.2)	15	133/13	79/83	
	B1224XT-2WR2		24	83/8	80/84	
	B1505XT-2WR2	15	5	400/40	73/77	
	B1515XT-2WR2	(13.5-16.5)	15	133/13	79/83	
CE -	B2405XT-2WR2		5	400/40	75/79	
	B2409XT-2WR2		9	222/22	78/82	
	B2412XT-2WR2	24 (21.6-26.4)	12	167/17	78/82	
	B2415XT-2WR2		15	133/13	79/83	
	B2424XT-2WR2		24	83/8	80/84	

Input Specifications						
Item	Operating Conditions	Min.	Тур.	Max.	Unit	
	5V input		506/30	/60		
Input Current	12V input		212/25	/50		
(full load / no-load)	15V input		169/18	/35	mA	
	24V input		105/15	/30		
Reflected Ripple Current*			15		_	
	5V input	-0.7		9		
	12V input	-0.7		18		
Surge Voltage (1sec. max.)	15V input	-0.7		21	VDC	
	24V input	-0.7		30		

MORNSUN®

MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

DC/DC Converter B_XT-2WR2 Series

MORNSUN®

Input Filter	Capacitance filter
Hot Plug	Unavailable

Note: * Please refer to DC-DC Converter Application Note for detailed description of Reflected ripple current testing method.

Item	Operating Condition	ons	Min.	Typ.	Max.	Unit
Voltage Accuracy			See output regulation curve (Fig. 1)			Fig. 1)
Linear Desulation	Input voltage	3.3VDC output			±1.5	
Linear Regulation	change: ±1%	Other output			±1.2	
	10%-100% load	3.3VDC output		18		%
		5VDC output		12		
l a sud Da sud atta s		9VDC output		9		
Load Regulation		12VDC output		8		
		15VDC output		7		
		24VDC output		6		
	20MHz bandwidth	24VDC output		100	200	mVp-p
Ripple & Noise*		Other output		100	150	
Temperature Coefficient	Full load				±0.03	%/ ℃
Short Circuit Protection**					1	S

Note: * The "parallel cable" method is used for Ripple and noise test, please refer to DC-DC Converter Application Notes for specific information; ** At the end of the short circuit duration, the supply voltage must be disconnected from the modules.

General Specification	IS					
Item	Operating Cor	Min.	Тур.	Max.	Unit	
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.		1500			VDC
Insulation Resistance	Input-output re	esistance at 500VDC	1000			MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V			20		pF
O	3.3V/5V output	Derating when operating temperature \geq 71°C, (see Fig. 2)	-40		105	
Operating Temperature	Other output	Derating when operating temperature $\geq 85^{\circ}$ C, (see Fig. 2)	-40		105	°C
Storage Temperature			-55		125	
Case Temperature Rise	Ta=25 ℃			25		-
Storage Humidity	Non-condensir	ng			95	%RH
Reflow Soldering Temperature		over 217℃.	≤245℃, maxi For actual ap J-STD-020D.1.			
Switching Frequency	Full load, nominal input voltage			100		KHz
MTBF	MIL-HDBK-217F@25°C		3500			K hours

Mechanical Specifications				
Case Material	Black Epoxy resin; flame-retardant and heat-resistant (UL94-V0)			
Dimensions	12.70 x 11.20 x 7.25 mm			
Weight	1.6g(Typ.)			
Cooling Method	Free air convection			

Electromagnetic Compatibility (EMC)					
Fachalan	CE	CISPR32/EN55032	CLASS B (see Fig. 4 for recommended circuit)		
Emission	RE	CISPR32/EN55032	CLASS B (see Fig. 4 for recommended circuit)		
Immunity	ESD	IEC/EN61000-4-2	Contact ±8KV perf. Criteria B		

MORNSUN®


MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO., LTD.

2019.10.28-A/8 Page 2 of 5


MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

MORNSUN[®]

Typical Characteristic Curves




Output Current Percentage (Nominal Input Voltage)




(Nominal Input Voltage)

Fig. 1








Efficiency Vs Output Load(Vin=5V) 100 90 80 B0505XT-2WR2 70 Efficiency(%) 60 50 40 30 20 10 0 100 10 20 30 40 50 60 70 80 90 Output Current Percentage(%)



MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2019.10.28-A/8 Page 3 of 5

MORNSUN®

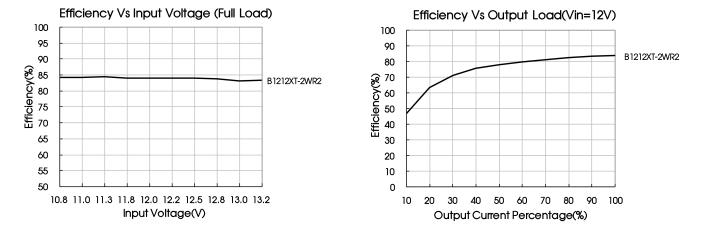

Design Reference

1. Typical application

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig.3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.


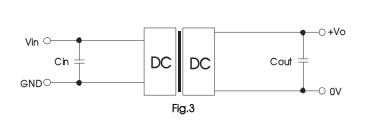


Table 1: Recommended input and output capacitor values						
Vin(VDC)	Cin(µF)	Vo (VDC)	Cout(µF)			
5	4.7	3.3	10			
12	2.2	5	10			
15	2.2	9	4.7			
24	1	12	2.2			
		15	1			
		24	0.47			

2. EMC (CLASS B) compliance circuit

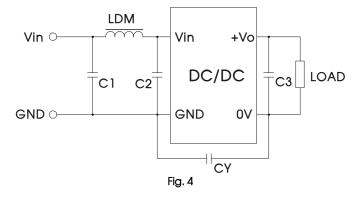

Input v	oltage (VDC)	5/12/15	24
	C1	4.7µF	/50V
	C2	4.7µF /50V	
EMI	C3	Refer to the Cout in Fig.3	
	CY		1nF/2KV
	LDM	6.8µH	

Note: 1. For 24V input models use a Y-capacitor CY of 1nF/2kV.

3. Minimum Output Load Requirement

For a reliable and efficient operation of the converter, the minimum load should never be less than 10% of the rated output load. If the total required output power is below 10%, a parallel bleeding resistor is required on the output, ensuring that the sum of the power consumption is always maintained at 10% minimum.

4. For additional information, please refer to DC-DC converter application notes on www.mornsun-power.com




MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2019.10.28-A/8 Page 4 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Dimensions and Recommended Layout

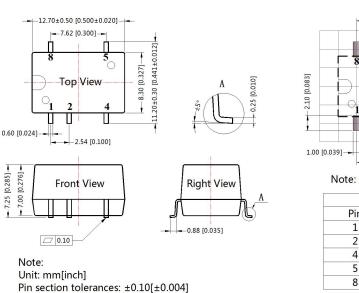

General tolerances: ±0.25[±0.010]

THIRD ANGLE PROJECTION 💮 🔄

7.62 [0.300] -

MORNSUN®

12.20 [0.480]

Top View 1 2 4 1.00 [0.039] - 2.54 [0.100] Note: Grid 2.54*2.54mm Pin-Out Pin Function 1 GND 2 Vin 4 OV

NC: Pin to be isolated from circuitry

+Vo

NC

Notes:

- 1. For additional information on Product Packaging please refer to <u>www.mornsun-power.com.</u> Packaging bag number: 58210024, Roll Packing bag number: 58200054;
- 2. If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- 3. The maximum capacitive load offered were tested at input voltage range and full load;
- 4. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- 5. All index testing methods in this datasheet are based on our company corporate standards;
- 6. We can provide product customization service, please contact our technicians directly for specific information;
- 7. Products are related to laws and regulations: see "Features" and "EMC";
- 8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. ChinaTel: 86-20-38601850Fax: 86-20-38601272E-mail: info@mornsun.cnwww.mornsun-power.com



MORNSUN GUANGZHOU SCIENCE & TECHNOLOGY CO.,LTD.

2019.10.28-A/8 Page 5 of 5

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation