


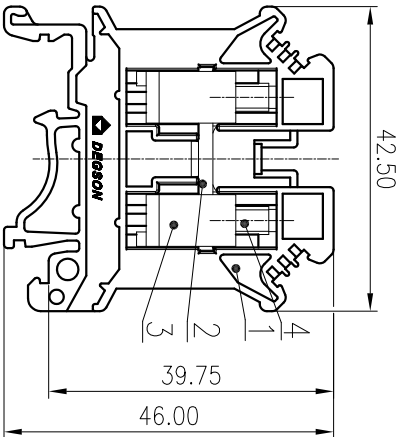


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>10	>18
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.19	±1.50	±2.20
±2.50	±500	±10	±10
±2	±2	±2	±2



ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Current carrier	Copper	
3	Cage	Copper Alloy	M4\Ni Plated
4	Screw	Copper Alloy	M4\Ni Plated

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		600/65	600/65	600/65
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)		800/57	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8.0	/	/
螺丝扭矩/Torque Tightening(N.m/Lb.in)		M4, 1.2/10.53		
绞合范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.2~10/		
间距/Pitch(mm)		10~20(Sol/Str)&6~8(Str)		
剥线长度/Stripping length(mm)		10.20		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		
标准颜色编号/Standard color number:		/		
PANTONE / RAL		/		

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.06.04
 CHKD: Mao J 2020.06.04
 DRFT: LXX 2017.12.25

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: PC10-C01
 TYPE: CUSTOMER DRAWING
 SCALE: X:X
 SHEET 1/1

REV	EON	DESCRIPTION	DRFT	DATE
1				
2				
3				
4				

SIZE: A4
 (mm)
 (inch)

D

C

B

A

1

2

3

4

5

6

D

C

B

A