PRODUCT DATASHEET CS16578_STRADELLA-IP-28-T4B

STRADELLA-IP-28-T4B

Wide IESNA Type IV forward-throw beam for wide area lighting like car parks.

TECHNICAL SPECIFICATIONS:

Dimensions 100.0 x 100.0 mm Height 9.4 mm Fastening screw Ingress protection classes **IP67 ROHS** compliant yes 🕕



MATERIAL SPECIFICATIONS:


Component	Туре	Material	Colour	Finish
STRADELLA-IP-28-T4B	Multi-lens	PMMA	clear	
STRADELLA-28-SEAL	Seal	Silicone	white	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CS16578_STRADELLA-IP-28-T4B	Multi-lens	156	78	78	6.0
» Box size: 476 x 273 x 247 mm					



PRODUCT DATASHEET CS16578_STRADELLA-IP-28-T4B

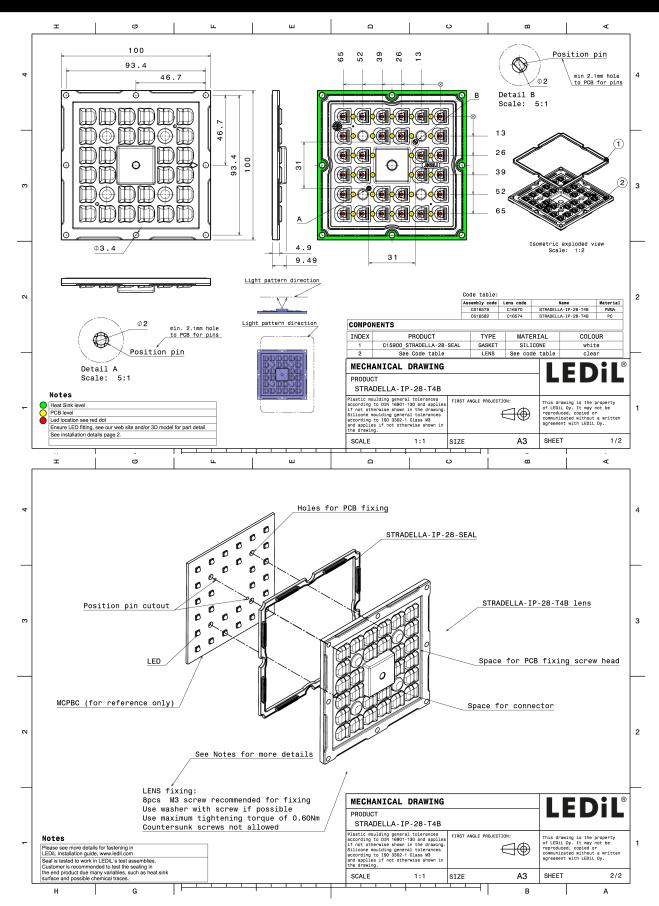

See also our general installation guide: www.ledil.com/installation_guide




PHOTOMETRIC DATA (MEASURED):

CREE . LED


Required components:

LED J Series 3030 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 97 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White



OSRAM


Duris S5 (2 chip) LED FWHM / FWTM Asymmetric Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour Required components:



OSRAM Opto Semiconductors

OSLON Square CSSRM2/CSSRM3 LED

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 96 % Peak intensity 0.6 cd/lm LEDs/each optic Light colour White Required components:




PHOTOMETRIC DATA (SIMULATED):



Required components:


LED XP-G3
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White



OSRAM

Opto Semiconductor

LED OSCONIQ C 2424
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:




SAMSUNG

LED LH231B
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1

White

Required components:




SEOUL SEMICONDUCTOR

Light colour

LED Z8Y22
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:





PRODUCT DATASHEET CS16578_STRADELLA-IP-28-T4B

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

5/5

www.ledil.com/ where_to_buy