


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

Upgrade



Miniature, Long Life, For LED Lighting Series

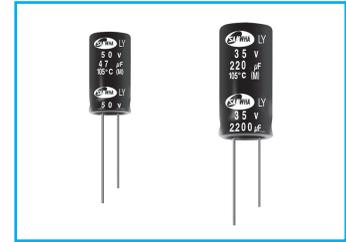


- Miniature, long life
- For LED Lighting
- High reliability withstanding 10000 hours load life at 105°C
- Complied to the RoHS directive



Item	Characteristics																
Operating temperature range	-25 ~ +105°C																
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV or 4μA whichever is greater (after 1 minute)																
Capacitance tolerance	±20% at 120Hz, 20°C																
Dissipation factor max. (at 120Hz, 20°C)	<table border="1"> <tr> <td>WV</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>tanδ</td> <td>0.45</td> <td>0.35</td> <td>0.30</td> <td>0.22</td> <td>0.19</td> <td>0.17</td> <td>0.15</td> </tr> </table>	WV	10	16	25	35	50	63	100	tanδ	0.45	0.35	0.30	0.22	0.19	0.17	0.15
	WV	10	16	25	35	50	63	100									
tanδ	0.45	0.35	0.30	0.22	0.19	0.17	0.15										
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>WV</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>4</td> <td>4</td> </tr> </table>	WV	10	16	25	35	50	63	100	Z-25°C/Z+20°C	8	6	4	4	3	4	4
WV	10	16	25	35	50	63	100										
Z-25°C/Z+20°C	8	6	4	4	3	4	4										
Load life (after application of the rated voltage for 10000 hours at 105°C)	Leakage current	Less than specified value															
	Capacitance change	Within ±25% of the initial value															
	tanδ	Less than 200% of the specified value															
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4																

DRAWING

Unit : mm

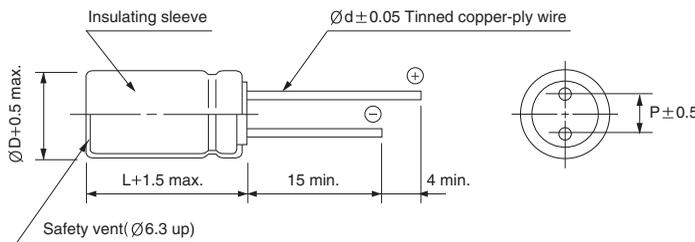

ØD	5	6.3	8
P	2.0	2.5	3.5
Ød	0.5	0.5	0.6

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	10		16		25		35		50		63		100	
	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz	ØD×L (mm)	Ripple current (mA rms) 105°C 100kHz
1.0									5×11	32				
2.2									5×11	42				
3.3									5×11	84				
4.7									5×11	96				
10									5×11	108			6.3×11	205
22									5×11	132	6.3×11	265	8×11.5	240
33					5×11	156	5×11	175	6.3×11	228	6.3×11	265	8×11.5	240
47			5×11	175	5×11	175	6.3×11	252	6.3×11	228	8×11.5	270		
100	5×11	175	6.3×11	252	6.3×11	252	8×11.5	396	8×11.5	324				
220	6.3×11	252	8×11.5	396	8×11.5	396	8×15	430						
330	8×11.5	396	8×11.5	396										

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz≤
~ 33		0.42	0.70	0.90	0.95	1.00
47 ~		0.55	0.73	0.92	0.96	1.00