


2W isolated DC-DC converter
Fixed input voltage, unregulated single output



Patent Protection **RoHS**

Continuous Short
Circuit Protection

FEATURES

- Continuous short-circuit protection
- No-load input current as low as 8mA
- Operating ambient temperature range: -40°C to +85°C
- High efficiency up to 84%
- I/O isolation test voltage: 1.5k VDC
- Industry standard pin-out

B_M-2WR3 series are specially designed for applications where an isolated voltage is required in a distributed power supply system. They are suitable for: pure digital circuits, low frequency analog circuits, relay-driven circuits and data switching circuits.

Selection Guide

Part No.	Input Voltage (VDC)	Output		Full Load Efficiency (%) Min./Typ.	Capacitive Load (µF) Max.
	Nominal (Range)	Voltage (VDC)	Current (mA) Max./Min.		
B1203M-2WR3	12 (10.8-13.2)	3.3	400/40	75/79	2400
B2405M-2WR3	24 (21.6-26.4)	5	400/40	74/80	2400
B2415M-2WR3		15	133/13	78/84	560

Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	12VDC input	3.3VDC output	--	140/8	147/--	mA
	24VDC input	5VDC output	--	105/8	113/--	
		15VDC output	--	100/8	107/--	
Reflected Ripple Current*			--	15	--	
Surge Voltage(1sec. max.)	12VDC input		-0.7	--	18	VDC
	24VDC input		-0.7	--	30	
Input Filter	Capacitance filter					
Hot Plug	Unavailable					

Note: * Reflected ripple current testing method please see DC-DC Converter Application Notes for specific operation.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy			See output regulation curves (Fig. 1)			
Linear Regulation	Input voltage change: ±1%	3.3V output	--	--	±1.5	--
		Others	--	--	±1.2	
Load Regulation	10%-100% load	3.3V output	--	10	20	%
		5V output	--	7	15	
		15V output	--	4	10	
Ripple & Noise*	20MHz bandwidth		--	75	180	mVp-p
Temperature Coefficient	Full load		--	±0.02	--	%/°C
Short Circuit Protection	Continuous, self-recovery					

Notes: * The "parallel cable" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output electric strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC

Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	20	--	pF
Operating Temperature	Derating when operating temperature $\geq 71^\circ\text{C}$ (see Fig. 2)	-40	--	85	°C
Storage Temperature		-55	--	125	
Case Temperature Rise	$T_a=25^\circ\text{C}$	--	25	--	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	
Storage Humidity	Non-condensing	5	--	95	%RH
Vibration		10-150Hz, 5G, 0.75mm. along X, Y and Z			
Switching Frequency	Full load, nominal input voltage	--	260	--	kHz
MTBF	MIL-HDBK-217F@25°C	3500	--	--	k hours

Mechanical Specifications


Case Material	Black plastic; flame-retardant and heat-resistant (UL94-V0)
Dimensions	11.60 x 7.55 x 10.16 mm
Weight	1.6g(Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032 CLASS B
	RE	CISPR32/EN55032 CLASS B
Immunity	ESD	IEC/EN61000-4-2 Air $\pm 8\text{kV}$, Contact $\pm 6\text{kV}$ perf. Criteria B

Note: Refer to Fig.4 for recommended circuit test.

Typical Performance Curves

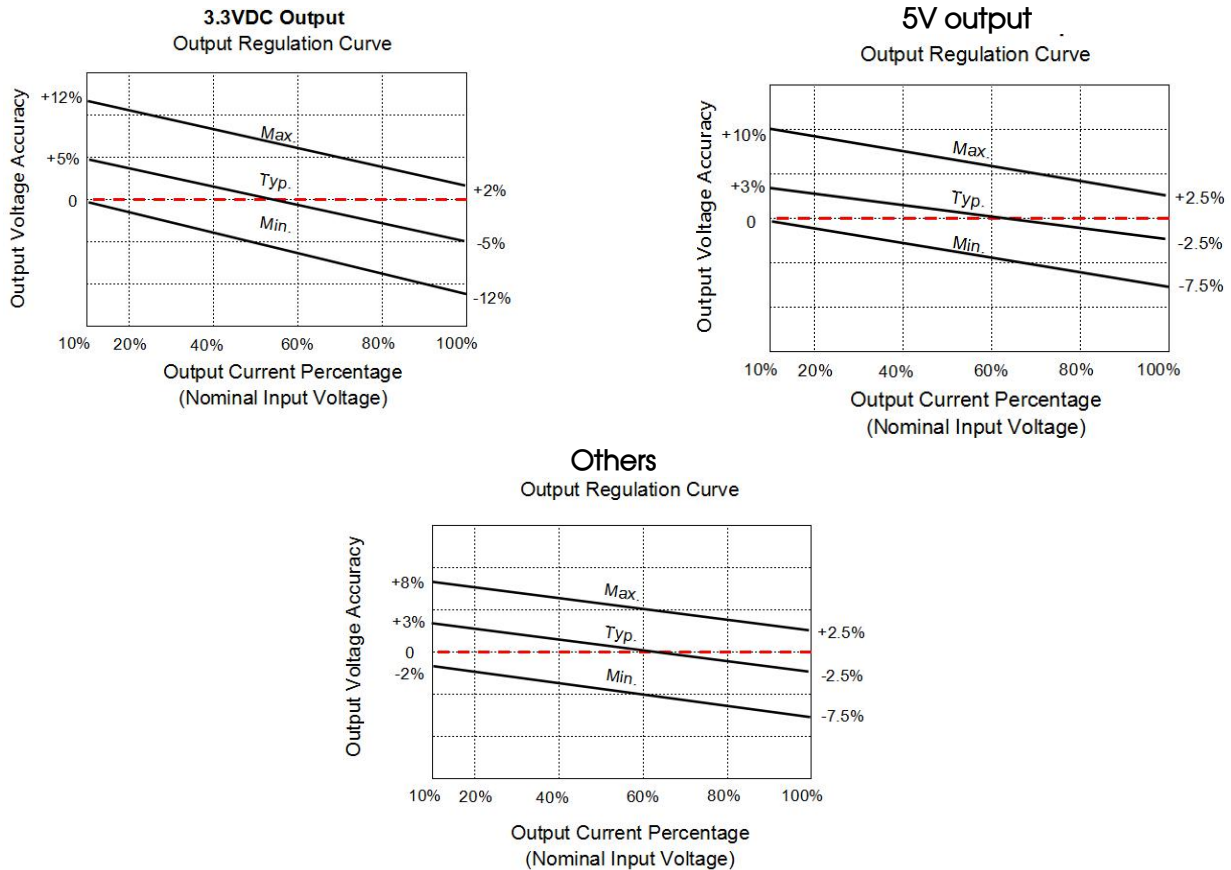



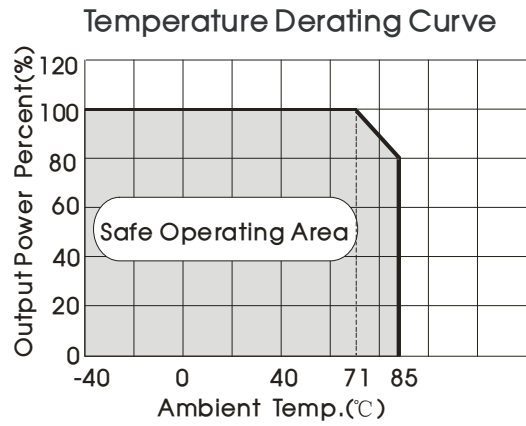


Fig. 2

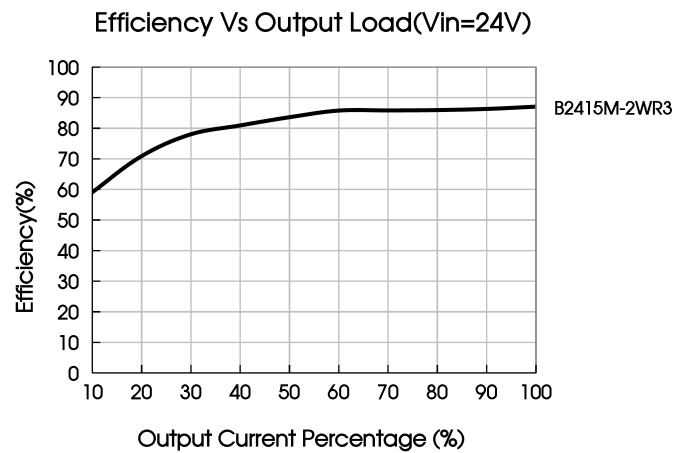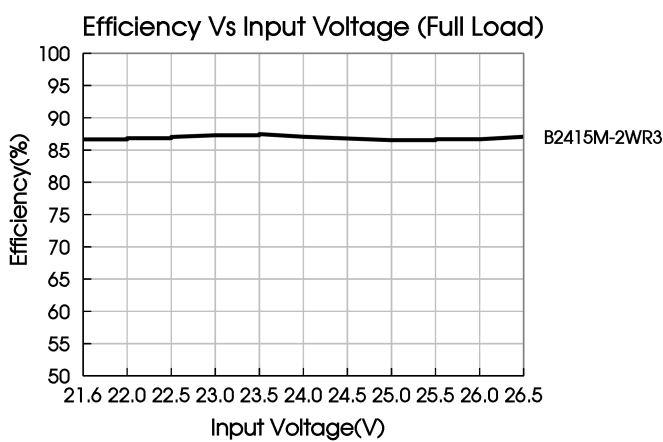

Design Reference

1. Typical application circuit

Input and/or output ripple can be further reduced, by connecting a filter capacitor from the input and/or output terminals to ground as shown in Fig. 3.

Choosing suitable filter capacitor values is very important for a smooth operation of the modules, particularly to avoid start-up problems caused by capacitor values that are too high. For recommended input and output capacitor values refer to Table 1.



Fig. 3

Table 1: Recommended input and output capacitor values

Vin	Cin	Vo	Cout
12VDC	1μF/25V	3.3VDC/5VDC	10μF/16V
24VDC	1μF/50V	15VDC	1μF/25V

2. EMC compliance circuit


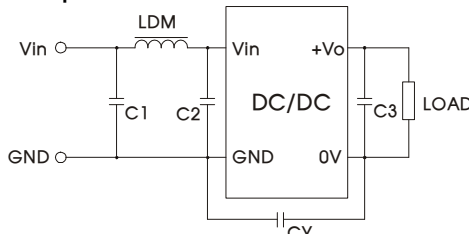


Fig. 4


Emissions	C1/C2	4.7μF /50V
	CY	270pF /2kV
	C3	Refer to Cout in Fig. 3
	LDM	6.8μH

3. For additional information, please refer to DC-DC converter application notes on www.mornsun-power.com.


Dimensions and Recommended Layout

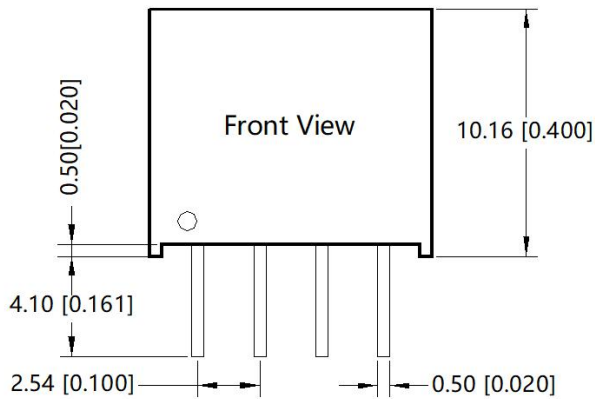

THIRD ANGLE PROJECTION

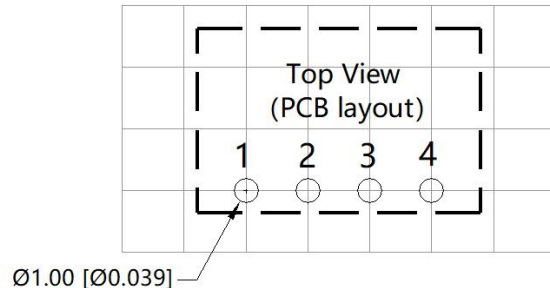

Note: Grid 2.54*2.54mm

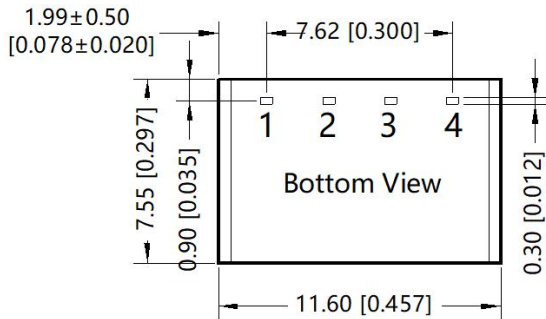

Pin	Mark
1	GND
2	V _{in}
3	0V
4	+V _o

Note:
Unit: mm[inch]
Pin section tolerances: ±0.10[±0.004]
General tolerances: ±0.25[±0.010]

Notes:

- For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58200003;
- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of T_a=25°C, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO 14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui development center, Science Ave., Guangzhou Science City, Huangpu district, Guangzhou, P.R.China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com