

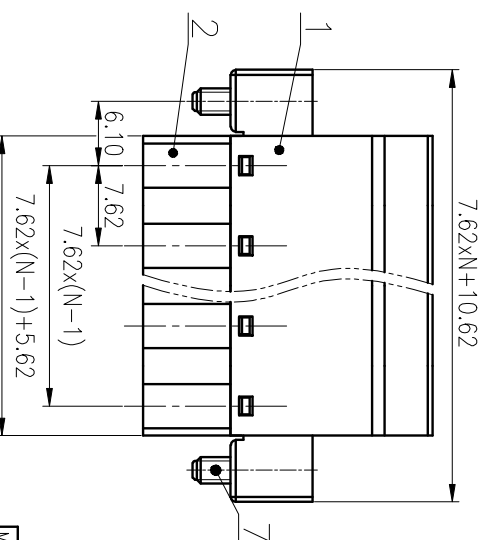
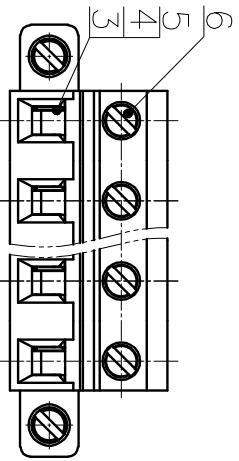
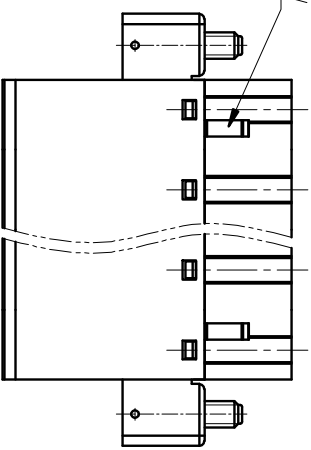


02P: Clasp on the left from this view

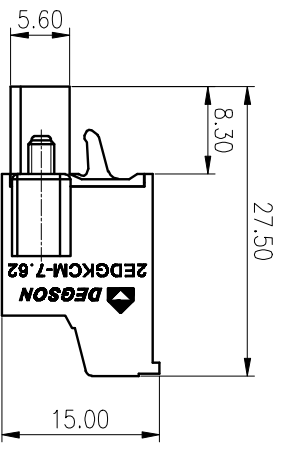

精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.50	±0.80	±1.00	±1.05	±1.15	±1.60	±2.20	±2.50	±2	±2

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/10	150/10	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/行架等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	400/20	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	4	/
额定扭矩/Torque Tightening(N·m/Lb.in)	M2.5, 0.4	3.54	/
线径范围(裸线和绞线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~2.5	28~12	
间距/Pitch(mm)/线数范围/Poles	7.62	N=02~12P	
剥线长度/Stripping length(mm)	9~10		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		



ITEM	NAME OF PART	MATERIAL	NOTES
7	Screw 2	Steel	M2.5/Zn Plated
6	Screw 1	Steel	M2.5/Zn Plated
5	Gage	Steel	M2.5/Zn Plated
4	Block	Steel	Zn Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

MATERIAL: /
 MAT NO.: /
 STATUS: /
 APPD: Lon CHH 2020.06.28
 CHKD: Yu JZh 2020.06.28
 DFT: Y'ndK 2019.08.09
 NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
2EDGCM-7.62-XXP-1Y-00A(H)
 DRAWING NO.: 2EDGCM-7.62-C01
 TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DFT	DATE	SIZE: A4	SCALE: 1:1	REV	T1

