


3W isolated DC-DC converter  
Wide input and regulated single output



CE Patent Protection RoHS

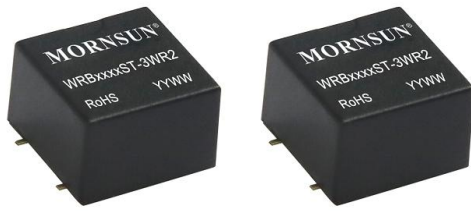

### FEATURES

- Ultra compact DIP/SMD package
- Wide 2:1 input voltage range
- Operating ambient temperature range: -40°C to +85°C
- I/O isolation test voltage: 1.5k VDC
- Short circuit protection (continuous)
- Industry standard pin-out
- EN62368 approved
- Meets UL62368 standards

WRB\_ST/SD-3WR2 series of isolated 3W DC-DC converter products with a 2:1 input voltage range. The product has a ultra-compact DIP/SMD package, operating temperature of -40°C to +85°C and continuous short circuit protection. The ultra-small volume design makes the converters an ideal solution for communications, instrumentation and industrial electronics applications.

### Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Ripple & Noise <sup>②</sup> (mVp-p) Typ./Max.	Full Load Efficiency (%) Min./Typ.	Max. Capacitive Load(μF)
		Nominal (Range)	Max. <sup>①</sup>	Voltage(VDC)	Current (mA) Max./Min.			
CE	WRB1203ST/SD-3WR2	12 (9-18)	20	3.3	758/38	50/100	73/75	2700
	WRB1205ST/SD-3WR2			5	600/30		77/79	2200
	WRB1212ST/SD-3WR2			12	250/13		80/82	680
	WRB1215ST/SD-3WR2			15	200/10		81/83	470
	WRB1224ST/SD-3WR2			24	125/6		79/81	330
	WRB2403ST/SD-3WR2	24 (18-36)	40	3.3	758/38		72/74	2700
	WRB2405ST/SD-3WR2			5	600/30		79/81	2200
	WRB2412ST/SD-3WR2			12	250/13		81/83	680
	WRB2415ST/SD-3WR2			15	200/10		81/83	470
	WRB2424ST/SD-3WR2			24	125/6		81/83	330

Notes: ①Exceeding the maximum input voltage may cause permanent damage;

②Ripple & noise testing condition at nominal input voltage and 5%-100% load, the "tip and barrel" method is used for ripple and noise test, please refer to DC-DC Converter Application Notes for specific information.

### Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load/no-load)	12VDC input voltage	--	314/30	338/50	mA
	24VDC input voltage	--	154/20	163/40	
Reflected Ripple Current	12VDC input voltage	--	40	--	
	24VDC input voltage	--	55	--	
Surge Voltage (1sec. max.)	12VDC input voltage	-0.7	--	25	VDC
	24VDC input voltage	-0.7	--	50	
Start-up Voltage	12VDC input voltage	--	--	9	
	24VDC input voltage	--	--	18	
Input Filter		Capacitance filter			
Hot Plug		Unavailable			

### Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Voltage Accuracy	5%-100% load, input voltage range	--	±1	±3	%
No-load Output Voltage Accuracy	Input voltage range	3.3VDC output	±5	±7	
		Others	±1.5	±5	
Linear Regulation	Input voltage variation from low to high at full load	--	±0.2	±0.5	

Load Regulation	5%-100% load	--	±0.5	±1	%
Transient Recovery Time	25% load step change	--	1	3	ms
Transient Response Deviation		--	±2.5	±5	%
Temperature Coefficient	Full load	--	--	±0.03	%/°C
Short-circuit Protection		Continuous, self-recovery			

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output insulation at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100KHz/0.1V	--	100	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	°C
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	
Reflow Soldering Temperature		Peak temperature ≤245°C, duration ≤60s max. over 217°C. see also IPC/JEDEC J-STD-020D.1.			
Storage Humidity	Non-condensing	--	--	95	%RH
Switching Frequency (PFM Mode)	Full load, nominal input voltage	--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours


Mechanical Specifications





Case Material	Black flame-retardant and heat-resistant plastic	
Dimension	WRB_SD-3WR2	14.00 x 14.00 x 9.00 mm
	WRB_ST-3WR2	15.00 x 14.00 x 9.10 mm
Weight	2.2g(Typ.)	
Cooling Method	Free air convection	

Electromagnetic Compatibility (EMC)

Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 3-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig. 3-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (see Fig. 3-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig. 3-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

Product Characteristic Curve

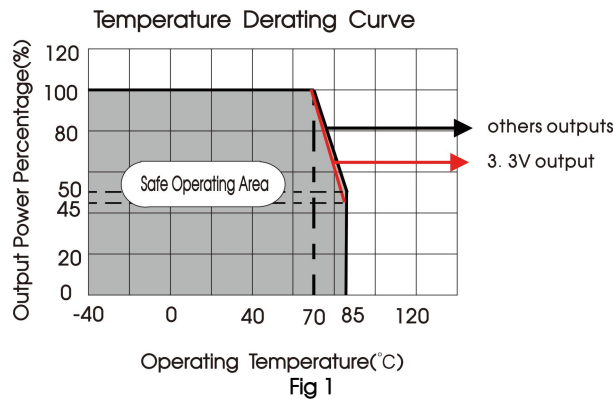

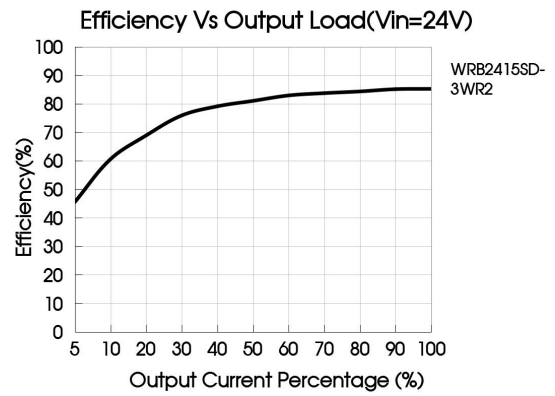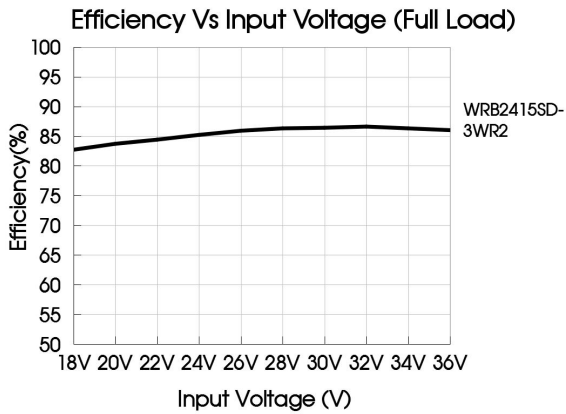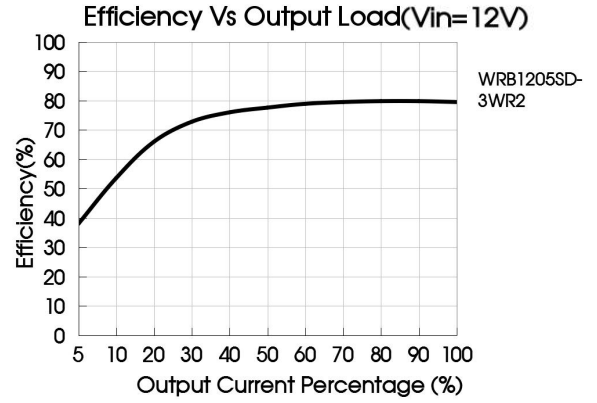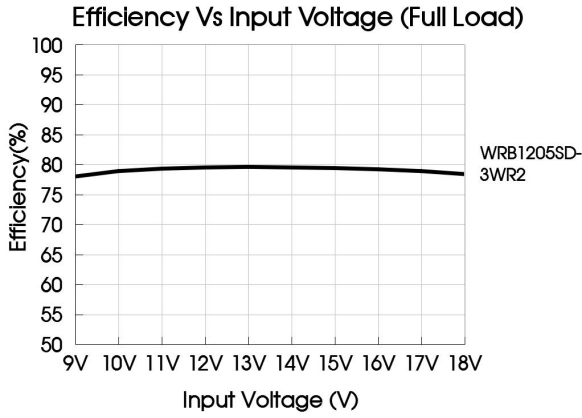


## Design Reference

### 1. Recommended circuit

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.


Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$ , connecting a "Y" capacitor between input "GND" and output "0V", and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the max. capacitive load value of the product.

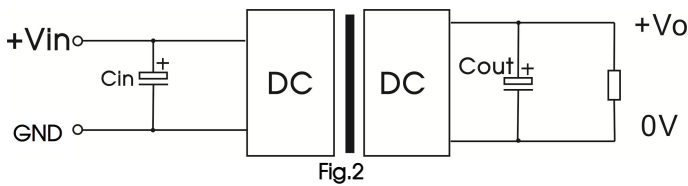

Parameter description:

Parameter	Vin=12VDC	Vin=24VDC
Vin(VDC)	12	24
Cin	47uF/25V	47uF/50V
Vo(VDC)	3.3, 5	12, 15, 24
Cout	100uF/6.3V	27uF/35V

### 2. EMC compliance circuit

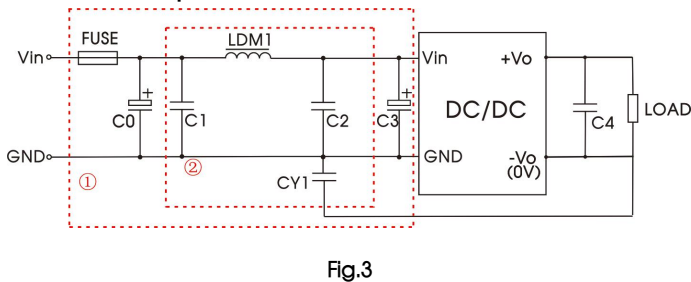

Parameter description:

Part No.	Vin:12VDC					Vin:24VDC				
	3.3	5	12	15	24	3.3	5	12	15	24
Vo (VDC)	3.3	5	12	15	24	3.3	5	12	15	24
FUSE	slow blow, choose according to actual input current									
C0	1000uF/25V					680uF/50V				
C1	10uF/50V	4.7uF/50V	10uF/50V	4.7uF/50V	10uF/50V	10uF/50V	4.7uF/50V	10uF/50V	4.7uF/50V	10uF/50V
LDM1	15uH									
C2	4.7uF/50V									
C3	330uF/50V									
CY1	1nF/2KV									
C4	Refer to the Cout Fig.2									

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.

### 3. Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module(see Fig. 4).

Generally: Vin=12V series Iave =600mA  
Vin=24V series Iave =300mA




Fig. 4

### 4. Output load requirements

When using, the minimum load of the module output should not be less than 5% of the nominal load. In order to meet the performance parameters of this datasheet, please connect a 5% dummy load in parallel at the output end, the dummy load is generally a resistor, please note that the resistor needs to be used in derating.



### 5. For additional information please refer to DC-DC converter application notes on

[www.mornsun-power.com](http://www.mornsun-power.com)

## Dimensions and Recommended Layout

### WRB\_SD-3WR2 series

THIRD ANGLE PROJECTION

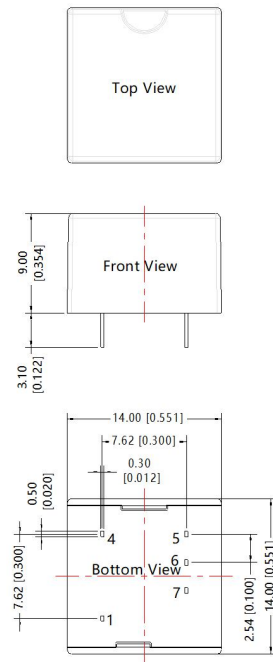


Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	NC
7	0V

Note:  
Unit: mm[inch]  
Pin diameter tolerances: ±0.10[±0.004]  
General tolerances: ±0.50[±0.020]

WRB\_ST-3WR2 series

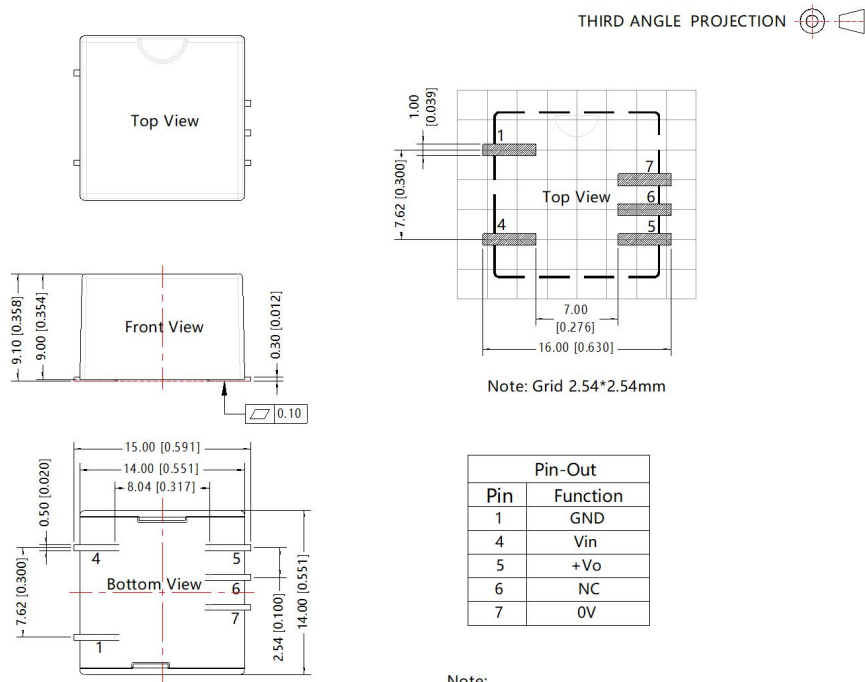

Note:  
Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10[\pm 0.004]$   
General tolerances:  $\pm 0.50[\pm 0.020]$

Notes:

1. For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58210095, Roll packaging bag number: 58210094;
2. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
3. The maximum capacitive load offered were tested at input voltage range and full load;
4. Unless otherwise specified, data in this datasheet should be tested under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated load;
5. All index testing methods in this datasheet are based on company corporate standards;
6. We can provide product customization service, please contact our technicians directly for specific information;
7. Products are related to laws and regulations: see "Features" and "EMC";
8. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

MORNSUN Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)