
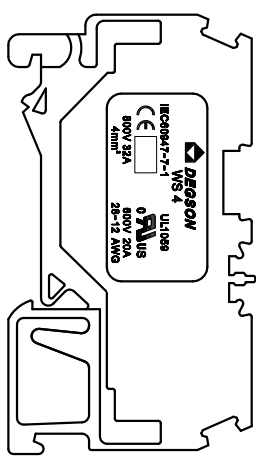
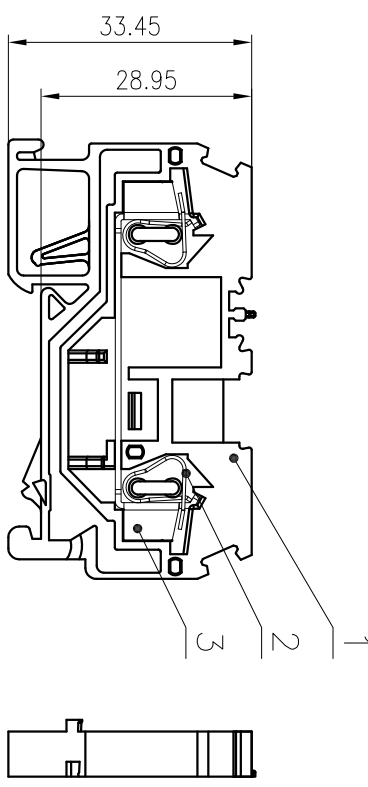


未注公差/General tolerances(mm)		0.1/10	
0	>3	>5	>400
3	~ 6	~ 10	~ 500
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50		

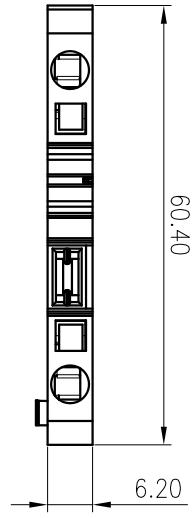

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	600/20	600/20	600/5
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	800/32	/	/
额定脉冲电压 (KV) / Rate Impulse Voltage (KV)	8.0		
线径范围 (硬线和软线) / Wire Range (rigid and flexible)(mm²/AWG)	0.2~4/28~12		
间距/Pitch(mm)	6.20		
剥线长度/Stripping length(mm)	13-14		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	PANTONE / RAL		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: LI GL 2020.04.04
 CHKD: Mao J 2020.04.04
 DRAFT: Wang LX 2020.04.04

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD
 DRAWING NO.: WS4-C01
 TYPE: CUSTOMER DRAWING

ITEM	NAME OF PART	MATERIAL	NOTES
3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0

REV	ECN	DESCRIPTION	DRAFT	DATE

SIZE: A4	SCALE: 1:1	SHEET
mm / inch		1/1