



公差表/General Tolerances(mm)		0.1/10
0	>3	~
3	>6	~
6	>10	~
10	>18	~
18	>30	~
30	>50	~
50	>80	~
80	>120	~
120	>180	~
180	>250	~
250	>315	~
315	>400	~
400	>500	~
500	>500	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.80	±1.05
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50
		±2°

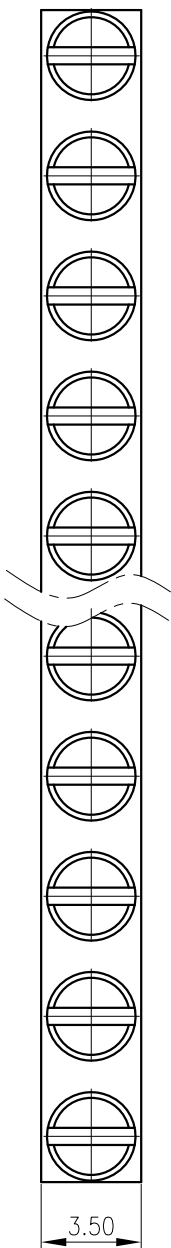

$$4.2X(N-1)+3.2$$

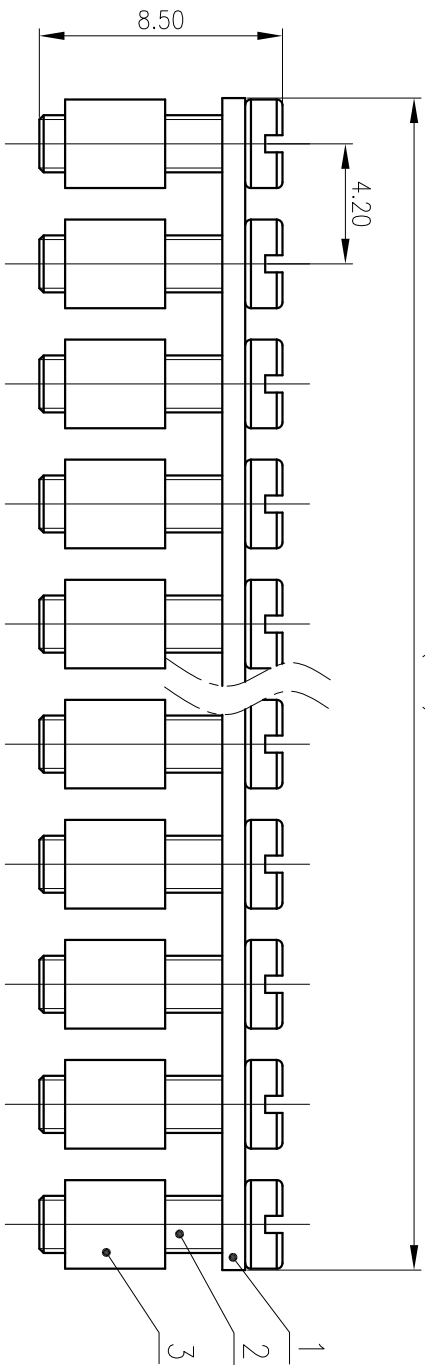

3	Pillar	Copper Alloy	M2/Ni Plated
2	Screw	Copper Alloy	M2/Ni Plated
1	Current carrier	Copper	Sn Plated
ITEM	NAME OF PART	MATERIAL	NOTES
	螺丝扭矩/Torque Tightening(N.m/Lb.in)		M2: 0.2/1.77
	间距/Pitch(mm)	线数范围/Poles	4.02/N=02~10P
	使用温度范围/Operating temperature(°C)		-40~+105
	符合RoHS环保要求/Conform to RoHS		Yes

MATERIAL: SURFACE:

MAT NO.:

STATUS:

APPD: Li GL 2020.06.06

CHKD: Mgo J 2020.06.06

DRFT: Feng X 2020.05.22

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: FBRI XX-4

DRAWING NO.: FBRI 10-4-C01

TYPE: CUSTOMER DRAWING

SCALE: 4:1 SHEET 1/1

REV ECN DESCRIPTION DRFT DATE

SIZE: A4

mm
inch

SCALE: 4:1 SHEET 1/1