
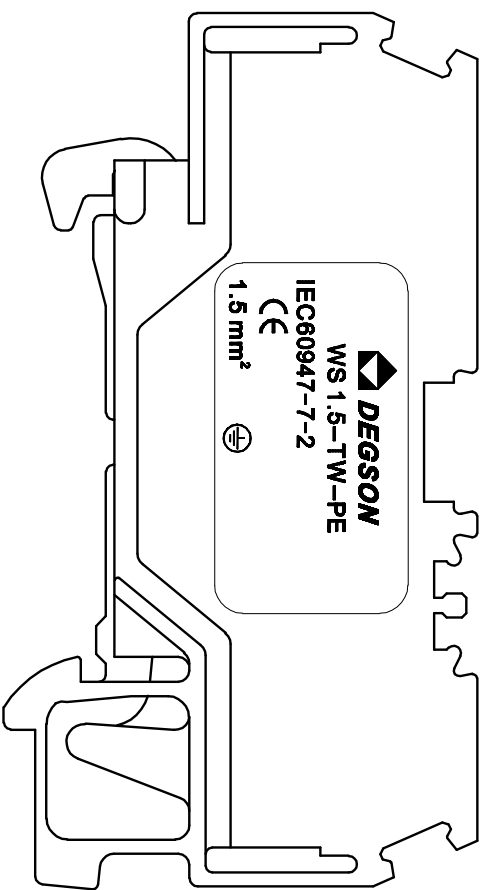
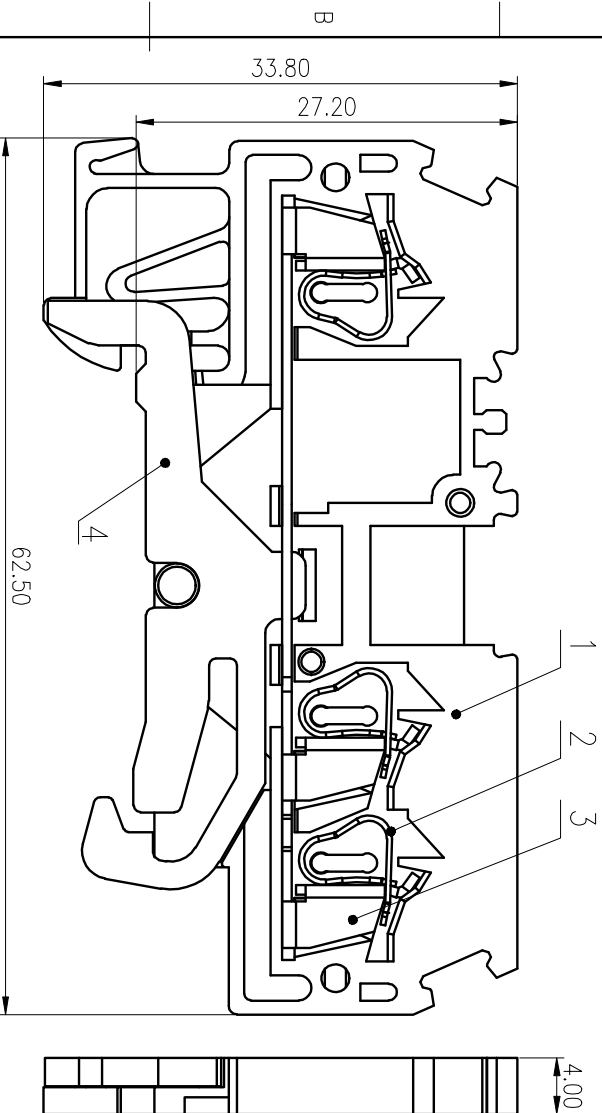


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±Z
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50														



ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Spring	Stainless steel	
3	Current carrier	Copper	Sn Plated
4	Grounding	Copper alloy	Sn Plated

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				

MATERIAL: /	SURFACE: /
MAT NO.: /	
STATUS: /	
APPD: Li GL 2020.05.30	NAME: DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
CHKD: Mao J 2020.05.30	WS1.5-TW-PE-01P-1C-00A(H)
DRAFT:ZhengQG 2020.05.16	DRAWING NO.: WS1.5-TW-PE-C01
SIZE: A4	TYPE: CUSTOMER DRAWING
SCALE: 1:1	SCALE: 1:1
	REV T1
	1/1 SHEET

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	/	/	/
额定脉冲电压 (KV)/Rate Impulse Voltage(KV)	8.0	/	/
线径范围 (硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~1.5/28~16	/	/
厚度/Pitch(mm)	4.0	/	/
剥线长度/Stripping length(mm)	12~13	/	/
使用温度范围/Operating Temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/