

10W isolated DC-DC converter in DIP package,  
Wide input and regulated dual/single output



Patent Protection RoHS  
EN62368-1



## FEATURES

- Wide 2:1 input voltage range
- High efficiency up to 88%
- No load power consumption as low as 0.12W
- I/O isolation test voltage 1.5k VDC
- Input under-voltage protection, output short-circuit, over-current, over-voltage protection
- Operating ambient temperature range: -40°C to +85°C
- Input reverse polarity protection available with chassis(A2S) or Din-Rail mounting(A4S) version
- Meets CISPR32/EN55032 CLASS A, without extra components
- Industry standard pin-out

VRA\_YMD-10WR3 & VRB\_YMD-10WR3 series are isolated 10W DC-DC converter products with a 2:1 input voltage range. They feature efficiencies up to 88%, 1500VDC input to output isolation, operating temperature of -40°C to +85°C, input under-voltage protection, output over-voltage, over-current and short-circuit protection. They meet CLASS A CISPR32/EN55032 EMI standards(except 5VDC nominal input) without external components, optional packages are offered for chassis or DIN-rail mounting (A2S, A4S), adding additional input reverse polarity protection, which make them widely applied in applications such as industrial controls, electric power, instrumentation and communications.

## Selection Guide

Certification	Part No. <sup>①</sup>	Input Voltage (VDC)		Output		Full Load Efficiency <sup>④</sup> (%) Min./Typ.	Max. Capacitive Load <sup>⑤</sup> (μF)
		Nominal <sup>②</sup> (Range)	Max. <sup>③</sup>	Voltage (VDC)	Current(mA) Max./Min.		
EN	VRA0505YMD-10WR3	5 (4.5-9)	12	±5	±1000/0	76/78	1000
	VRA0512YMD-10WR3			±12	±417/0	81/83	470
	VRA0515YMD-10WR3			±15	±334/0	82/84	330
	VRA0524YMD-10WR3			±24	±209/0	81/83	100
--	VRB0503YMD-10WR3	12 (9-18)	20	3.3	2500/0	82/84	470
EN	VRB0505YMD-10WR3			5	2000/0	83/85	470
	VRB0512YMD-10WR3			12	834/0	81/83	470
	VRB0515YMD-10WR3			15	667/0	82/84	330
	VRB0524YMD-10WR3			24	417/0	81/83	100
--	VRB1205YMD-10WR3			5	2000/0	81/83	2200
EN	VRB2405YMD-10WR3	24 (18-36)	40	5	2000/0	81/83	2200
	VRB2412YMD-10WR3			12	833/0	85/87	470
	VRB2415YMD-10WR3			15	667/0	86/88	330
	VRB2424YMD-10WR3			24	416/0	86/88	100
--	VRB4803YMD-10WR3	48 (36-75)	80	3.3	2400/0	77/79	2200
	VRB4805YMD-10WR3			5	2000/0	81/83	2200
	VRB4812(X <sup>⑥</sup> )YMD-10WR3			12	833/0	85/87	470
	VRB4815(X)YMD-10WR3			15	667/0	85/87	330
	VRB4824YMD-10WR3			24	416/0	86/88	100

### Notes:

- ①Use "A2S" suffix for chassis mounting and "A4S" suffix for Din-Rail mounting;
- ②The A2S and A4S Model's start-up and minimum input voltages are increased by 1VDC due to the input reverse polarity protection circuit;
- ③Exceeding the maximum input voltage may cause permanent damage;
- ④Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model's is decreased by 2% due to the input reverse polarity protection circuit;
- ⑤The specified maximum capacitive load value for Vo1 and Vo2 output is identical;
- ⑥ "X" means product without Ctrl pin;

## Input Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Current (full load / no load)	5VDC nominal input series, nominal input voltage	3.3V output	--	1964/100	2012/150	mA
		5V output	--	2353/100	2410/150	
		Others	--	2500/10	2564/30	
	12VDC nominal input series, nominal input voltage		--	1004/5	1029/12	
	24VDC nominal input series, nominal input voltage		--	502/5	515/12	
	48VDC nominal input series, nominal input voltage	3.3V output	--	208/4	215/8	
		Others	--	251/4	258/8	
	5VDC / 12VDC nominal input series		--	50	--	
	24VDC nominal input series		--	40	--	
	48VDC nominal input series		--	30	--	
Surge Voltage (1sec. max.)	5VDC nominal input series		-0.7	--	16	VDC
	12VDC nominal input series		-0.7	--	25	
	24VDC nominal input series		-0.7	--	50	
	48VDC nominal input series		-0.7	--	100	
Start-up Voltage	5VDC nominal input series		--	--	4.5	
	12VDC nominal input series		--	--	9	
	24VDC nominal input series		--	--	18	
	48VDC nominal input series		--	--	36	
Input Under-voltage Protection	5VDC nominal input series		3	3.5	--	
	12VDC nominal input series		5.5	6.5	--	
	24VDC nominal input series		12	15.5	--	
	48VDC nominal input series		26	30	--	
Start-up Time	Nominal input voltage & constant resistance load		--	10	--	ms
Input Filter	Pi filter					
Hot Plug	Unavailable					
Ctrl*	Module on	Ctrl pin open or pulled high TTL (3.5-12VDC)				
	Module off	Ctrl pin pulled low to GND (0-1.2VDC)				
	Input current when off	--	6	10	mA	

Note: \*The Ctrl pin voltage is referenced to input GND, VRB\_XYMD-10WR3 series without Ctrl pin.

## Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Voltage Accuracy	0%-100% load	5VDC input, 3.3VDC output	--	±1	±3	%
		5VDC input, other output	--	±1	±2	
		Negative output	--	±1	±3	
		Others	--	±1	±3	
Linear Regulation	Input voltage variation from low to high at full load	5VDC input	Singe output	--	±0.5	
			Dual output	--	±1	
		Others	--	±0.2	±0.5	
		24VDC input	--	±0.5	±1	
Load Regulation <sup>①</sup>	0%-100% load	5VDC input, 3.3VDC output	--	--	±2	
		5VDC input, other output	Singe output	--	±1	
		Dual output	--	--	±1.5	
		24VDC input	--	±0.5	±1	
Cross Regulation	12VDC/48VDC input		--	±0.5	±1	%
	VRB0503YMD-10WR3		--	--	±1	
Transient Recovery Time	25% load step change, nominal input voltage		--	300	500	μs

Transient Response Deviation	25% load step change, nominal input voltage	±5V output, VRB4803YMD-10WR3, VRB4805YMD-10WR3, VRB0503YMD-10WR3	--	±5	±8	%
		Others	--	±3	±5	
Temperature Coefficient	Full load	--	--	±0.03	%/°C	
Ripple & Noise <sup>②</sup>	20MHz bandwidth, 5%-100% load	--	40	100	mV p-p	
Over-voltage Protection		110	--	160	%Vo	
Over-current Protection	Input voltage range	110	140	190	%Io	
Short-circuit Protection		Continuous, self-recovery				

Note: ① Load regulation for 0% -100% for 12VDC/48VDC nominal input series parts to ±5%;

② Ripple & Noise at < 5% load is 5%Vo max. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

### General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	1000	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5	--	95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Vibration		10-150Hz, 5G, 90 Min. along X, Y and Z			
Switching Frequency*	PWM mode	--	350	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours

Note: \*Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

### Mechanical Specifications

Case Material	Aluminum alloy		
Dimensions	Horizontal package		25.40 x 25.40 x 11.70 mm
	A2S chassis mounting		76.00 x 31.50 x 21.20 mm
	A4S DIN-rail mounting		76.00 x 31.50 x 25.80 mm
Weight	VRB0505YMD-10WR3, VRB0503YMD-10WR3	Horizontal package/A2S wiring package/A4S rail package	15.0g /38.5g /58.5g (Typ.)
	Others		12.5g /36.0g /56.0g(Typ.)
Cooling Method	Free air convection		



### Electromagnetic Compatibility (EMC)

Emissions	CE	5VDC nominal input	CISPR32/EN55032 CLASS B (see Fig.5-② for recommended circuit)		
		12VDC nominal input	CISPR32/EN55032 CLASS A (without extra components.)/ CLASS B (see Fig.4-② for recommended circuit)		
		24VDC nominal input	CISPR32/EN55032 CLASS A (without extra components.)/ CLASS B (see Fig.3-② for recommended circuit)		
		48VDC nominal input	CISPR32/EN55032 CLASS B (see Fig.3-② for recommended circuit)		
Immunity	RE	5VDC nominal input	CISPR32/EN55032 CLASS B (see Fig.5-② for recommended circuit)		
		12VDC nominal input	CISPR32/EN55032 CLASS A (without extra components.)/CLASS B(see Fig.4-② for recommended circuit)		
		24VDC nominal input	CISPR32/EN55032 CLASS A (without extra components.)/CLASS B(see Fig.3-② for recommended circuit)		
		48VDC nominal input	CISPR32/EN55032 CLASS B (see Fig.3-② for recommended circuit)		
Immunity	ESD	5VDC nominal input	IEC/EN61000-4-2 Contact ±6kV		perf. Criteria B
		Others	IEC/EN61000-4-2 Contact ±4kV		perf. Criteria B
Immunity	RS	IEC/EN61000-4-3	10V/m		perf. Criteria A

EFT	Others	IEC/EN61000-4-4	$\pm 2\text{kV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	5VDC nominal input	IEC/EN61000-4-4	$\pm 2\text{kV}$ (see Fig.5-① for recommended circuit)	perf. Criteria B
	12VDC nominal input	IEC/EN61000-4-4	$\pm 2\text{kV}$ (see Fig.4-① for recommended circuit)	perf. Criteria B
Surge	Others	IEC/EN61000-4-5	line to line $\pm 2\text{kV}$ (see Fig.3-① for recommended circuit)	perf. Criteria B
	5VDC nominal input	IEC/EN61000-4-5	line to line $\pm 2\text{kV}$ (see Fig.5-① for recommended circuit)	perf. Criteria B
	12VDC nominal input	IEC/EN61000-4-5	line to line $\pm 2\text{kV}$ (see Fig.4-① for recommended circuit)	perf. Criteria B
CS		IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

### Typical Characteristic Curves

5VDC input series, except 3.3VDC output

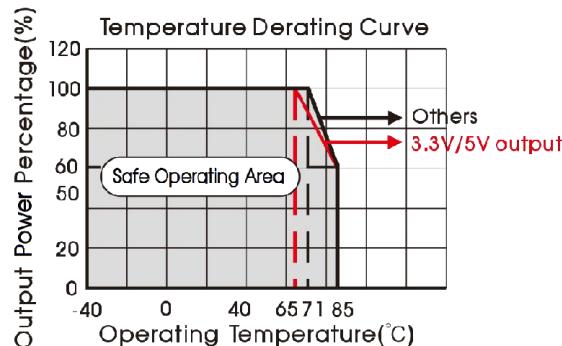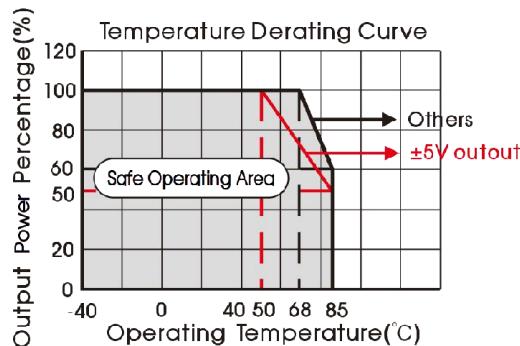

5VDC input series, 3.3VDC output





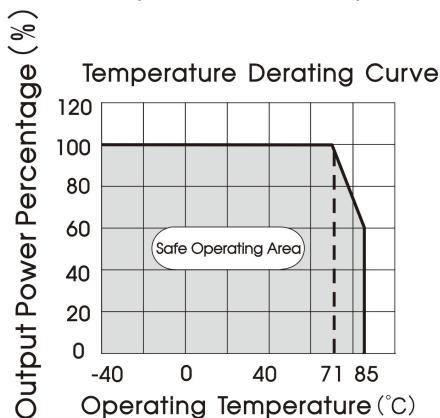


Fig. 1

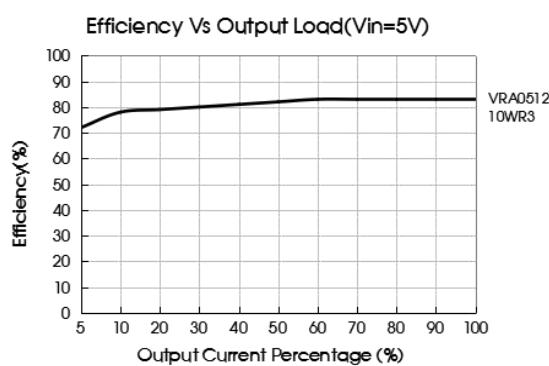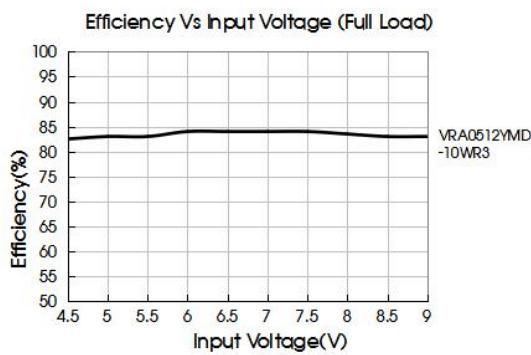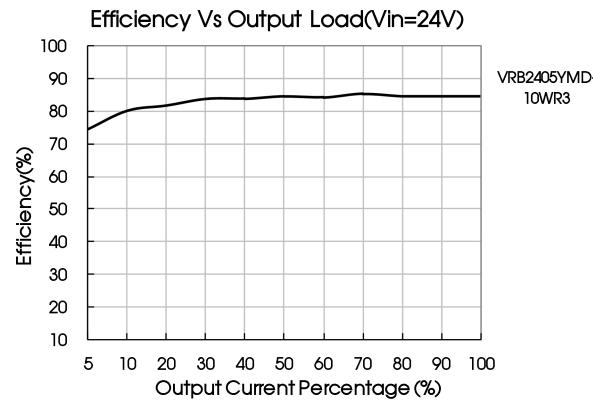

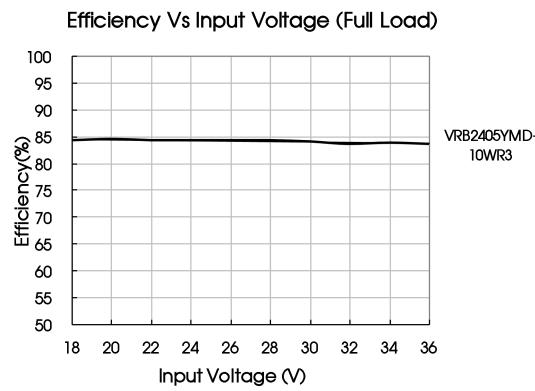

## Design Reference

### 1. Typical application

All DC-DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2. Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$  and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

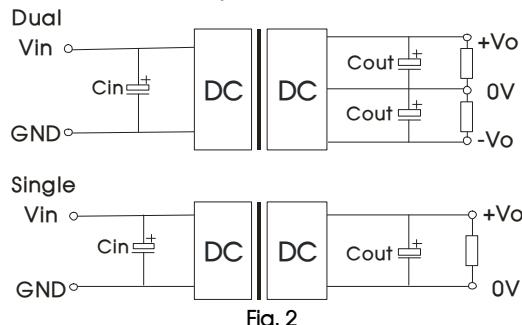


Fig. 2

Vin(VDC)	$C_{in}(\mu F)$	$C_{out}(\mu F)$
5	100 $\mu F$ /16V	$V_o(3.3/5/\pm 5):10\mu F/16V$
12	100 $\mu F$ /25V	$V_o(12/\pm 12/15/\pm 15V):10\mu F/25V$
24	100 $\mu F$ /50V	$V_o(24/\pm 24V):10\mu F/50V$
48	100 $\mu F$ /100V	

### 2. EMC compliance circuit

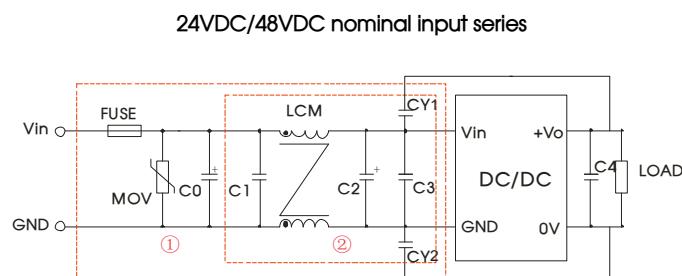


Fig. 3

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.

#### Parameter description:

Model	Vin:24V	Vin:48V
FUSE	Select fuse value according to actual input current	
MOV	S20K30	S14K60
C0	680 $\mu F$ /50V	680 $\mu F$ /100V
C1	1 $\mu F$ /50V	1 $\mu F$ /100V
C2	330 $\mu F$ /50V	330 $\mu F$ /100V
C3	4.7 $\mu F$ /50V	4.7 $\mu F$ /100V
C4	Refer to the $C_{out}$ in Fig.2	
LCM	4.7mH, recommended to use MORNSUN FL2D-30-472	
CY1, CY2	1nF/2kV	

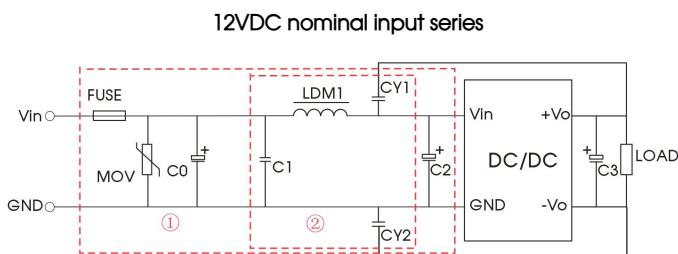


Fig. 4

Notes: For EMC tests we use Part ① in Fig. 4 for immunity and part ② for emissions test. Selecting based on needs.

Parameter description:

Model	Vin:12V
FUSE	Select fuse value according to actual input current S20K30
MOV	S20K30
C0, C2	330μF/50V
C1	1μF/50V
C3	Refer to the Cout in Fig.2
LDM1	4.7μH
CY1, CY2	1nF/2kV

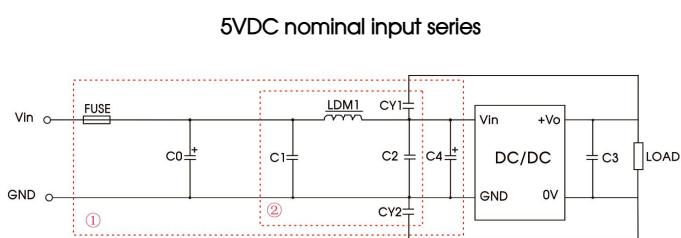


Fig. 5

Notes: For EMC tests we use Part ① in Fig. 5 for immunity and part ② for emissions test. Selecting based on needs.


Parameter description:

Model	Vin: 5V
FUSE	Select fuse value according to actual input current 2200μF/35V
C0, C2	4.7μF/50V
C3	Refer to the Cout in Fig.2
C4	1000μF/35V
LDM1	4.7μH
CY1, CY2	1nF/2kV

3. The products do not support parallel connection of their output.


4. For additional information please refer to DC-DC converter application notes on [www.mornsun-power.com](http://www.mornsun-power.com)

### VRA(B)\_YMD-10WR3 Dimensions and Recommended Layout

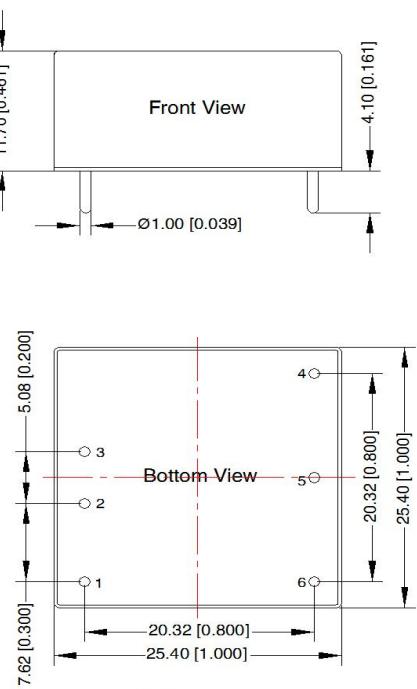

Note:  
Unit: mm[inch]  
Pin diameter tolerances:  $\pm 0.10$  [ $\pm 0.004$ ]  
General tolerances:  $\pm 0.50$  [ $\pm 0.020$ ]


THIRD ANGLE PROJECTION

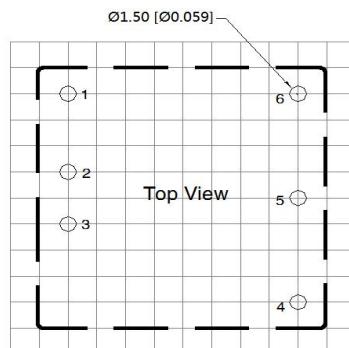

Note: Grid 2.54\*2.54mm


Pin-Out		
Pin	Single	Dual
1	Ctrl	Ctrl
2	GND	GND
3	Vin	Vin
4	+Vo	+Vo
5	No Pin	0V
6	0V	-Vo

VRB\_XYMD-10WR3 Dimensions and Recommended Layout

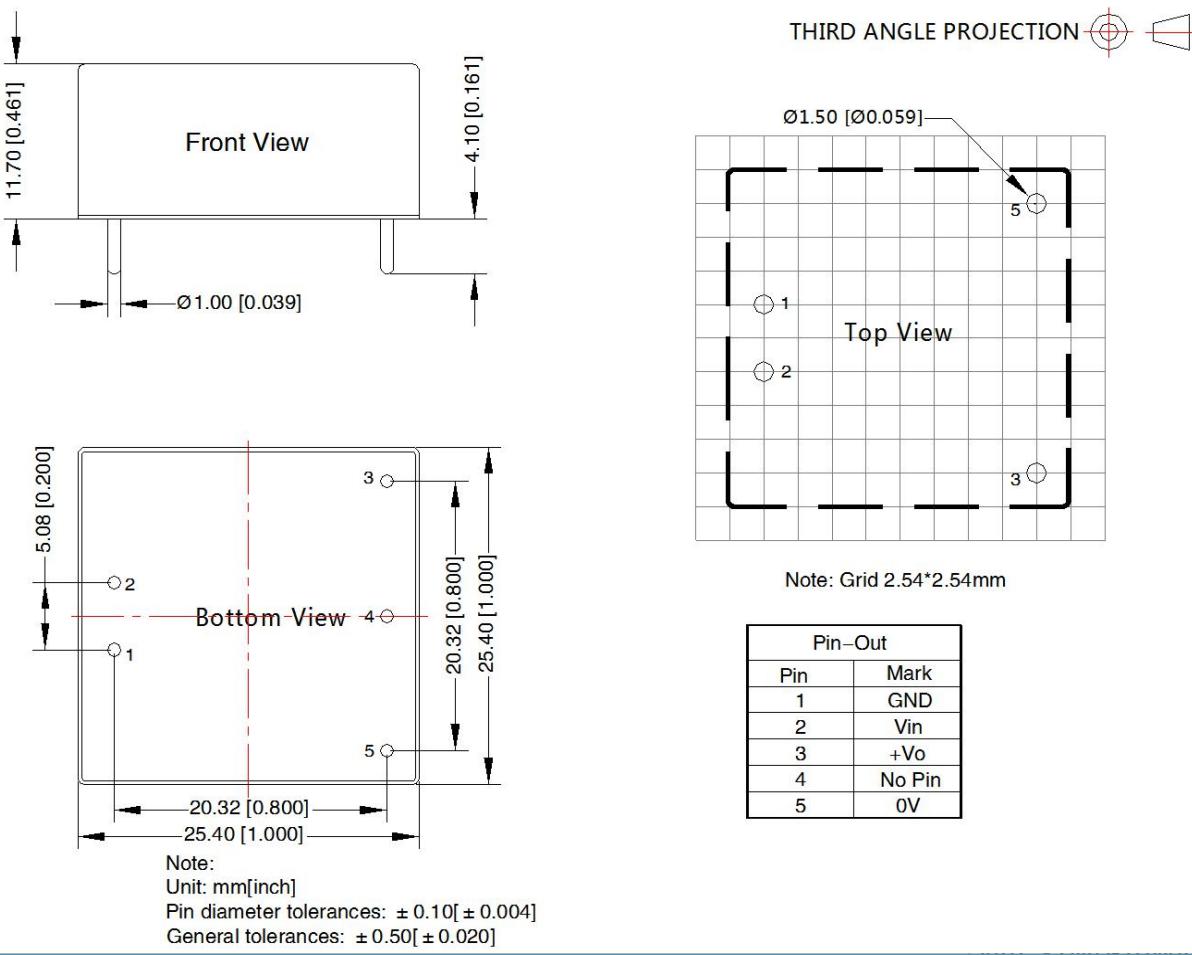

THIRD ANGLE PROJECTION


VRA\_YMD-10WR3A2S & VRB\_YMD-10WR3A2S Dimensions

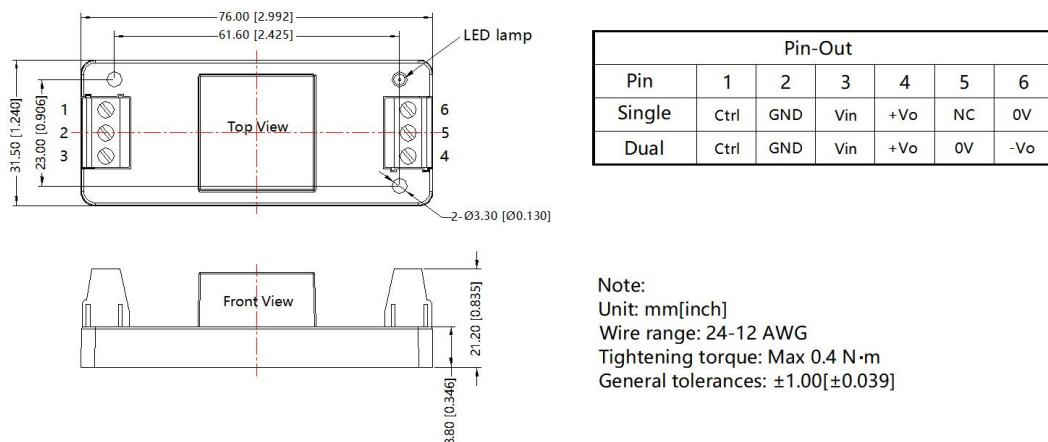


**Note:**  
Unit: mm[inch]  
Wire range: 24-12 AWG  
Tightening torque: Max 0.4 N·m  
General tolerances: ±1.00[±0.039]

VRA\_YMD-10WR3A4S & VRB\_YMD-10WR3A4S Dimensions

THIRD ANGLE PROJECTION

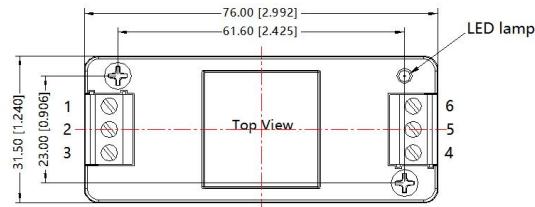

Pin-Out						
Pin	1	2	3	4	5	6
Single	Ctrl	GND	Vin	+Vo	NC	0V
Dual	Ctrl	GND	Vin	+Vo	0V	-Vo

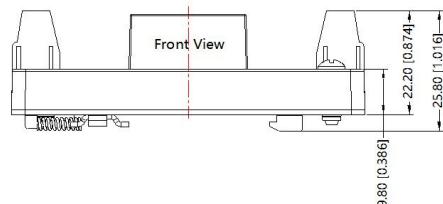

Note:

Unit: mm[inch]

Mounting rail: TS35

Wire range: 24-12 AWG

Tightening torque: Max 0.4 N·m

General tolerances: ±1.00[±0.039]

Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58210003 (DIP); 58220022(A2S/A4S package);
- If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet;
- The maximum capacitive load offered were tested at input voltage range and full load;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
- All index testing methods in this datasheet are based on company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

**Mornsun Guangzhou Science & Technology Co., Ltd.**

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: [info@mornsun.cn](mailto:info@mornsun.cn) [www.mornsun-power.com](http://www.mornsun-power.com)