
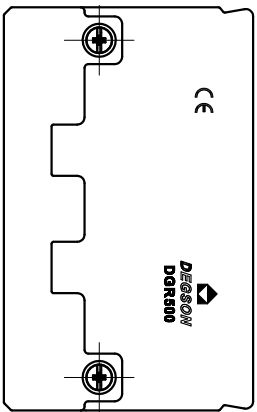
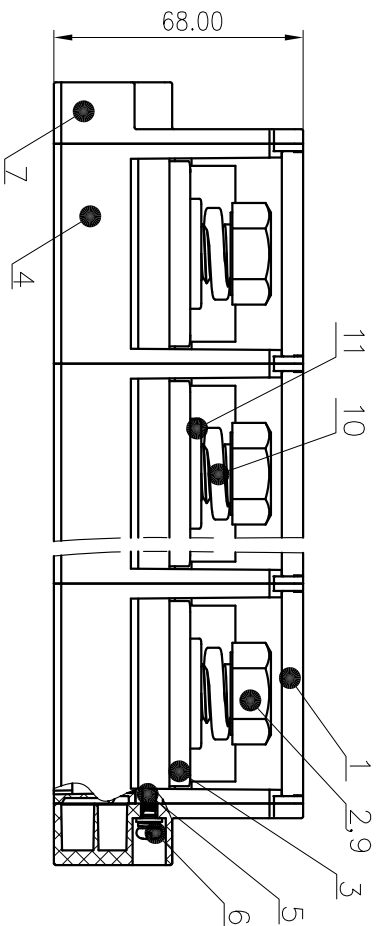


(W/O COVER)

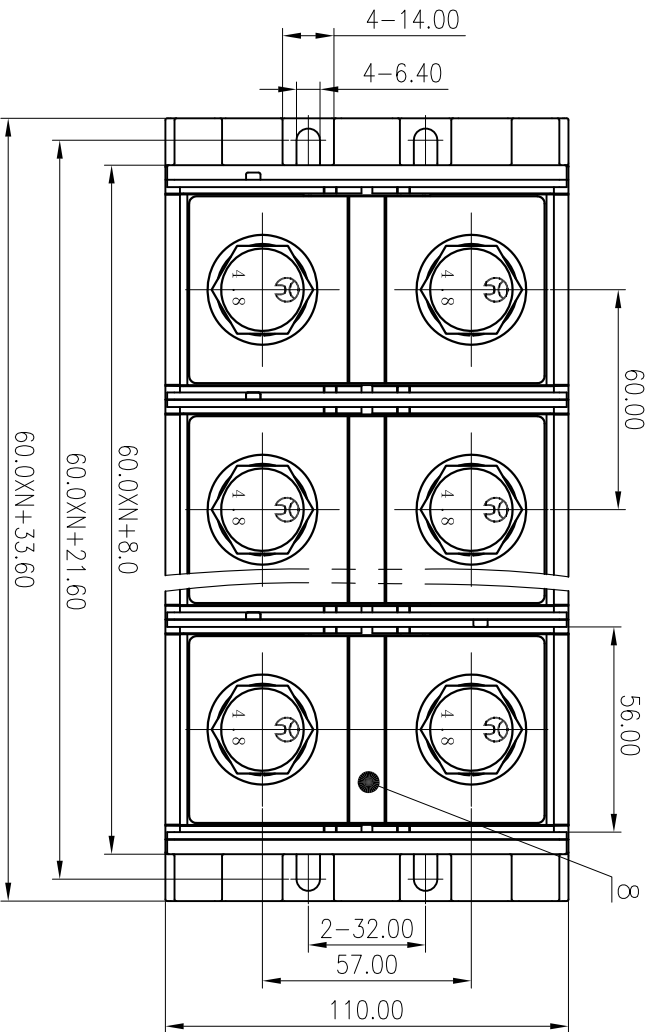

Pitch Range	In mm		Nominal Dimension		Range In mm		Over
	Over	Under	Over	Under	Over	Under	
6	10	10	24	30	60	100	150
TO	10	TO	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

11	Flat washer	Steel	Zn Plated
10	Spring washer	Steel	UL94V-0
9	Nut	Steel	M16/Zn Plated
8	Tag	PVC	UL94V-0
7	Housing2	PC	UL94V-0
6	Screws2	Steel	M4/Zn Plated
5	Connect pillar	Steel	Zn Plated
4	Housing1	PC	UL94V-0
3	Current carrier	Copper alloy	Ni Plated
2	Screws1	Steel	M16/Zn Plated
1	Transparent cover	PC	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/Rated Voltage(V)		600/50	600/50
额定电流/Rated Current(A)		0	0
螺栓扭矩/Torque Tightening(N·m/Lb·in)		M16, 24.0/213.00	300~750Kcmil
线径范围/Wire Range(Kcmil)		60.00/N=01~16P	
间距/Pitch(mm)/线数范围/Poles			
使用温度范围/Operating temperature(°C)			-40~+125
符合RoHS/符合RoHS/Conform to RoHS			Yes

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司
 NAME: DGR500-XXP-1Y-00A(H)

REV	ECN	DESCRIPTION	DRFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:2	REV	TO
1					mm inch			TO	1/1