

◆ Features

Operating with general temperature range $-40\sim+85^{\circ}\text{C}$

Load life of 2000 hours

RoHS & REACH compliant, Halogen-free



◆ Specifications

Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Load life: 2000hours

Voltage: 4 ~ 450V DC


Capacitance: 0.1 ~ 10000uF

Tolerance: $\pm 20\%$ at 120Hz, 20°C


Size: 4x5.4, 5x5.4, 6.3x5.4, 6.3x7.7, 8x10.5, 10x10.5, 10x13.5,
12.5x13.5, 12.5x16, 16x16.5, 18x16.5, 18x18.5

◆ Drawing of HCS Series

($\varnothing 4\sim\varnothing 6.3\times 7.7$) Unit: mm

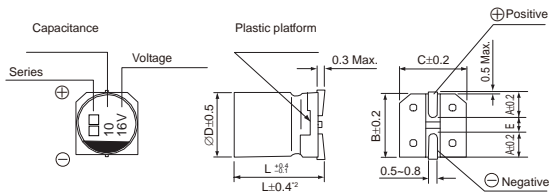

($\varnothing 8\times 10.5\sim\varnothing 18$) Unit: mm

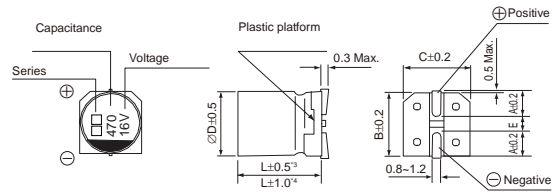

1. Voltage mark for 6.3V is [6V]

2. Applicable to $\varnothing 6.3\times 7.7$

3. Applicable to $\varnothing 8\times 10.5\sim\varnothing 10$

4. Applicable to $\varnothing 12.5\sim\varnothing 18$