

◆ Features

Operating with wide temperature range -40~+105°C

Load life of 2000 hours

RoHS & REACH compliant, Halogen-free



◆ Specifications

Temperature: -40°C ~ +105°C

Load life: 2000 hrs.

Voltage: 4 ~ 450V DC


Capacitance: 0.1~ 8200uF

Tolerance: ±20% at 120Hz, 20°C


Size: 4x5.4, 5x5.4, 6.3x5.4, 6.3x7.7, 8x10.5, 10x10.5, 10x13.5,
12.5x13.5, 12.5x16, 16x16.5, 18x16.5, 18x18.5

◆ Drawing of HCK Series

($\varnothing 4\text{--}\varnothing 6.3 \times 7.7$) Unit: mm

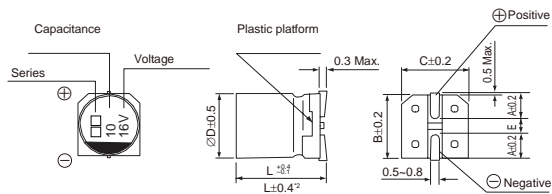

($\varnothing 8 \times 10.5\text{--}\varnothing 18$) Unit: mm

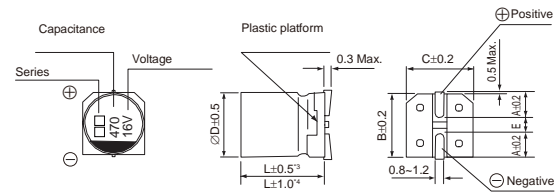

1. Voltage mark for 6.3V is [6V]
2. Applicable to $\varnothing 6.3 \times 7.7$
3. Applicable to $\varnothing 8 \times 10.5\text{--}\varnothing 10$
4. Applicable to $\varnothing 12.5\text{--}\varnothing 18$