
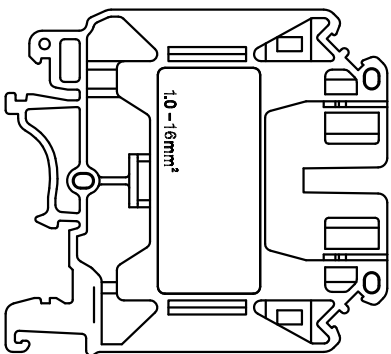

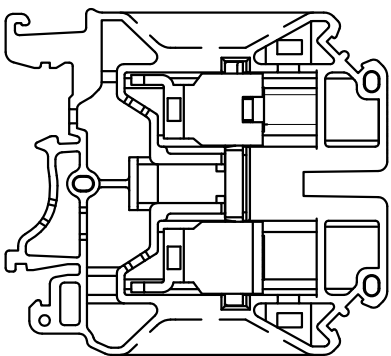


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
标注公差/General tolerances(mm) ±0.12/±0.18/±0.22/±0.26/±0.31/±0.37/±0.57/±0.80/±0.93/±1.05/±1.15/±1.60/±2.20/±2.50													



2	Screw	Steel	M5/Zn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	600/85	/	/
EC 标准/EC Standard:	/	/	/
过压类别/Overvoltage Category/污染等级/ Pollution Degree	III/3	/	/
额定电压/电涌/Rated Voltage(V)/Current(A)	1000/75	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M5: 3.0/27.0	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	1.0~16/16~4	/	/
间距/Pitch(mm)	12.20	/	/
剥线长度/Stripping length(mm)	13-14	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合RoHS环保要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL: SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /
 DRAFT: XMY 2014.10.15
 DRAWING NO.: PC16-C14
 NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD
 PC16-01P-1Y-105A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET 1/1
-----	-----	-------------	-------	------	----------	------------------------	------------	-----------

1 2 3 4 5 6