


GNSS+LTE MIMO+WIFI MIMO×3 Antenna

JCE605LMWM3



DIMENSIONS

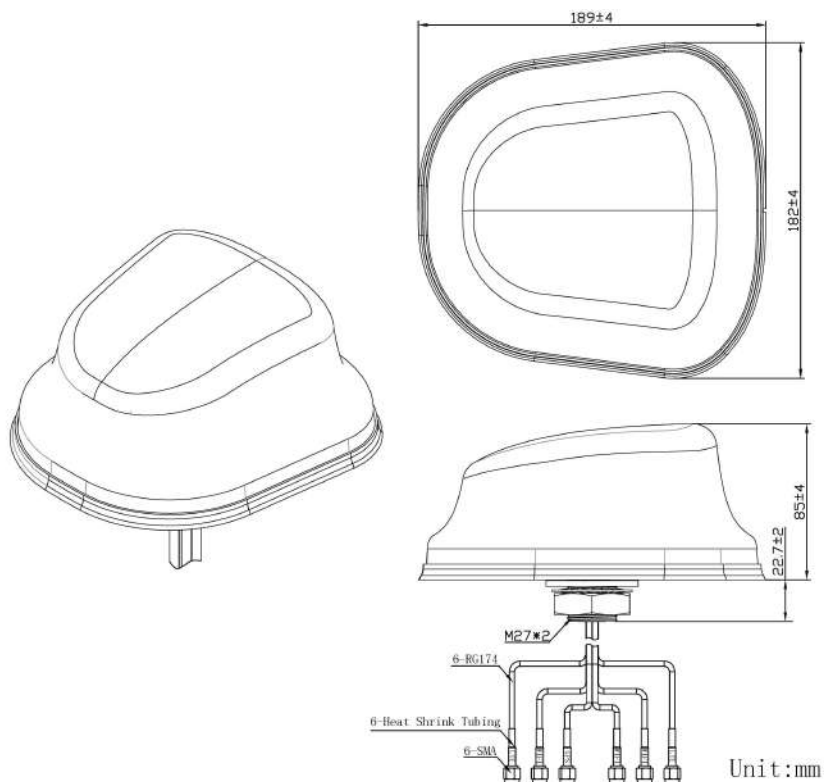

SPECIFICATIONS

Item		Specifications
GNSS Antenna	Frequency Range	1561.098~1606MHz
	Polarization	RHCP
	Impedance	50 Ω
	Dimension	25*25*4mm
	Gain	28 $\pm$ 2dB
	Noise Figure	$\leq$ 1.5dB
	Supply Voltage	3~5V DC
	Current Consumption	<15mA
	V.S.W.R	<2.0
LTE Antenna MIMO	Frequency Range	698~960MHz/1710~2690MHz/2900~3800MHz
	V.S.W.R	<3.0
	Polarization	Linear
	Gain	4dBi (Typ.)
	Impedance	50 Ω
WIFI Antenna MIMO*3	Frequency Range	2400~2483.5MHz/4900~5925MHz
	V.S.W.R	<2.5
	Polarization	Linear
	Gain	4dBi (Typ.)
	Impedance	50 Ω
Mechanical	Cable	RG174*6
	Connector	SMA or others
	Material	PC/ABS
	Mounting Method	Screw
Environmental	Operating Temperature	-40 $^{\circ}$ C~+85 $^{\circ}$ C
	Relative Humidity	Up to 95%
	Ingress Protection	IP67 (exclude cable outlet)
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant