


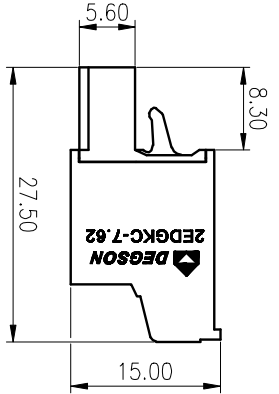


公差等级/General Tolerances(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12/±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2

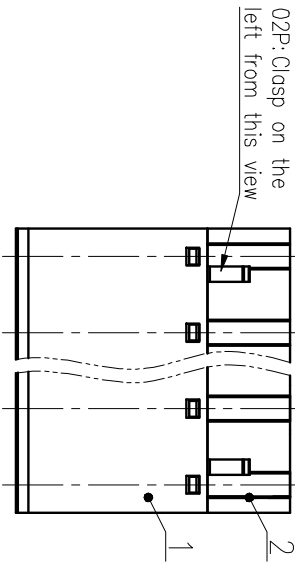

ITEM	NAME OF PART	MATERIAL	NOTES
6	Screw	Steel	M2.5/Zn Plated
5	Cage	Steel	M2.5/Zn Plated
4	Block	Steel	Zn Plated
3	Clamp	Copper alloy	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/10	150/710	300/710
IEC 标准/IEC Standard:	过压类别/Overvoltage Category/污染等		
数/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	/	400/20	/
额定脉冲电压(KV)/Rote Impulse Voltage(KV)	/	4	/
额定扭矩/Torque Tightening(N·m/Lbin)	M2.5, 0.4	3.54	/
导线范围(硬导线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~2.5/28~12		
间距/Pitch(mm)/导线范围/Poles	7.62/N=02~12P		
剥线长度/Stripping length(mm)	9-10		
工作温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: LonChH 2020.05.13  
 CHKD:GongYzh 2020.05.13  
 DFT: YrDK 2019.08.02

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**  
**2EDGKC-7.62-XXP-1Y-00A(H)**  
 DRAWING NO.: 2EDGKC-7.62-C01  
 TYPE: CUSTOMER DRAWING

SCALE: 1.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DFT	DATE

D  
C  
B  
A

1 2 3 4 5 6

D

B

A