


NOTES:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~22P
- 3.Operating temperature: -40°C~+105°C
- 4.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm					
	Over	Over	Over	Over	Over	Over
TO	6	10	TO	30	60	100
TO	10	TO	TO	60	TO	150
6	10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
					±1.30	±2

5.RoHS Compliance

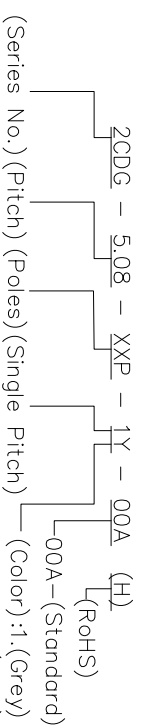

- (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PAG6	UL94V-0

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRFT: MJN 2018.04.13

SIZE: A4



TYPE: CUSTOMER DRAWING

SCALE: 1:1

SHEET

1/1

宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 2CDG-5.08-XXP-1Y-00A(H)

DRAWING NO.: 2CDG-5.08-C01

REV

TO

1/1

REV

ECN

DESCRIPTION

DRFT

DATE