
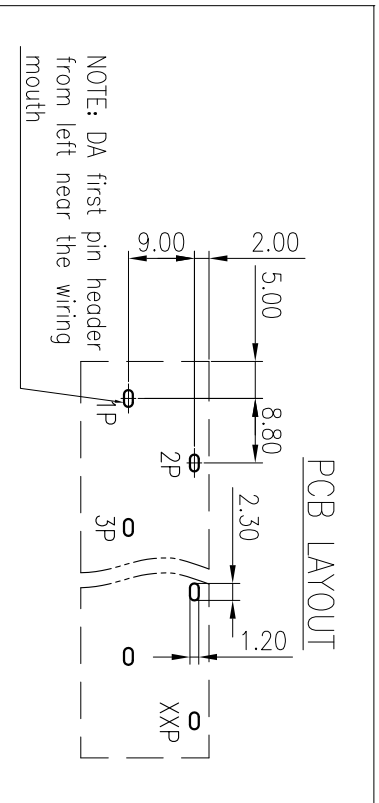
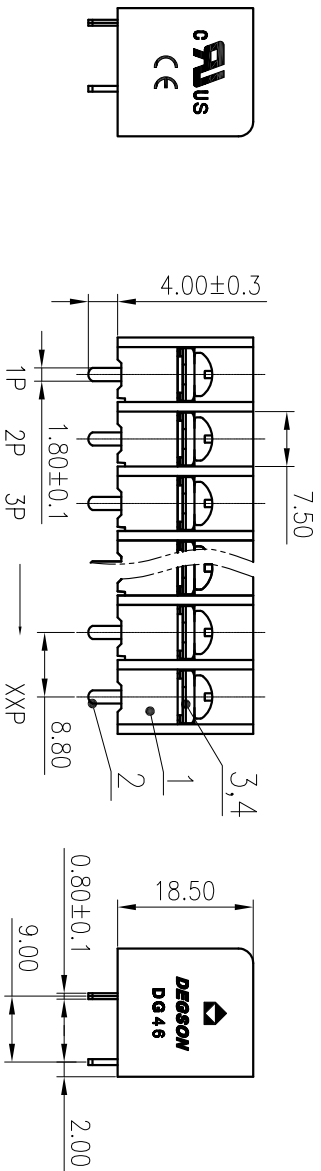


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>18	>50
~	~	~	~
3	6	30	50
~	10	~	~
~	18	~	~
~	30	~	~
~	50	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/1.0	0.1/1.0	0.1/1.0	0.1/1.0
±2	±2	±2	±2

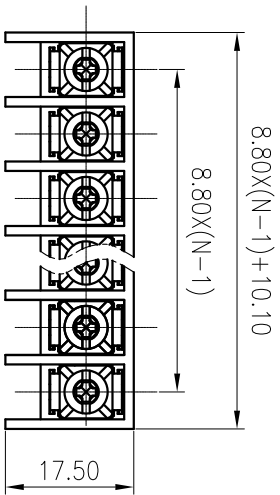

4	Pin Fastener	Steel	Ni Plated
3	Screw	Steel	M4/Ni Plated
2	Pin Header	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
UL 标准/UL Standard:		B	C
额定电压/电压/Rated Voltage(V)	600/20	600/20	600/5
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)	1000/32	1000/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	8	8
额定脉冲电流(N.m/Lb.in)	M3.5, 1.0/8.78		
额定扭矩/Torque Tightening(N.m/Lb.in)	0.2~4/22~12		
挠性范围(硬线和软线)/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)			
间距/Pitch(mm)/线数范围/Poles	8.8/N=02~24P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: LDD 07/23/15"

SIZE: A4

TYPE: CUSTOMER DRAWING

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG46-DA-XXP-1Y-00A(H)

DRAWING NO.: DG46-C33

SCALE: 1:1

REV TO

SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE