
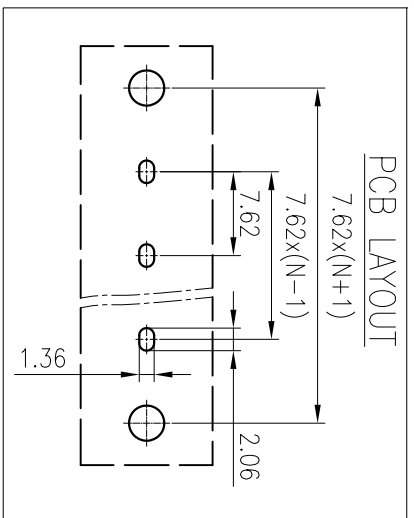
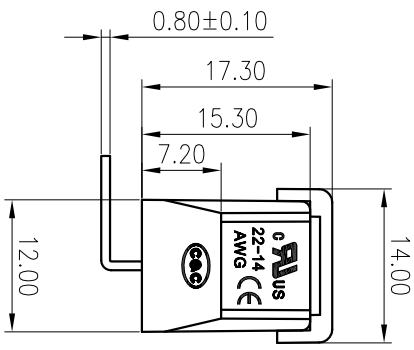
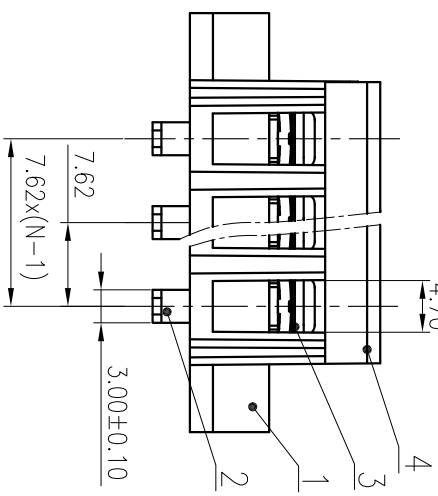



0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	±
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50													
未註公差/General Tolerances(mm)													

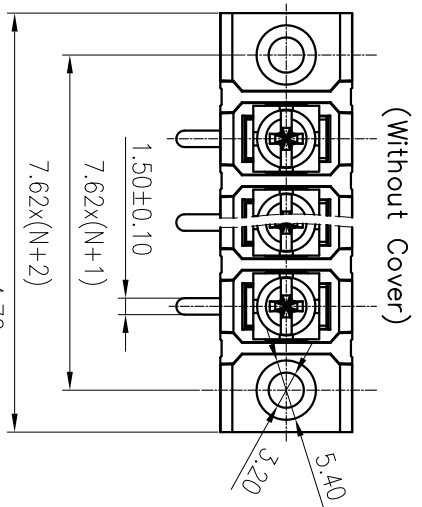

4	Cover	PC	UL 94V-2
3	Screw	Steel	M3/Ni Plated
2	Pin header	Copper alloy	M3/Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/电流/Rated Voltage(V)/Current(A) 300/15 / 300/10			
IEC 标准/IEC Standard: III/3 III/2 II/2			
过压类别/Overvoltage Category/污染等级/ Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A) 300/24 300/24 600/24			
额定脉冲电压/(KV)/Rate Impulse Voltage(KV) 5 5 5			
螺丝扭矩/Torque Tightening(N·m/Lb·in) M3, 0.5/4.43			
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG) 22~14			
间距/Pitch(mm)/线数范围/Poles 7.62/N=02~24P			
剥线长度/Stripping length(mm) 7			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRFT: CenMZ 2020.06.01

SIZE: A4

TYPE: CUSTOMER DRAWING

SCALE: 1.5:1 SHEET 1/1

NAME: **DEGSON** NINGBO DEGSON ELECTRICAL CO., LTD

DRG28R-A-XXP-1Y-00A(H)

DRAWING NO.: DG28R-C01

REV TO

REV 1/1

1 2 3 4 5 6

A

B

C

D