
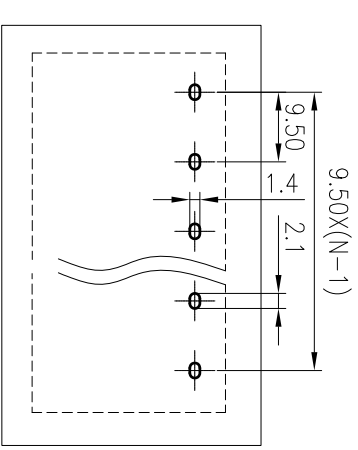


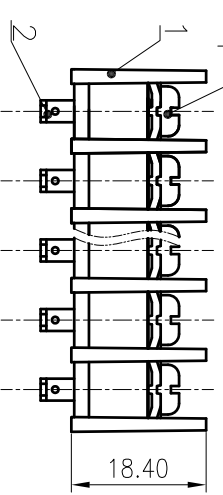
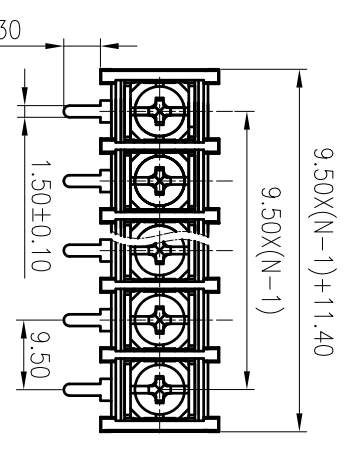


Pitch range in mm	Nominal dimension range					
	In mm		In mm			
6	over	10	over	30	over	100
10	to	10	to	60	to	150
15	to	24	to	100	to	150
25	to	24	to	60	to	100
±0.25	±0.25	±0.3	±0.5	±0.7	±1.0	±0.5/0.7

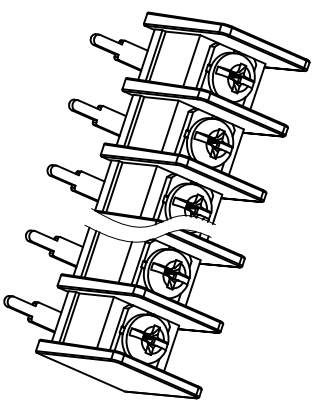

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0

UL Standard:	B	C	D
额定电压/Rated Voltage(V)	300/25	/	300/10
IEC 标准/IEC Standard:	300/25	/	300/10
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
级/ Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/32	600/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
额定脉冲电流(KV)/Rate Impulse Voltage(KV)	6	6	6
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53		
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.34~4/22~12		
可抽/Pitch(mm)/线数范围/Poles	9.50/N=02~26P		
剥线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: work
 APPD: /
 CHKD: /

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DG45R-C19
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

D C B A

D C B A

1 2 3 4 5 6