
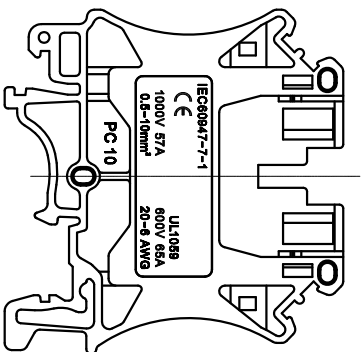

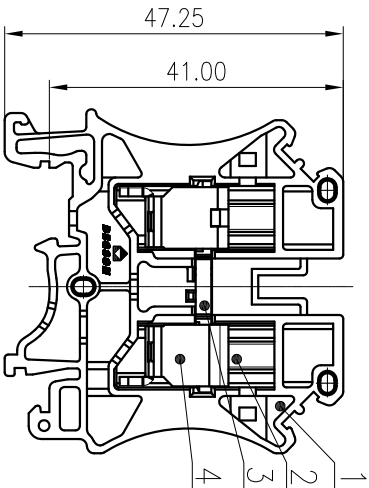


公差表/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±2

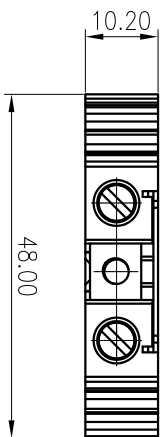

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cage	Steel	M4/Zn plated
3	Current carrier	Copper	
2	Screw	Steel	M4/Zn plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/Rated Voltage(V)	Current(A)	600/65	/	/
EC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等		III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)		1000/57	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8.0	/	/
额定扭矩/Torque Tightening(N·m/Lb·in)		M4, 1.2/10.53	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)		0.5~10/20-6	/	/
间距/Pitch(mm)		10.20	/	/
剥线长度/Stripping length(mm)		9-10	/	/
使用温度范围/Operating temperature(°C)		-40~+105	/	/
符合ROHS环保要求/Conform to ROHS		Yes	/	/
标准颜色编号/Standard color number:			/	/
PANTONE / RAL			/	/

MATERIAL: SURFACE:

MAT NO.: /
 STATUS: /
 APPD: /
 CHKD: /

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRFT: Apple 2014.09.11
 DRFT: PC10-C20
 TYPE: CUSTOMER DRAWING
 SCALE: 1:1
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
1				

1 2 3 4 5 6