


公差 (General Tolerances)(mm)		表面粗糙度 (Surface Roughness)
0	>3	0.1/10
~	>6	~
~	>10	~
~	>18	~
~	>30	~
~	>50	~
~	>80	~
~	>120	~
~	>180	~
~	>250	~
~	>315	~
~	>400	~
~	>500	~
±0.12	±0.18	±2
±0.22	±0.26	
±0.31	±0.37	
±0.57	±0.80	
±0.93	±1.05	
±1.15	±1.60	
±2.20	±2.50	

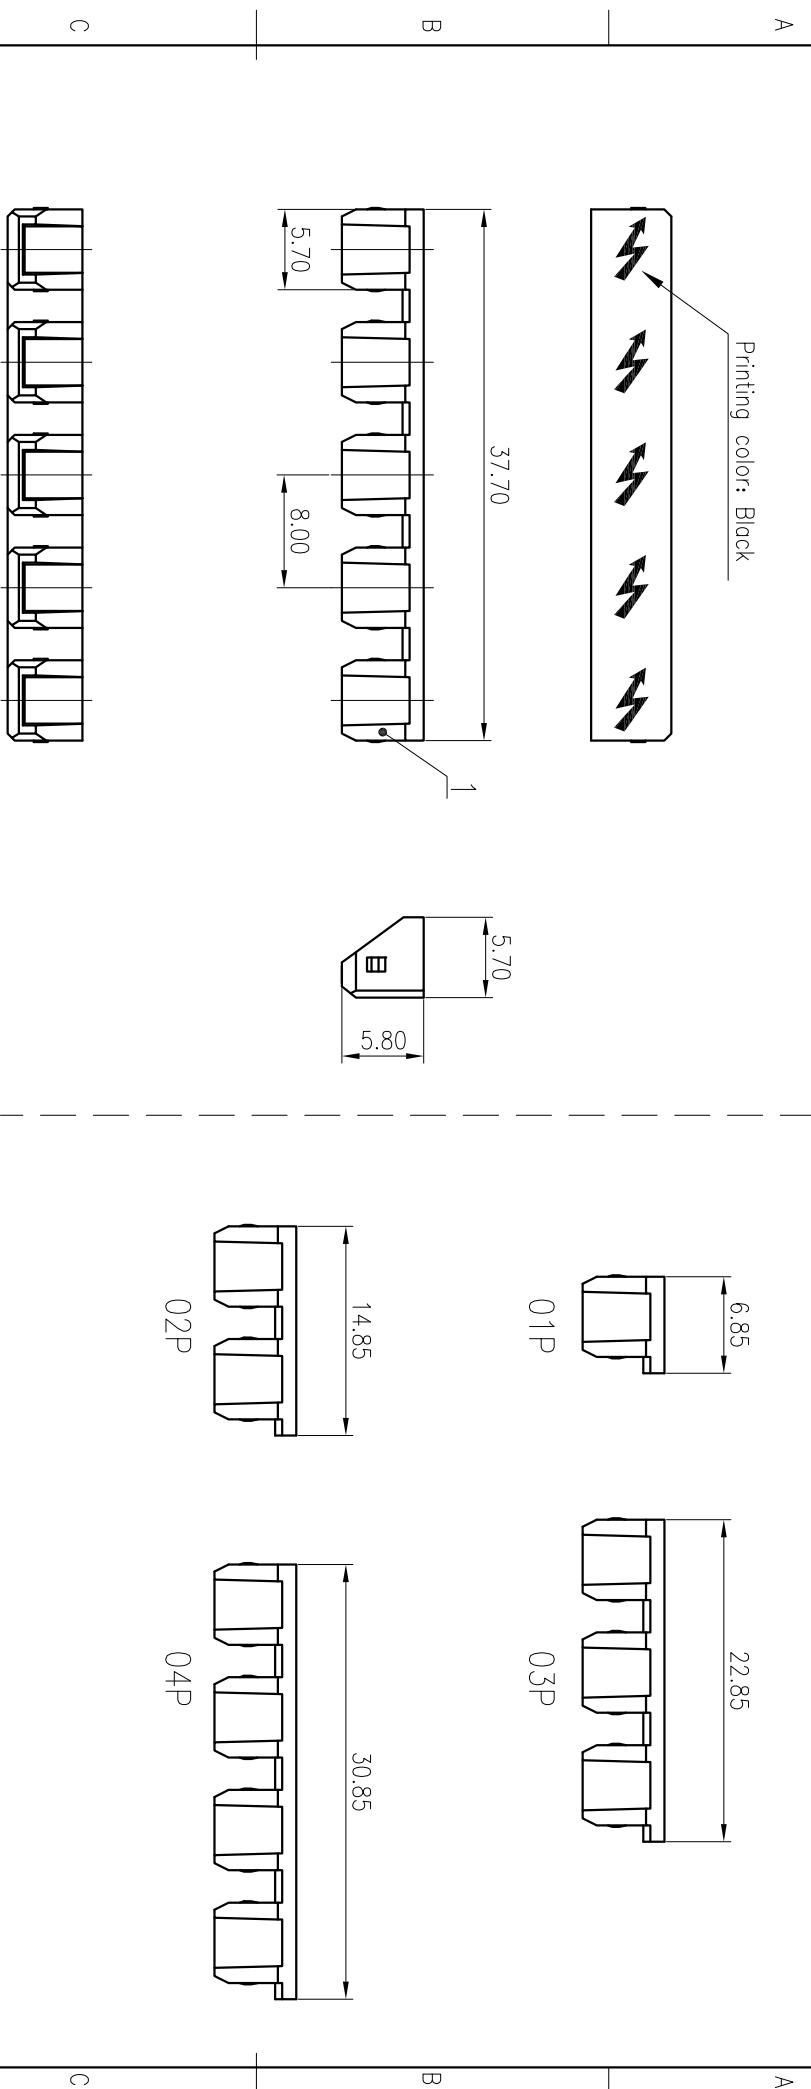

05P

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch(mm)/线数范围/Poles: 8.00/01~05P 使用温度范围/Operating temperature(°C): -40~+105 符合RoHS环保要求/Conform to RoHS: Yes			
MATERIAL: SURFACE:			

MAT NO.: /
 STATUS: /
DEGSON® 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: **EEA6-XXP-1Y-00A(H)**
 APPD: Li GL 2020.06.06
 CHKD: Mao J 2020.06.06
 DRTT: Feng X 2020.05.30

DRAWING NO.: EAA6-C01	REV: DD-1
TYPE: CUSTOMER DRAWING	SCALE: 2:1
SHEET: 1/2	

REV	ECN	DESCRIPTION	DRTT	DATE