

JODY-W1 series

Host-based multiradio modules with Wi-Fi and Bluetooth Data sheet



Abstract

This technical data sheet describes the JODY-W1 series modules with 2x2 MIMO 802.11n/ac and dual-mode Bluetooth® v4.2. JODY-W1 is ideal for in-vehicle-infotainment and telematics applications with simultaneous use cases requiring high data rates, such as in-car hotspots, Wi-Fi display applications such as Apple CarPlay, or video streaming across multiple clients. Connection to a host processor is through PCIe, SDIO, or High-Speed UART interfaces.

Document information

Title	JODY-W1 series	
Subtitle	Host-based multiradio modules with Wi-Fi and Bluetooth	
Document type	Data sheet	
Document number	UBX-16013635	
Revision and date	R20	28-May-2021
Disclosure restriction	C1-Public	

Product status	Corresponding content status	
Functional Sample	Draft	For functional testing. Revised and supplementary data will be published later.
In Development / Prototype	Objective Specification	Target values. Revised and supplementary data will be published later.
Engineering Sample	Advance Information	Data based on early testing. Revised and supplementary data will be published later.
Initial Production	Early Production Information	Data from product verification. Revised and supplementary data may be published later.
Mass Production / End of Life	Production Information	Document contains the final product specification.

This document applies to the following products:

Product name	Type number	Chipset	PCN reference	Product status
JODY-W163-A	JODY-W163-04A-11	CYW89359	N/A	Initial production
JODY-W163-A	JODY-W163-13A-11	CYW89359	N/A	Initial production
JODY-W164-A	JODY-W164-03A-11	CYW89359	N/A	Initial production
JODY-W164-A	JODY-W164-27A-11	CYW88359	N/A	Initial production
JODY-W164-A	JODY-W164-13A-11	CYW89359	N/A	Initial production
JODY-W164-A	JODY-W164-15A-11	CYW88359	N/A	Initial production
JODY-W167-A	JODY-W167-00A-11	CYW88359	N/A	Initial production
JODY-W167-A	JODY-W167-03A-11	CYW89359	N/A	Initial production

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, modification or disclosure to third parties of this document or any part thereof is only permitted with the express written permission of u-blox.

The information contained herein is provided "as is" and u-blox assumes no liability for its use. No warranty, either express or implied, is given, including but not limited to, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time without notice. For the most recent documents, visit www.u-blox.com.

Copyright © u-blox AG.

Contents

Document information	2
Contents	3
1 Functional description.....	5
1.1 Overview	5
1.2 Applications	5
1.3 Product features	6
1.4 Product description	7
1.5 Block diagrams	7
1.6 Product selection guidelines.....	9
1.7 Wi-Fi operation modes.....	9
1.7.1 RSDB single and multi-role operation modes	9
1.7.2 MIMO single and multi-role operation modes.....	10
1.8 Supported features	10
1.8.1 Wi-Fi Features.....	10
1.8.2 Bluetooth features	10
1.8.3 General product features	11
1.8.4 Compliance.....	11
1.8.5 Reserved MAC addresses	11
2 Interfaces	12
2.1 Host interface configuration	12
2.2 SDIO interface.....	12
2.2.1 Default speed and High speed modes.....	13
2.2.2 SDR12, SDR25, SDR50 Modes (up to 100 MHz) (1.8 V).....	14
2.2.3 SDR104 mode (208 MHz) (1.8 V)	14
2.2.4 DDR50 mode (50 MHz) (1.8 V)	15
2.3 PCI Express interface	16
2.4 High Speed UART interface	17
2.5 PCM Interface	18
2.5.1 PCM Interface specifications	19
2.6 I2S interface	23
2.6.1 I2S interface specifications.....	23
2.7 LTE coexistence interface.....	24
3 Pin definition.....	25
3.1 Pin description	25
4 Electrical specifications.....	28
4.1 Absolute maximum ratings	28
4.2 Operating conditions.....	28
4.3 Digital pad ratings.....	28
4.4 Wi-Fi power consumption	29
4.5 Bluetooth power consumption	30

4.6	Radio specifications	30
4.6.1	Bluetooth	30
4.6.2	Wi-Fi	30
4.7	LTE Coexistence performance	32
4.7.1	Wi-Fi receiver performance with LTE coexistence filter	32
4.7.2	Wi-Fi receiver performance with ordinary Wi-Fi Band pass filter	33
4.8	Module thermal information	34
5	Host drivers and firmware	35
5.1	General principle	35
5.2	Supported operating systems	35
5.2.1	Linux	35
6	Mechanical specifications	36
7	Approvals	37
7.1	Compliance with the RoHS directive	37
7.2	European Union regulatory compliance	37
7.3	FCC and IC compliance	37
7.3.1	FCC and ISED IDs	37
7.3.2	FCC compliance statement	38
7.3.3	ISED compliance statement	38
7.4	Approved antennas	40
7.4.1	Wi-Fi operation	40
7.4.2	Bluetooth operation	40
7.5	Bluetooth qualification	41
7.5.1	Bluetooth host stack	41
8	Product handling	42
8.1	Packaging	42
8.1.1	Reels	42
8.1.2	Tapes	42
8.2	Shipment, storage, and handling	43
8.2.1	Moisture sensitivity levels	43
8.2.2	Mounting process and soldering recommendations	43
8.2.3	ESD handling precautions	43
9	Labeling and ordering information	45
9.1	Product labeling	45
9.2	Product identifiers	46
9.3	Ordering information	46
	Appendix	47
A	Glossary	47
	Related documents	49
	Revision history	50
	Contact	52

1 Functional description

1.1 Overview

The JODY-W1 series is a compact module based on the Cypress CYW88359 and CYW89359 AEC-Q100 compliant chipsets. It enables Wi-Fi, Bluetooth®, and Bluetooth low energy communication, and is thus ideal for in-vehicle-infotainment and telematics applications with simultaneous use cases requiring high data rates, such as in-car hotspots, Wi-Fi display applications such as Apple CarPlay, or video streaming across multiple clients. The JODY-W1 modules can be operated in the following modes:

- Wi-Fi 2x2 MIMO 802.11n/ac in 2.4 GHz or 5 GHz
- Wi-Fi 1x1 802.11ac in 2.4 / 5 GHz real simultaneous dual band
- Dual-mode Bluetooth v4.2, including audio, can operate simultaneously with both Wi-Fi modes

The JODY-W1 undergoes extended automotive qualification according to ISO 16750-4 and is manufactured in line with ISO/TS 16949. Connection to a host processor is through PCIe, SDIO, or High-Speed UART interfaces.

1.2 Applications

Automotive applications

- In-car Access Point for internet access
- Usage of applications such as Apple CarPlay, Miracast etc., in the car
- Rear-seat display
- Rapid sync-n-go applications and fast content download to the vehicle
- Hands-free equipment (Bluetooth)

Industrial applications

- Manufacturing floor automation, wireless control terminals and point-to-point backhaul
- Machine control
- Medical in-hospital applications
- Security and surveillance
- Outdoor content distribution
- Robust wireless connectivity in a broad range of industrial applications

1.3 Product features

	JODY-W163	JODY-W164	JODY-W167
Grade			
Automotive	•	•	•
Professional			
Standard			
Radio			
Bluetooth qualification	v4.2		
Bluetooth profiles	HCI		
Bluetooth BR/EDR	•	•	•
Bluetooth low energy	•	•	•
Wi-Fi IEEE 802.11 standards	a/b/g/n/ac		
Wi-Fi 2.4 / 5 [GHz]	2.4 and 5		
LTE filter	o	o	o
Bluetooth output power conducted [dBm]	10	10	10
Wi-Fi output power conducted [dBm]	18	18	18
Antenna type	2p	2p	3p
OS support			
Android / Linux drivers (from u-blox)	•	•	•
QNX (via third party)	•	•	•
Interfaces			
High-speed UART ^B	1	1	1
PCIe ^W		1	1
SDIO [version]	v3 ^W		
PCM (Bluetooth audio)	1	1	1
Features			
Micro Access Point [max connects]	10	10	10
AES hardware support	•	•	•
Wi-Fi direct	•	•	•
Factory-assigned MAC address	•	•	•
Factory calibrated RF	•	•	•
Simultaneous STA/AP on different channels	•	•	•

B = For Bluetooth only

W = For Wi-Fi only

o = On request

2p = 2 antenna pins, one each for Bluetooth and Wi-Fi

3p = 3 pins, 2 for Wi-Fi and 1 for Bluetooth antenna

Table 1: Key features of JODY-W1 series

1.4 Product description

Model	Description
JODY-W163-A	Automotive grade module with 2 antenna pins, RSDB mode with a single antenna pin. Support for SDIO host interface only.
JODY-W164-A	Automotive grade module with 2 antenna pins, RSDB mode with a single antenna pin. Support for PCIe host interface, except JODY-W164-27A.
JODY-W167-A	Automotive grade module with 3 antenna pins, 2x2 MIMO

Table 2: Description of the module variants

1.5 Block diagrams

The block diagrams of the JODY-W1 series are provided in this section.

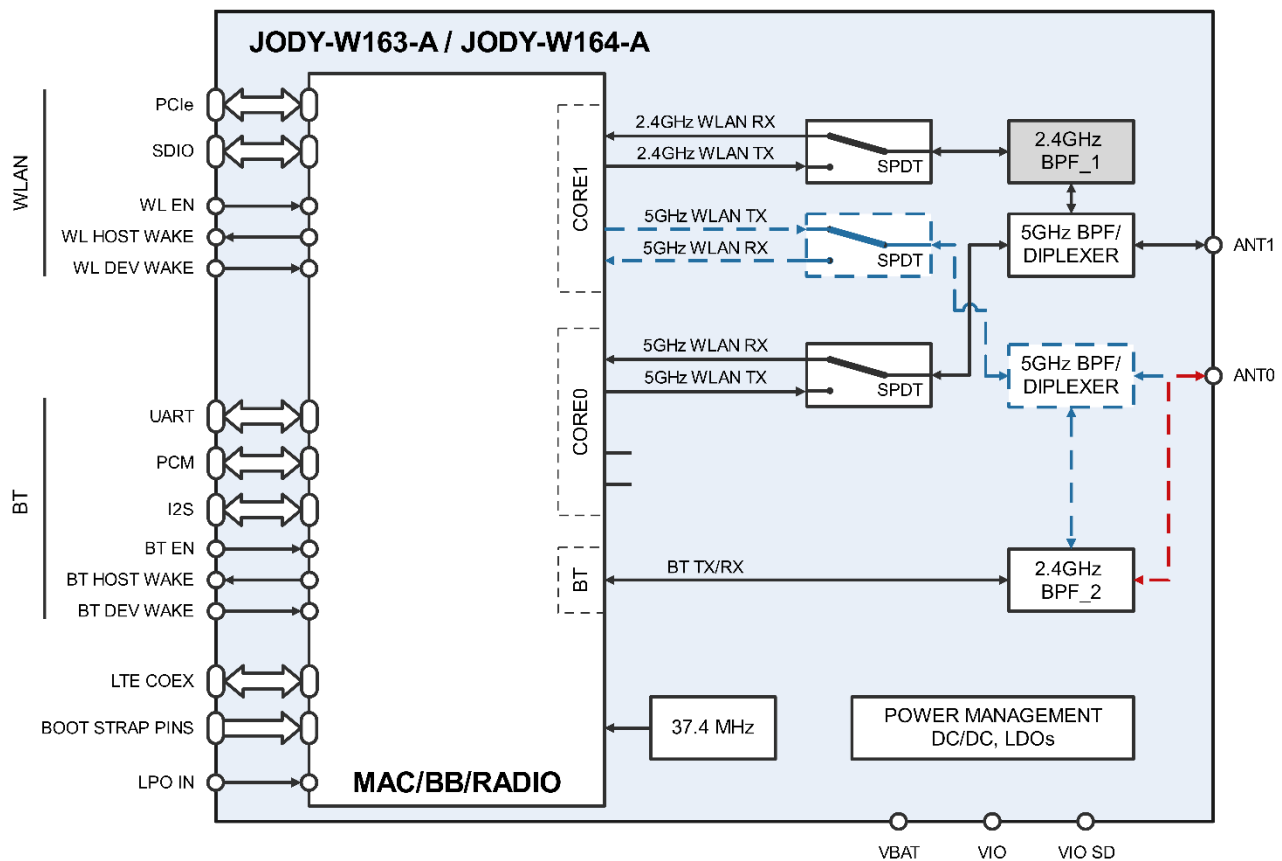


Figure 1: Block diagram of JODY-W163-A and JODY-W164-A

See Table 3 for available configurations and the corresponding ordering codes for JODY-W163-A and JODY-W164-A.

Ordering code	Antenna configuration		Band-pass filters	
	ANT0	ANT1	BPF_1	BPF_2
JODY-W164-03A	5 GHz Wi-Fi and Bluetooth	2.4 and 5 GHz Wi-Fi (RSDB operation supported)	Non-LTE coexistence	Non-LTE coexistence
JODY-W163-04A	Bluetooth	2.4 and 5 GHz Wi-Fi (RSDB operation supported)	Non-LTE coexistence	Non-LTE coexistence
JODY-W164-27A, JODY-W164-15A	Bluetooth	2.4 and 5 GHz Wi-Fi (RSDB operation supported)	LTE coexistence	Non-LTE coexistence
JODY-W163-13A, JODY-W164-13A	5 GHz Wi-Fi and Bluetooth	2.4 and 5 GHz Wi-Fi (RSDB operation supported)	LTE coexistence	Non-LTE coexistence

Table 3: Supported JODY-W164-A / JODY-W163-A configurations

- JODY-W163-A and JODY-W164-A differ only in the offered host interface (SDIO or PCIe). The host interface configuration is programmed at production time into the module.
- The LTE coexistence bandpass filter (BPF) is recommended when coexistence with the following LTE bands - 7, 38, 40 or 41 is implemented. See also [LTE Coexistence performance](#).

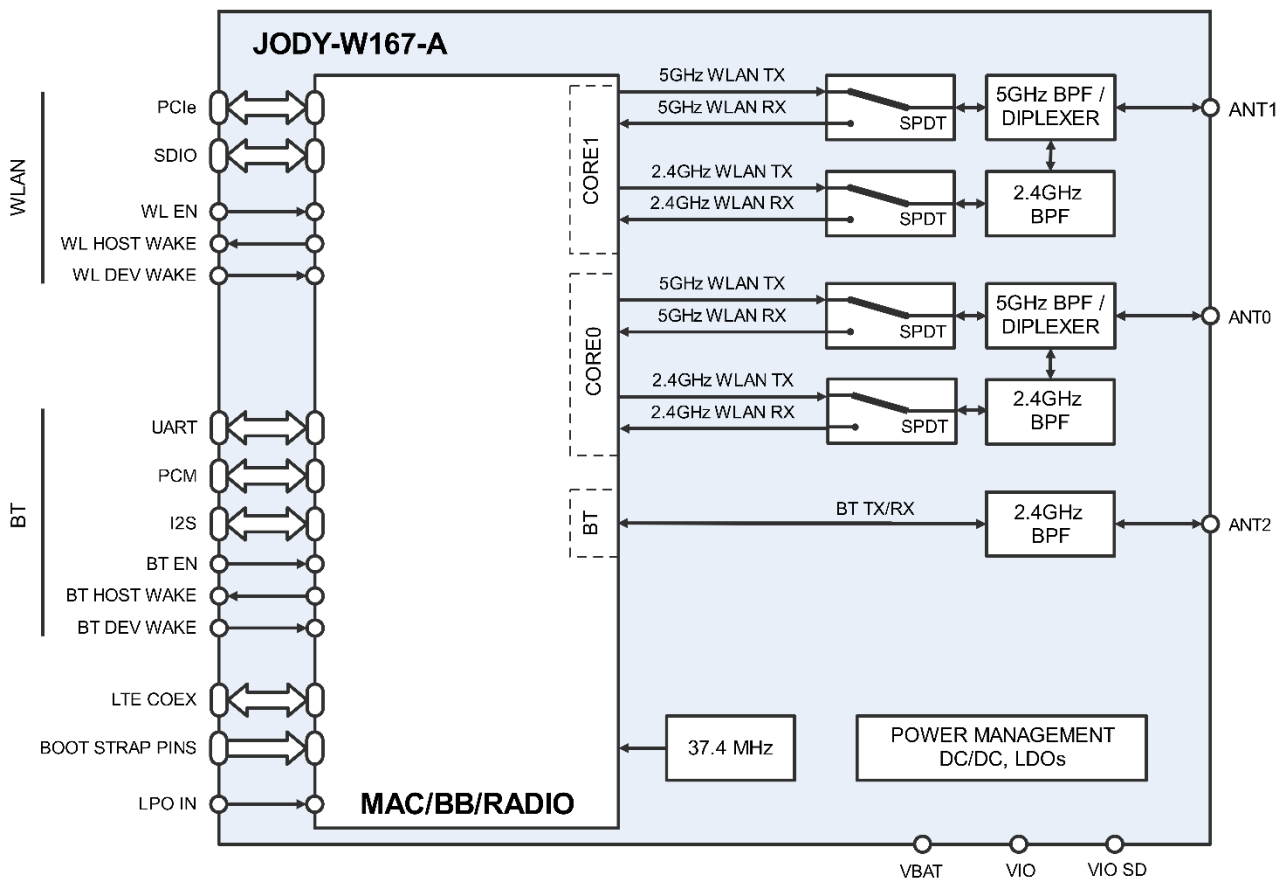


Figure 2: Block diagram of JODY-W167-A

1.6 Product selection guidelines

Wi-Fi antenna configuration	Chipset	Host interface	LTE filter	Ordering code
RSDB operation on single antenna	89359	PCIe	✓	-
			-	-
		SDIO	✓	-
	88359	PCIe	-	JODY-W163-04A
			✓	JODY-W164-15A
		SDIO	-	-
RSDB operation on single antenna, or 2x2 MIMO 5 GHz	89359	PCIe	✓	JODY-W164-13A
			-	JODY-W164-03A
		SDIO	✓	JODY-W163-13A
			-	-
2x2 MIMO 2.4 GHz, or 2x2 MIMO 5 GHz	89359	PCIe	-	JODY-W167-03A
	88359		-	JODY-W167-00A

Table 4: Selection guidelines for JODY-W1 series module variants

1.7 Wi-Fi operation modes

This section lists the Wi-Fi operation modes supported by the dual-MAC architecture of the JODY-W1 series modules. The modules support Wi-Fi operation on two fully concurrent 1x1 SISO channels in RSDB configuration, or on a single channel in 2x2 MIMO configuration. Dual-mode Bluetooth is supported concurrently to the Wi-Fi operation mode.

1.7.1 RSDB single and multi-role operation modes

2.4 GHz band	5 GHz band	Notes
AP	AP	Any channel
P2P (GO)	P2P (GO)	Any channel ¹
AP	STA	Any channel
STA	AP	Any channel
P2P (GO)	STA	Any channel ¹
STA	P2P (GO)	Any channel ¹
AP+STA	AP	Any channel. AP+STA on the same 2.4 GHz channel.
AP	AP+STA	Any channel. AP+STA on the same 5 GHz channel.
P2P (GO)	P2P (GO) + STA	Any channel. P2P (GO) + STA on the same 5 GHz channel ¹
P2P (GO) + STA	P2P (GO)	Any channel. P2P (GO) + STA on the same 2.4 GHz channel ¹

Table 5: Supported RSDB configurations

¹ Autonomous GO supported for P2P (GO)

1.7.2 MIMO single and multi-role operation modes

2.4 GHz band	5 GHz band	Notes
AP		Any channel
STA		Any channel
P2P (GO)		Any channel ¹
P2P (GC)		Any channel
AP+STA		Any channel. AP+STA on the same 2.4 GHz channel.
P2P (GO)+STA		Any channel. P2P (GO)+STA on the same 2.4 GHz channel.
P2P (GC)+STA		Any channel. P2P (GC)+STA on the same 2.4 GHz channel.
	AP	Any channel
	STA	Any channel
	P2P (GO)	Any channel ¹
	P2P (GC)	Any channel
	AP+STA	Any channel. AP+STA on the same 5 GHz channel.
	P2P (GO)+STA	Any channel. P2P (GO)+STA on the same 5 GHz channel.
	P2P (GC)+STA	Any channel. P2P (GC)+STA on the same 5 GHz channel.

Table 6: Supported MIMO configurations

 2.4 GHz and 5 GHz 2x2 MIMO are only supported on JODY-W167-A. Refer to Table 3 for the JODY-W163-A/JODY-W164-A variants supporting 5 GHz 2x2 MIMO.

1.8 Supported features

1.8.1 Wi-Fi Features

- Wi-Fi standards:
 - IEEE 802.11a/b/g/n/ac/e/i/v/w/h² in station and access point modes
 - IEEE 802.11d/u in station mode only
- Simultaneous client and access point operation (up to 10 clients supported in total)
- Supports Wi-Fi direct/P2P mode
- IEEE 802.11ac 2x2 antenna configuration
- IEEE 802.11 PHY data rates up to 866 Mbps
- WPA/WPA2 and WAPI STA encryption is supported by hardware
- WPA/WPA2 Enterprise 802.1X
- Wi-Fi channels:
 - 2.4 GHz: 1-13
 - 5 GHz: 36-165
- RSDB mode
- SU-MIMO configurations
- SDIO 3.0 or PCIe 3.0 (Gen1 speed) host interface for Wi-Fi, as described in Table 9.

1.8.2 Bluetooth features

- Bluetooth v4.2 with Bluetooth Low Energy and Classic Bluetooth v2.1+EDR over high-speed UART interface
- PCM/I2S interface for voice applications

² JODY-W1 has not been certified to operate as DFS master. DFS master operation is not supported in RSDB mode.

1.8.3 General product features

- Driver support for Linux 3.x/4.x
- Low-power and sleep modes for Bluetooth and Wi-Fi core
- Coexistence arbitration for Wi-Fi/Bluetooth/LE operation
- Variants with dedicated high-performance Wi-Fi/LTE coexistence filter available
- Small footprint (19.8 mm x 13.8 mm), LGA package
- Automotive qualification testing (climatic, mechanical, and operating life tests) in accordance with ISO 16750-4

1.8.4 Compliance

- RoHS compliant
- Radio type approvals for Europe, USA, and Canada



Additional country certifications on inquiry

1.8.5 Reserved MAC addresses

The JODY-W1 series has four unique consecutive MAC addresses reserved for each module. The first two addresses are stored in the configuration during production. The first MAC address is used for Bluetooth communication and the second MAC address is used as the primary address for Wi-Fi communication. The Data matrix code displayed on the product label includes the Bluetooth MAC address. The remaining two MAC addresses are not used in the manufacturing configuration but are reserved for use with the module. See also [Product labeling](#).

MAC address	Assignment	Last two bits of MAC address	Example
Module1, address 1	Bluetooth	0b00	<i>D4:CA:6E:44:00:04</i>
Module1, address 2	Wi-Fi	0b01	D4:CA:6E:44:00:05
Module1, address 3	(free for use)	0b10	D4:CA:6E:44:00:06
Module1, address 4	(free for use)	0b11	D4:CA:6E:44:00:07
Module2, address 1	Bluetooth	0b00	<i>D4:CA:6E:44:00:08</i>
Module2, address 2	Wi-Fi	0b01	D4:CA:6E:44:00:09
Module2, address 3	(free for use)	0b10	D4:CA:6E:44:00:0A
Module2, address 4	(free for use)	0b11	D4:CA:6E:44:00:0B

Table 7: MAC address assignment

2 Interfaces

2.1 Host interface configuration

JODY-W1 series module uses pins 6, 7, and 8 to accommodate the host interface configuration input that sets the desired operation after module reset. To configure these pins for a specific operational mode, the input must be connected to ground using pull-down 10 k Ω (or less) resistor. No external circuitry is required to set a configuration pin to high logical level.

Although external reset is not a prerequisite for correct operation, the host controller can reset the module through WL_EN / BT_EN (active high) to correct any abnormal module behavior.

Depending on the module variant, either SDIO or PCIe Wi-Fi host interface must be used:

PCIe enable Pin 6	SDIO disable Pin 7	SDIO VDD select Pin 8	VIO_SD supply Pin 4	Wi-Fi interface
1	1	1	3.3 V or 1.8 V	PCIe
0	0	1	1.8 V	SDIO 1.8 V
0	0	0	3.3 V	SDIO 3.3 V

Table 8: Module host interface configuration

 Depending on the variant, JODY-W1 series modules support either SDIO or PCIe host interfaces. The host interface configuration must be selected accordingly, as shown in Table 8. The following sections describe the electrical characteristics of the two host interfaces. An overview of the supported host interfaces for the different JODY-W1 variants is shown in Table 9.

Product name	Ordering code	Host interface
JODY-W163-A	JODY-W163-04A	SDIO
JODY-W163-A	JODY-W163-13A	SDIO
JODY-W164-A	JODY-W164-03A	PCIe
JODY-W164-A	JODY-W164-27A	SDIO
JODY-W164-A	JODY-W164-13A	PCIe
JODY-W164-A	JODY-W164-15A	PCIe
JODY-W167-A	JODY-W167-00A	PCIe
JODY-W167-A	JODY-W167-03A	PCIe

Table 9: Supported host interfaces per product

2.2 SDIO interface

The SDIO device interface conforms to the industry standard SDIO 3.0 specification that supports UHS-I bus speed up to 104 MByte/s. It allows host controllers to access the Wi-Fi functions of JODY-W1 series modules, using the SDIO bus protocol. The interface supports 4-bit SDIO transfer mode at the full clock range of 0 to 208 MHz.

2.2.1 Default speed and High speed modes

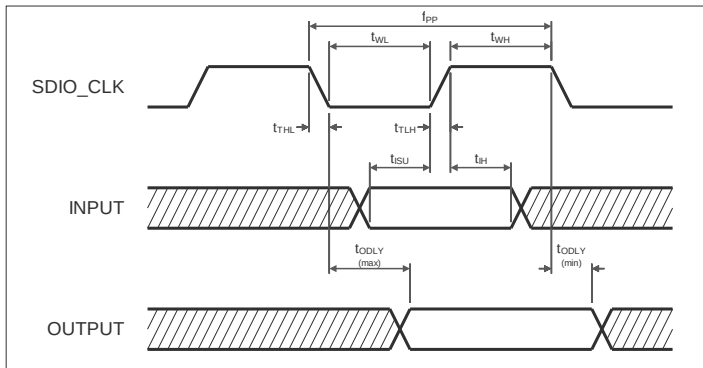


Figure 3: SDIO Protocol timing diagram- Default speed mode (3.3 V)

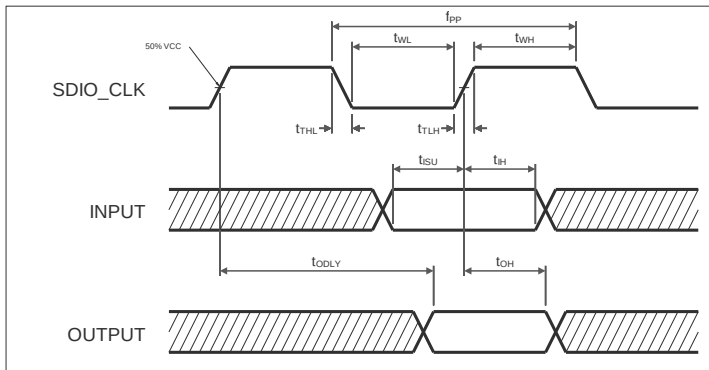


Figure 4: SDIO Protocol timing diagram – High speed mode (3.3 V)

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
f_{PP}	Clock frequency – Data Transfer Mode	Normal	0	-	25	MHz
		High speed	0	-	50	MHz
f_{OD}	Clock frequency – Identification Mode	Normal	0	-	400	kHz
		High speed	0	-	400	kHz
t_{WL}	Clock low time	Normal	10	-	-	ns
		High speed	7	-	-	ns
t_{WH}	Clock high time	Normal	10	-	-	ns
		High speed	7	-	-	ns
t_{TLH}	Clock rise time	Normal	-	-	10	ns
		High speed	-	-	3	ns
t_{THL}	Clock low time	Normal	-	-	10	ns
		High speed	-	-	3	ns
t_{ISU}	Input setup time	Normal	5	-	-	ns
		High speed	6	-	-	ns
t_{IH}	Input hold time	Normal	5	-	-	ns
		High speed	2	-	-	ns
t_{ODLY}	Output delay time – Data Transfer Mode	Normal	0	-	14	ns
		High speed	-	-	14	ns
t_{ODLY}	Identification Mode	Normal	0	-	50	ns
t_{ODLY}	Output delay time $CL \leq 40$ pF (1 card)	Normal	0	-	14	ns
t_{OH}	Output hold time	High speed	2.5	-	-	ns
CL	Total system capacitance (each line)	High speed	0	-	40	pF

Table 10: SDIO Timing data – Default speed, High speed modes (3.3 V)

2.2.2 SDR12, SDR25, SDR50 Modes (up to 100 MHz) (1.8 V)

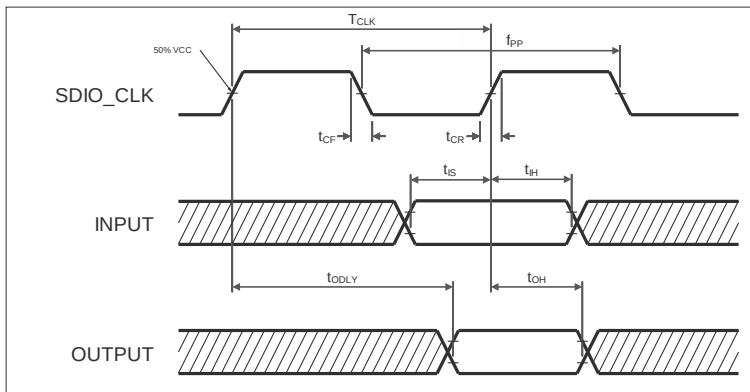


Figure 5: SDIO Protocol timing diagram – SDR12, SDR25, SDR50 modes (up to 100 MHz) (1.8 V)

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
f_{PP}	Clock frequency	SDR12	0	-	25	MHz
		SDR25	0	-	50	MHz
		SDR50	0	-	100	MHz
t_{IS}	Input setup time	SDR12/25/50	3	-	-	ns
t_{IH}	Input hold time	SDR12/25/50	0.8	-	-	ns
t_{CLK}	Clock time	SDR12/25/50	10	-	40	ns
-	Clock duty	SDR12/25/50	30	-	70	%
t_{CR}, t_{CF}	Rise time, fall time $T_{CR}, T_{CF} < 2$ ns (max) at 100 MHz $C_{CARD} = 10$ pF	SDR12/25/50	-	-	$0.2 \cdot T_{CLK}$	ns
t_{ODLY}	Output delay time $C_L \leq 30$ pF	SDR12/25	-	-	14	ns
		SDR50	-	-	7.5	
t_{OH}	Output hold time $C_L = 15$ pF	SDR12/25/50	1.5	-	-	ns

Table 11: SDIO Timing data – SDR12, SDR25, SDR50 modes (up to 100 MHz) (1.8 V)

2.2.3 SDR104 mode (208 MHz) (1.8 V)

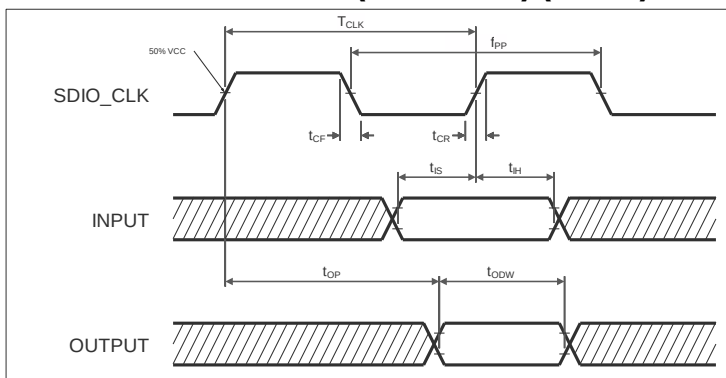


Figure 6: SDIO Protocol timing diagram – SDR104 mode (208 MHz)

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
f_{PP}	Clock frequency	SDR104	0	-	208	MHz
T_{IS}	Input setup time	SDR104	1.4	-	-	ns
T_{IH}	Input hold time	SDR104	0.8	-	-	ns

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
T_{CLK}	Clock time	SDR104	4.8	-	-	ns
t_{CR}, t_{CF}	Rise time, fall time $T_{CR}, T_{CF} < 0.96$ ns (max) at 208 MHz $C_{CARD} = 10$ pF	SDR104	-	-	$0.2 \cdot T_{CLK}$	ns
T_{OP}	Card output phase	SDR104	0	-	2	UI
dT_{OP}	Delay variation due to temperature change after tuning	SDR104	-350	-	+1550	ps
T_{ODW}	Output timing of variable data window	SDR104	0.6	-	-	UI

Table 12: SDIO Timing data – SDR104 mode (208 MHz)

2.2.4 DDR50 mode (50 MHz) (1.8 V)

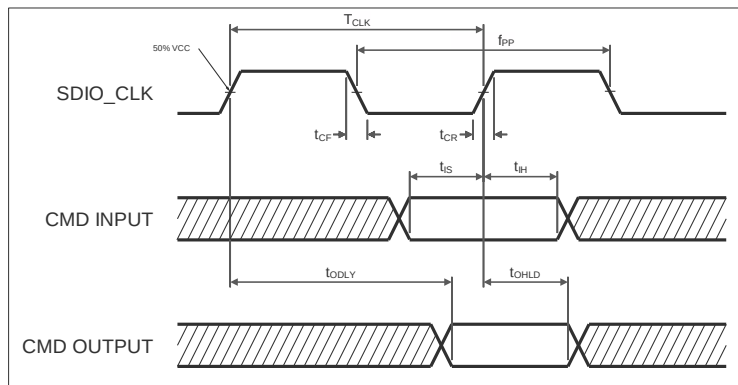


Figure 7: SDIO CMD Timing diagram – DDR50 mode (50 MHz)

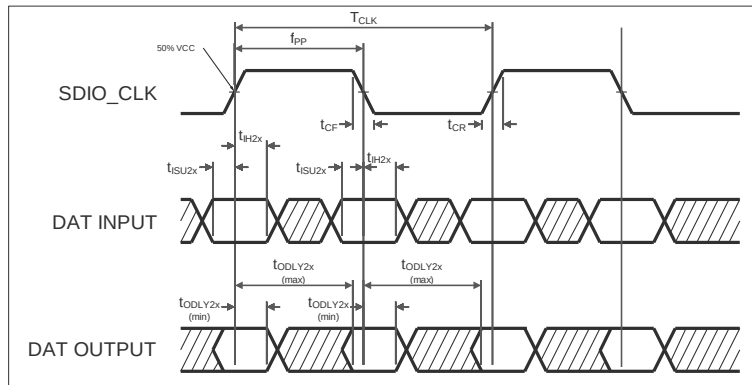


Figure 8: SDIO DAT[3:0] timing diagram – DDR50 mode (50 MHz)

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
Clock						
T_{CLK}	Clock time 50 MHz (max) between rising edges	DDR50	20	-	-	ns
t_{CR}, t_{CF}	Rise time, fall time $T_{CR}, T_{CF} < 4.00$ ns (max) at 50 MHz $C_{CARD} = 10$ pF	DDR50	-	-	$0.2 \cdot T_{CLK}$	ns
Clock Duty		DDR50	45	-	55	%
CMD Input (referenced to clock rising edge)						
t_{IS}	Input setup time $C_{CARD} \leq 10$ pF (1 card)	DDR50	6	-	-	ns
t_{IH}	Input hold time $C_{CARD} \leq 10$ pF (1 card)	DDR50	0.8	-	-	ns
CMD Output (referenced to clock rising edge)						

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
t_{ODLY}	Output delay time during data transfer mode $C_L \leq 30$ pF (1 card)	DDR50	-	-	13.7	ns
t_{OHLd}	Output hold time $C_L \geq 15$ pF (1 card)	DDR50	1.5	-	-	ns
DAT[3:0] Input (referenced to clock rising and falling edges)						
t_{IS2x}	Input setup time $C_{CARD} \leq 10$ pF (1 card)	DDR50	3			ns
t_{IH2x}	Input hold time $C_{CARD} \leq 10$ pF (1 card)	DDR50	0.8			ns
DAT[3:0] Output (referenced to clock rising and falling edges)						
$t_{ODLY2x (max)}$	Output delay time during data transfer mode $C_L \leq 25$ pF (1 card)	DDR50			7.5	ns
$t_{ODLY2x (min)}$	Output hold time $C_L \geq 15$ pF (1 card)	DDR50	1.5			ns

Table 13: SDIO Timing data – DDR50 mode (50 MHz)

2.3 PCI Express interface

The PCI Express interface complies with the PCIe v3.0 standard at Gen1 speed and allows a host controller using the PCIe bus protocol to access Wi-Fi functionality of the JODY-W1 series modules. The following table shows the parameters for the PCI Express interface.

Parameter	Symbol	Comments	Min.	Typ	Max.	Units
General						
Baud rate	BPS	-	-	2.5	-	Gbaud
Reference clock amplitude	Vref	LVPECL, AC coupled	1	-	-	V
Receiver						
Differential termination	ZRX-DIFF-DC	Differential termination	80	100	120	Ω
DC impedance	ZRX-DC	DC common-mode impedance	40	50	60	Ω
Power down termination (POS)	ZRX-HIGH-IMP-DC-POS	Power-down or RESET high impedance	100k	-	-	Ω
Power down termination (NEG)	ZRX-HIGH-IMP-DC-NEG	Power-down or RESET high impedance	1k	-	-	Ω
Input voltage	VRX-DIFFp-p	AC coupled, differential p-p	175	-	-	mV
Jitter tolerance	TRX-EYE	Minimum receiver eye width	0.4	-	-	UI
Differential return loss	RLRX-DIFF	Differential return loss	10	-	-	dB
Common-mode return loss	RLRX-CM	Common-mode return loss	6	-	-	dB
Unexpected electrical idle enter detect threshold integration time	TRX-IDEL-DET-DIFF-ENTERTIME	An unexpected electrical idle must be recognized no longer than this time to signal an unexpected idle condition	-	-	10	ms
Signal detect threshold	VRX-IDLE-DET-DIFFp-p	Electrical idle detect threshold	65	-	175	mV
Transmitter						
Output voltage	VTX-DIFFp-p	Differential p-p, programmable in 16 steps	0.8	-	1200	mV
Output voltage rise time	VTX-RISE	20% to 80%	0.125 (2.5 GT/s) 0.15 (5 GT/s)	-	-	UI
Output voltage fall time	VTX-FALL	80% to 20%	0.125	-	-	UI

Parameter	Symbol	Comments	Min.	Typ	Max.	Units
			(2.5 GT/s) 0.15 (5 GT/s)	-	-	
RX detection voltage swing	VTX-RCV-DETECT	The amount of voltage change allowed during receiver detection	-	-	600	mV
TX AC peak common-mode voltage (5 GT/s)	VTX-CM-AC-PP	TX AC common mode voltage (2.5 GT/s)	-	-	100	mV
TX AC peak common-mode voltage (2.5 GT/s)	VTX-CM-AC-P	TX AC common mode voltage (5 GT/s)	-	-	20	mV
Absolute delta of DC common-mode voltage during L0 and electrical idle	VTX-CM-DC-ACTIVE-IDLE-DELTA	Absolute delta of DC common-mode voltage during L0 and electrical idle	0	-	100	mV
Absolute delta of DC common-mode voltage between D+ and D-	VTX-CM-DC-LINE-DELTA	DC offset between D+ and D-	0	-	25	mV
Electrical idle differential peak output voltage	VTX-IDLE-DIFF-AC-p	Peak-to-peak voltage	0	-	20	mV
TX short circuit current	ITX-SHORT	Current limit when TX output is shorted to ground	-	-	90	mA
DC differential TX termination	ZTX-DIFF-DC	Low impedance defined during signaling (parameter is captured for 5.0 GHz by RLTX-DIFF)	80	-	120	Ω
Differential return loss	RLTX-DIFF	Differential return loss	10 (min) for 0.05: 1.25 GHz	-	-	dB
Common-mode return loss	RLTX-CM	Common-mode return loss	6	-	-	dB
TX eye width	TTX-EYE	Minimum TX eye width	0.75	-	-	UI

Table 14: PCI Express interface parameters

2.4 High Speed UART interface

The JODY-W1 series modules support a high speed Universal Asynchronous Receiver/Transmitter (UART) interface in compliance with the industry standard 16550 specification. The main features of the UART interface are:

- 1040-bytes receive and transmit FIFO
- Automatic baud rate detection
- Supports Bluetooth 4.2 HCI specification
- 2 pins for transmit and receive operations
- 2 flow control pins
- Interrupt triggers for low-power, high throughput operation
- High throughput (4 Mbps)

Baud Rate				
9600	115200 (default)	1000000	2100000	4000000
19200	230400	1382400	2764800	
38400	460800	1500000	3000000	
57600	500000	1843200	3250000	
76800	921600	2000000	3692300	

Table 15: Supported UART Baud rates

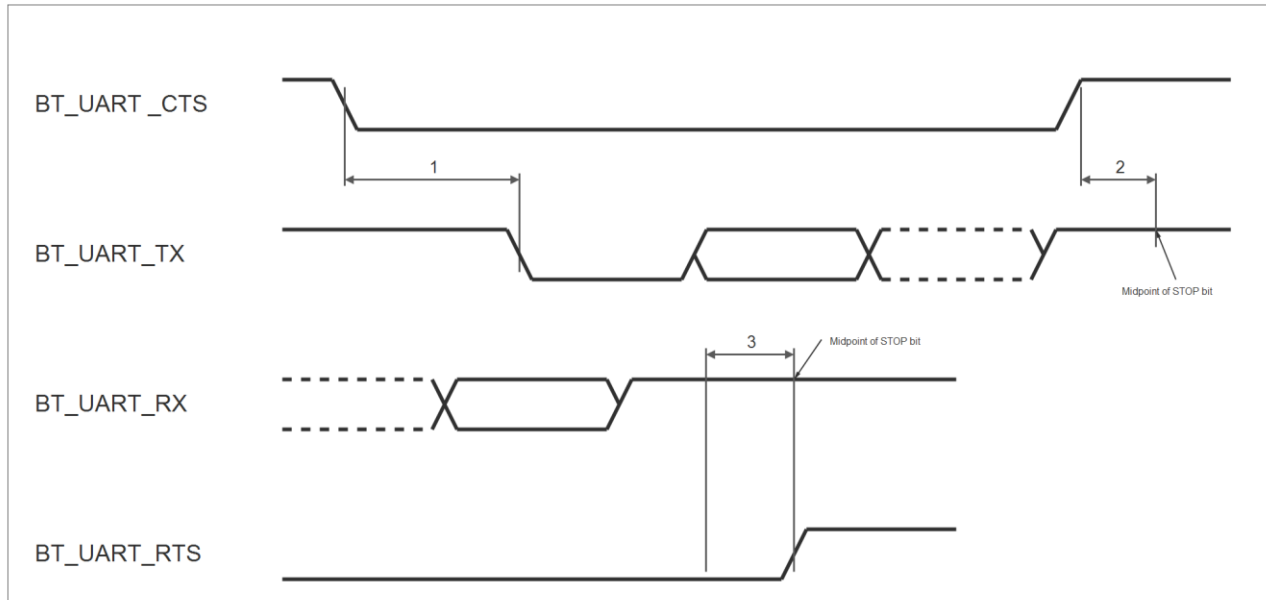


Figure 9: UART Timing

Reference	Characteristic	Min.	Typ	Max.	Units
1	Delay time, BT_UART_CTS low to BT_UART_TX valid	-	-	1.5	Bit period
2	Setup time, BT_UART_CTS high before midpoint of stop bit	-	-	0.5	Bit period
3	Delay time, midpoint of stop bit to BT_UART_RTS high	-	-	0.5	Bit period

Table 16: UART Timing Specification

2.5 PCM Interface

The JODY-W1 series modules support a Pulse Code Modulation (PCM) interface that provides the following:

- Master or slave mode
- PCM bit width size of 8 bits or 16 bits
- Up to 16 slots with configurable bit width and start positions
- Short frame and long frame synchronization
- Burst PCM mode

The PCM pins of JODY-W1 series modules can be configured to either PCM or I²S interface through HCI commands. For pin mapping information, see also [I²S interface](#).

2.5.1 PCM Interface specifications

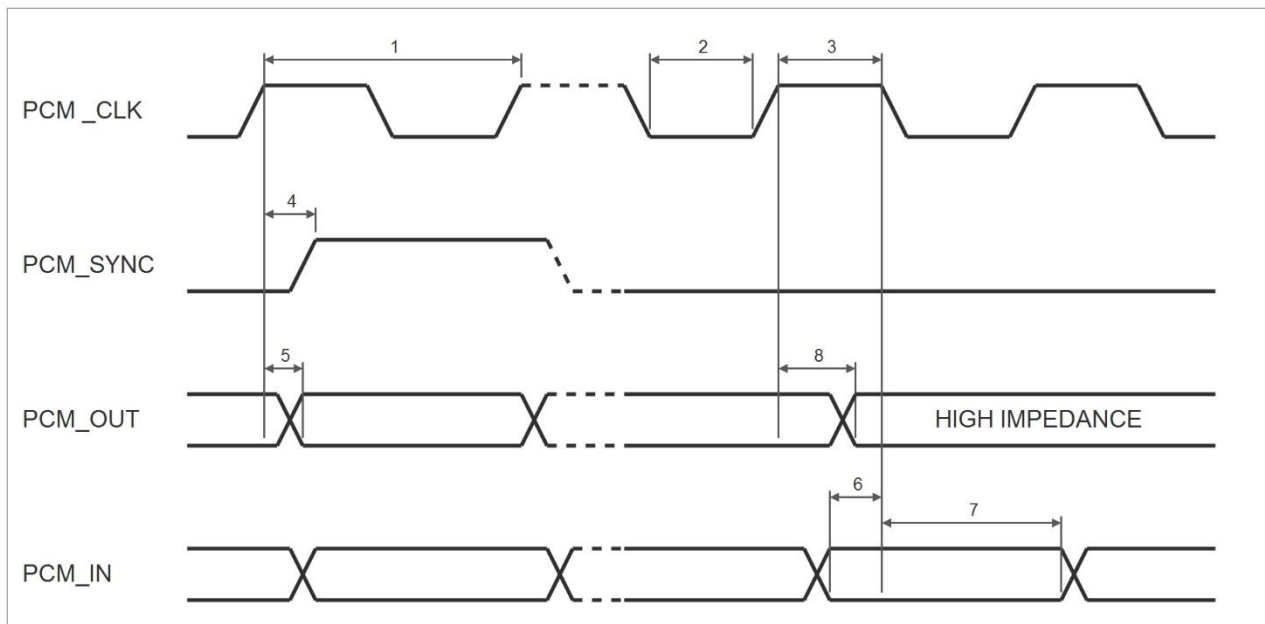


Figure 10: PCM Timing specification – Short Frame Sync., Master mode

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
1	PCM clock frequency	-	-	-	12	MHz
2	PCM bit clock LOW	-	41	-	-	ns
3	PCM bit clock HIGH	-	41	-	-	ns
4	PCM_SYNC delay	-	0	-	25	ns
5	PCM_OUT delay	-	0	-	25	ns
6	PCM_IN setup	-	8	-	-	ns
7	PCM_IN hold	-	8	-	-	ns
8	Delay from rising edge of PCM_CLK during last bit period to PCM_OUT becoming high impedance	-	0	-	25	ns

Table 17: PCM Timing specification – Short Frame Sync., Master mode

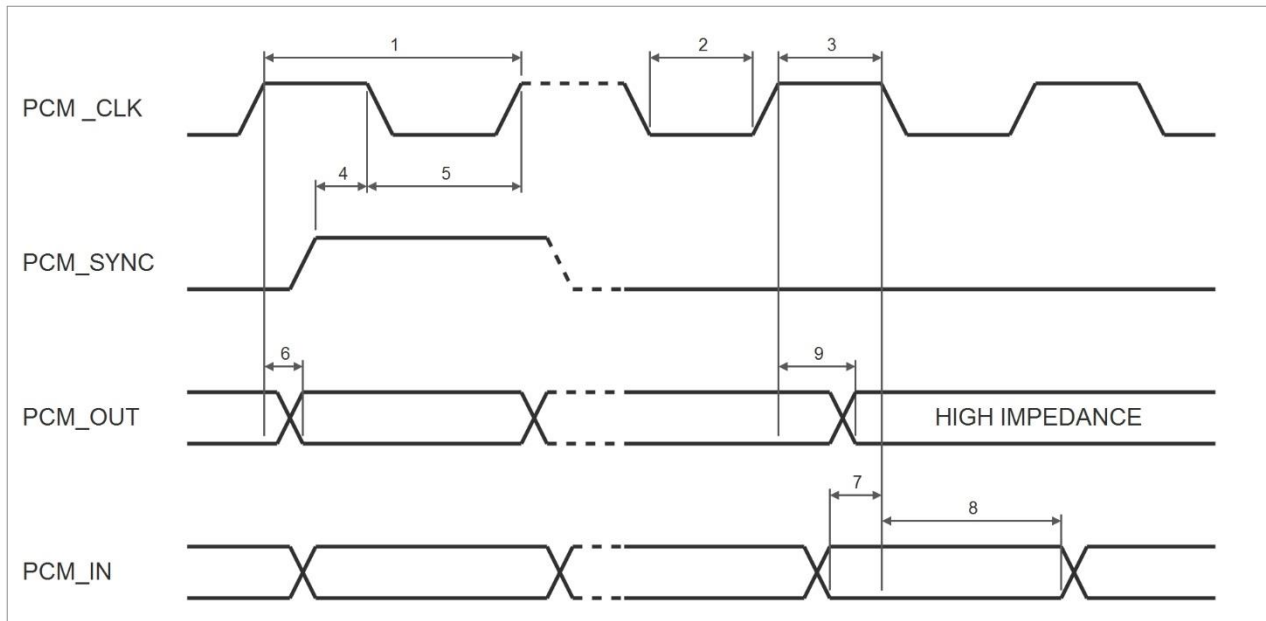


Figure 11: PCM Timing specification – Short Frame Sync., Slave mode

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
1	PCM clock frequency	-	-	-	12	MHz
2	PCM bit clock LOW	-	41	-	-	ns
3	PCM bit clock HIGH	-	41	-	-	ns
4	PCM_SYNC setup	-	8	-	-	ns
5	PCM_SYNC hold	-	8	-	-	ns
6	PCM_OUT delay	-	0	-	25	ns
7	PCM_IN setup	-	8	-	-	ns
8	PCM_IN hold	-	8	-	-	ns
9	Delay from rising edge of PCM_CLK during last bit period to PCM_OUT becoming high impedance	-	0	-	25	ns

Table 18: PCM Timing specification – Short Frame Sync., Slave mode

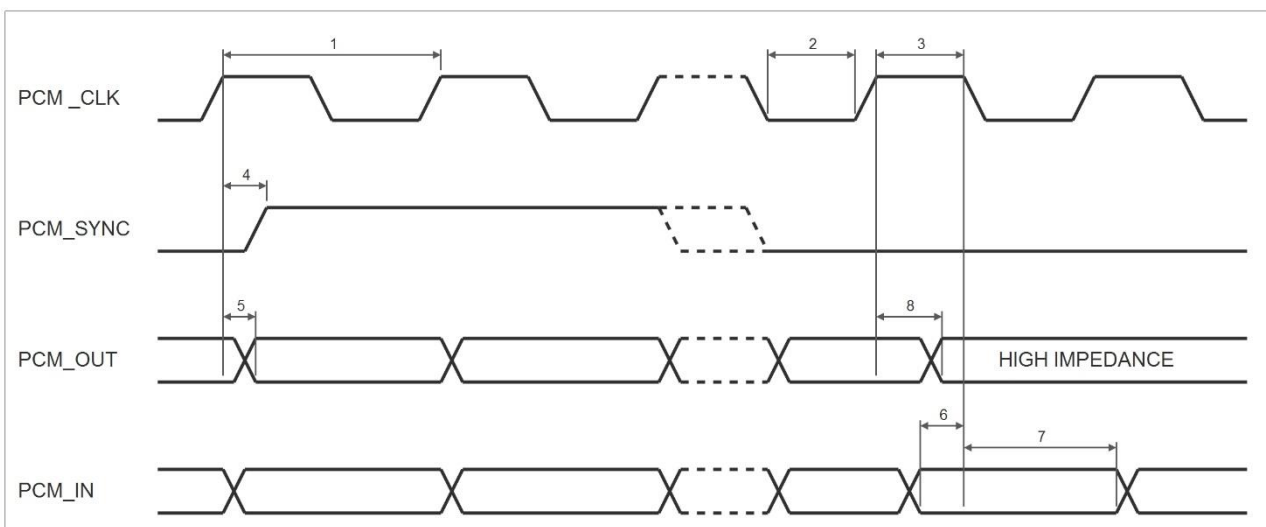
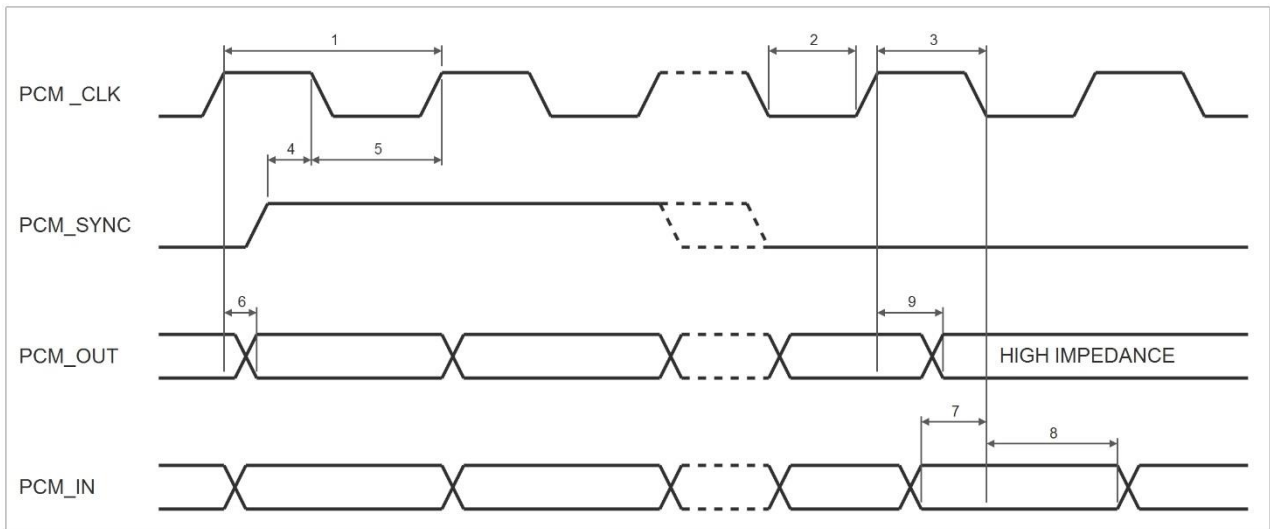


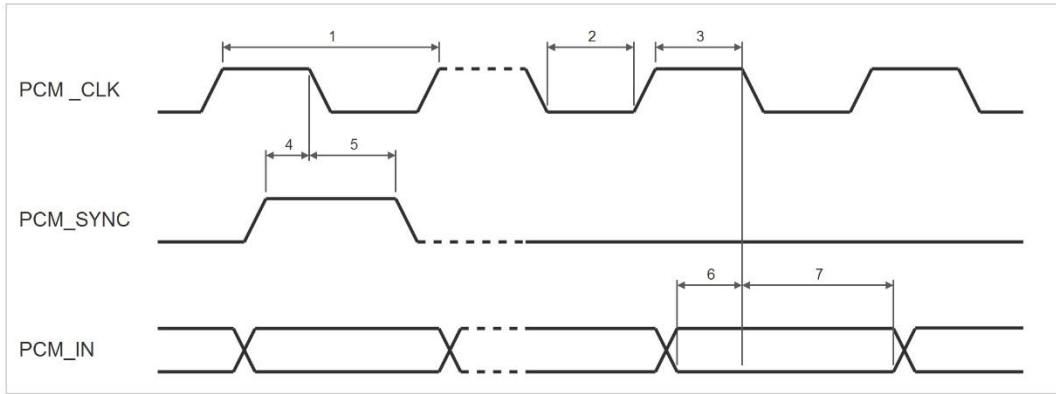
Figure 12: PCM Timing specification – Long Frame Sync., Master mode

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
1	PCM clock frequency	-	-	-	12	MHz
2	PCM bit clock LOW	-	41	-	-	ns
3	PCM bit clock HIGH	-	41	-	-	ns
4	PCM_SYNC delay	-	0	-	25	ns
5	PCM_OUT delay	-	0	-	25	ns
6	PCM_IN setup	-	8	-	-	ns
7	PCM_IN hold	-	8	-	-	ns
8	Delay from rising edge of PCM_CLK during last bit period to PCM_OUT becoming high impedance	-	0	-	25	ns

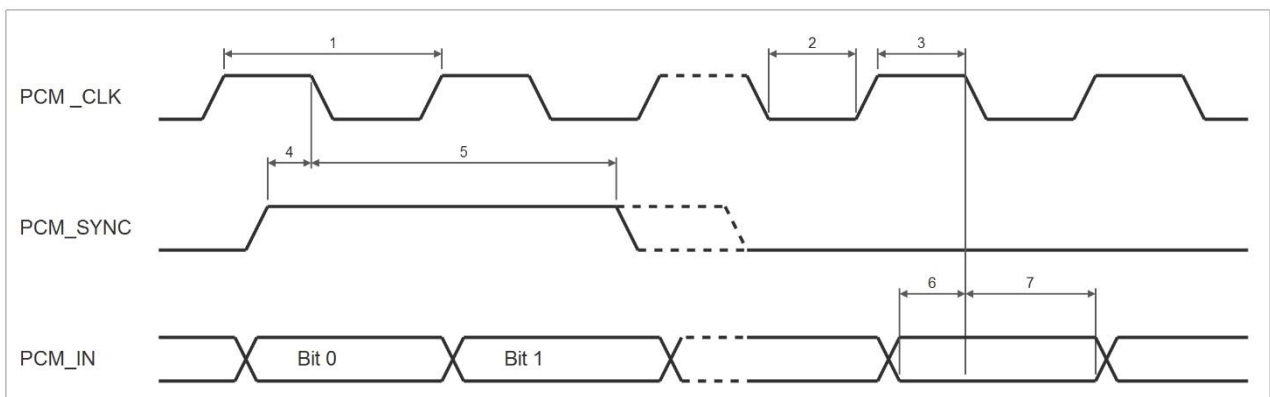
Table 19: PCM Timing specification – Long Frame Sync., Master mode

Figure 13: PCM Timing specification – Long Frame Sync., Slave mode

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
1	PCM clock frequency	-	-	-	12	MHz
2	PCM bit clock LOW	-	41	-	-	ns
3	PCM bit clock HIGH	-	41	-	-	ns
4	PCM_SYNC setup	-	8	-	-	ns
5	PCM_SYNC hold	-	8	-	-	ns
6	PCM_OUT delay	-	0	-	25	ns
7	PCM_IN setup	-	8	-	-	ns
8	PCM_IN hold	-	8	-	-	ns
9	Delay from rising edge of PCM_CLK during last bit period to PCM_OUT becoming high impedance	-	0	-	25	ns

Table 20: PCM timing specification – long frame sync., slave mode


Figure 14: PCM burst mode timing specification – short frame sync., receiver only

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
1	PCM clock frequency	-	-	-	24	MHz
2	PCM bit clock LOW	-	20.8	-	-	ns
3	PCM bit clock HIGH	-	20.8	-	-	ns
4	PCM_SYNC setup	-	8	-	-	ns
5	PCM_SYNC hold	-	8	-	-	ns
6	PCM_IN setup	-	8	-	-	ns
7	PCM_IN hold	-	8	-	-	ns

Table 21: PCM burst mode timing specification – short frame sync., receiver only

Figure 15: PCM burst mode timing specification – long frame sync., receiver only

Symbol	Parameter	Condition	Min.	Typ	Max.	Units
1	PCM clock frequency	-	-	-	24	MHz
2	PCM bit clock LOW	-	20.8	-	-	ns
3	PCM bit clock HIGH	-	20.8	-	-	ns
4	PCM_SYNC setup	-	8	-	-	ns
5	PCM_SYNC hold	-	8	-	-	ns
6	PCM_IN setup	-	8	-	-	ns
7	PCM_IN hold	-	8	-	-	ns

Table 22: PCM burst mode timing specification – long frame sync., receiver only

2.6 I2S interface

JODY-W1 series modules support I2S interface that provides clock rate in master mode 1.536 MHz (32 bits per frame) or 2.400 MHz (50 bits per frame).

This interface is addressable over the PCM pins, which can be routed to the I²S interface through HCI commands. The following I²S signals are mapped with the PCM pins:

PCM_CLK → I2S clock, can be master (output) or slave (input)
PCM_SYNC → I2S WS, can be master (output) or slave (input)
PCM_OUT → I2S data output
PCM_IN → I2S data input

2.6.1 I2S interface specifications

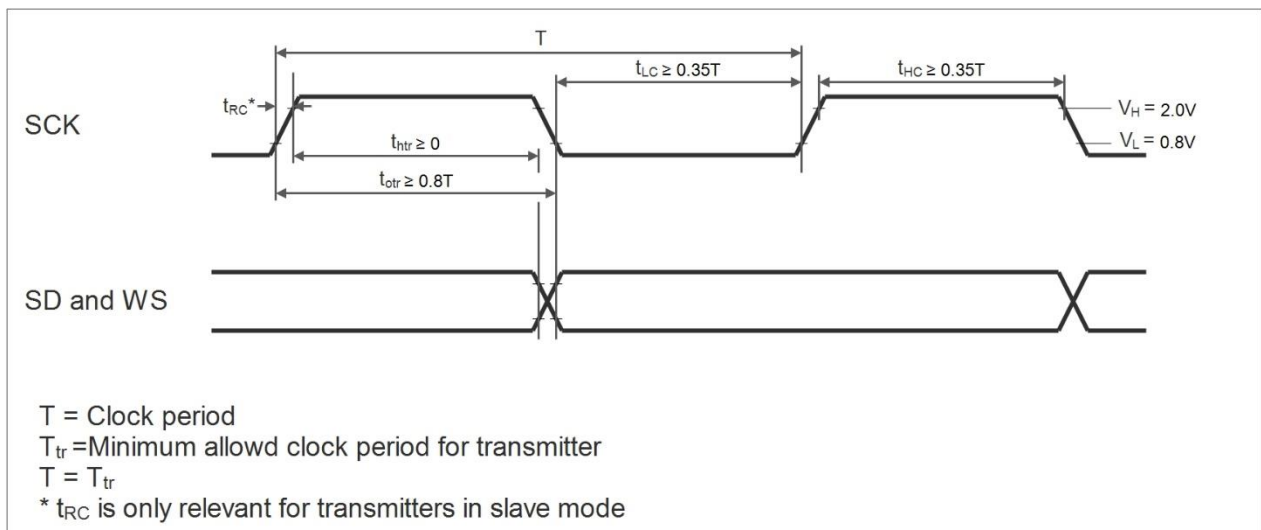


Figure 16: I2S transmitter timing

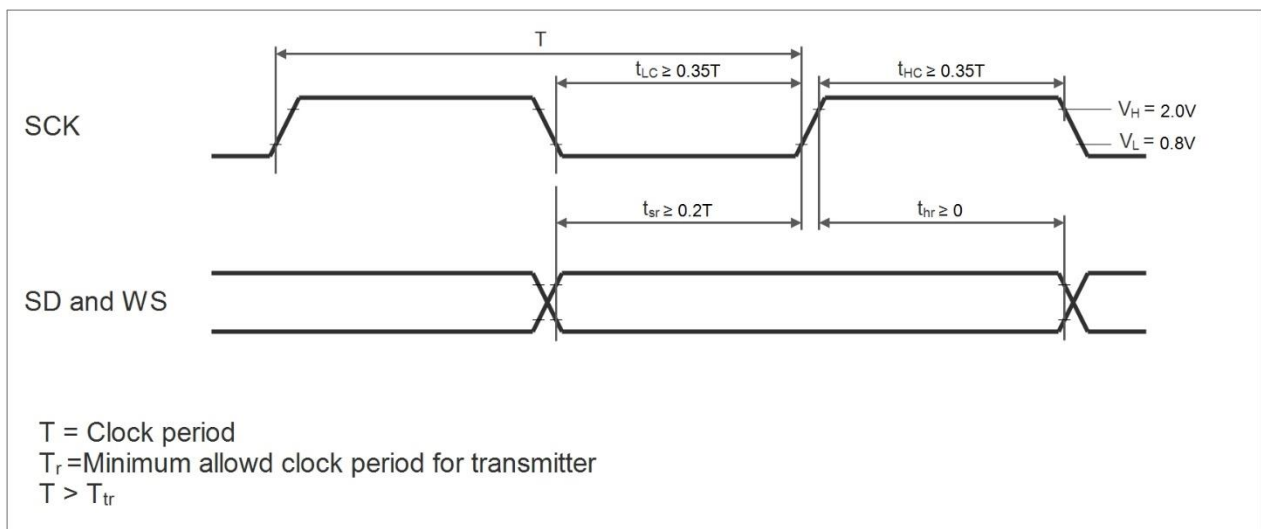


Figure 17: I2S receiver timing

Parameter	Transmitter				Receiver				Notes
	Lower limit		Upper limit		Lower limit		Upper limit		
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Clock Period T	Ttr	-	-	-	Ttr	-	-	T	a
Master Mode: Clock generated by transmitter or receiver									
HIGH tHC	0.35Ttr	-	-	-	0.35Ttr	-	-	-	b
Low tLC	0.35Ttr	-	-	-	0.35Ttr	-	-	-	b
Slave Mode: Clock accepted by transmitter or receiver									
HIGH tHC	-	0.35Ttr	-	-	-	0.35Ttr	-	-	c
Low tLC	-	0.35Ttr	-	-	-	0.35Ttr	-	-	c
Rise time tRC	-	-	0.15Ttr	-	-	-	-	-	d
Transceiver									
Delay tdtr	-	-	-	0.8Ttr	-	-	-	-	e
Hold time thtr	0	-	-	-	-	-	-	-	d
Receiver									
Setup time tsr	-	-	-	-	-	0.2Tr	-	-	f
Hold time thr	-	-	-	-	-	0	-	-	f

Table 23: Timing for I2S transmitters and receivers

- The system clock period T must be greater than T_{tr} and T_r because both the transmitter and receiver must be able to handle the data transfer rate.
- At all data rates in master mode, the transmitter or receiver generates a clock signal with a fixed mark/space ratio. For this reason, t_{HC} and t_{LC} are specified with respect to T.
- In slave mode, the transmitter and receiver need a clock signal with minimum HIGH and LOW periods so that they can detect the signal. So long as the minimum periods are greater than 0.35T_r, any clock that meets the requirements can be used.
- Because the delay (t_{dtr}) and the maximum transmitter speed (defined by T_{tr}) are related, a fast transmitter driven by a slow clock edge can result in t_{dtr} not exceeding t_{RC} which means t_{htr} becomes zero or negative. Therefore, the transmitter has to guarantee that t_{htr} is greater than or equal to zero, so long as the clock rise-time t_{RC} is not more than t_{RCmax}, where t_{RCmax} is not less than 0.15T_{tr}.
- To allow data to be clocked out on a falling edge, the delay is specified with respect to the rising edge of the clock signal and T, always giving the receiver sufficient setup time.
- The data setup and hold time must not be less than the specified receiver setup and hold time.

2.7 LTE coexistence interface

For optimal performance, an external, co-located, wireless device can be used to manage wireless medium sharing.³ JODY-W1 supports an external UART handshake interface to enable signaling between the module and the external device.

³ External coexistence interface is not supported in current firmware.

3 Pin definition

3.1 Pin description

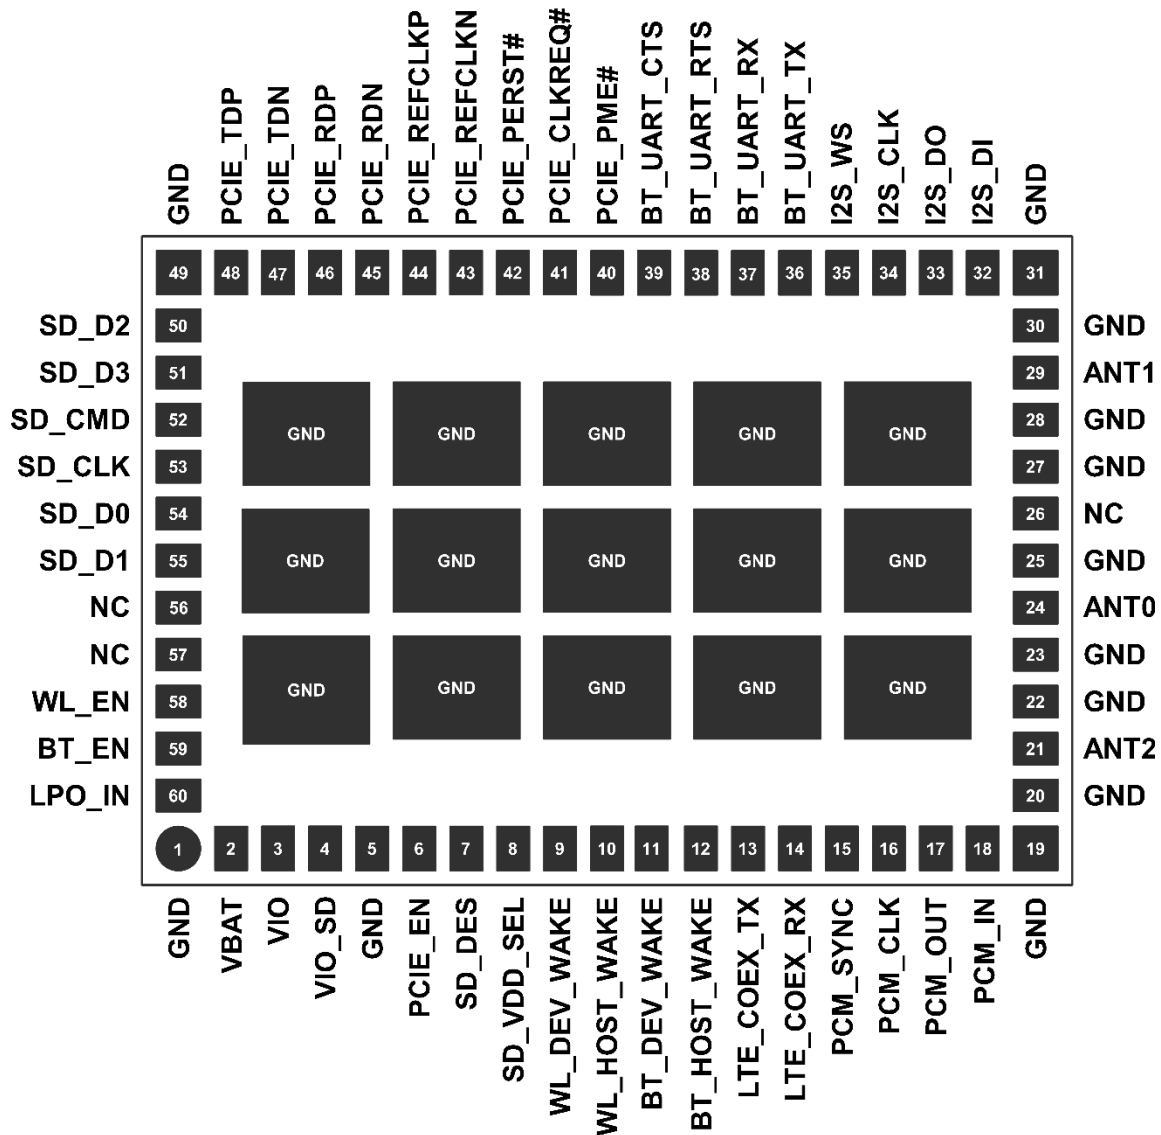


Figure 18: Pin assignment (top view)

No.	Name	Pin type	Description	Power supply domain
1	GND	Ground	Ground	
2	VBAT	Power	3.2 V < VBAT < 4.8 V	
3	VIO	Power	VIO Supply (1.8 V or 3.3 V)	
4	VIO_SD	Power	VIO Supply (1.8 V or 3.3 V) for SDIO and PCIe Out-of-Band signals	
5	GND	Ground	Ground	
6	PCIE_EN	I	See Table 8 for Host Interface selection	VIO
7	SD_DES	I	See Table 8 for Host Interface selection	VIO
8	SD_VDD_SEL	I	See Table 8 for Host Interface selection	VIO
9	WL_DEV_WAKE	I	Wi-Fi device wake-up signal. Asserted: Wi-Fi device must wake-up or remain awake	VIO

No.	Name	Pin type	Description	Power supply domain
			De-asserted: Wi-Fi device may sleep when the sleep criteria is met	
10	WL_HOST_WAKE	O	Wi-Fi HOST wake-up signal Asserted: Host device must wake-up or remain awake De-asserted: Host device may sleep when the sleep criteria is met	VIO
11	BT_DEV_WAKE	I	Bluetooth device wake-up signal: Asserted: Bluetooth device must wake-up or remain awake De-asserted: Bluetooth device may sleep when sleep criteria are met.	VIO
12	BT_HOST_WAKE	O	Bluetooth Host wake-up signal: Asserted: Host device must wake-up or remain awake De-asserted: Host device may sleep when sleep criteria are met	VIO
13	LTE_COEX_TX	O	Coexistence WCI-2 interface. TX signal	VIO
14	LTE_COEX_RX	I	Coexistence WCI-2 interface. RX signal	VIO
15	PCM_SYNC	I/O	PCM sync, can be output (master) or input (slave)	VIO
16	PCM_CLK	I/O	PCM clock, can be output (master) or input (slave)	VIO
17	PCM_OUT	O	PCM data output	VIO
18	PCM_IN	I	PCM data input	VIO
19	GND	Ground	Ground	
20	GND	Ground	Ground	
21	ANT2	I/O, RF	Antenna pin (see also Block diagrams)	
22	GND	Ground	Ground	
23	GND	Ground	Ground	
24	ANT0	I/O, RF	Antenna pin (see also Block diagrams)	
25	GND	Ground	Ground	
26	NC	-	Reserved antenna pin. Do not connect.	
27	GND	Ground	Ground	
28	GND	Ground	Ground	
29	ANT1	I/O, RF	Antenna pin (see also Block diagrams)	
30	GND	Ground	Ground	
31	GND	Ground	Ground	
32	I2S_DI	I/O	Reserved for I ² S interface. Do not connect!	VIO
33	I2S_DO	I/O	To connect a I ² S interface the PCM pins can be used. The PCM interface can be configured as an I ² S interface. See also PCM Interface .	VIO
34	I2S_CLK	I/O		VIO
35	I2S_WS	I/O		VIO
36	BT_UART_TX	O	Fast UART serial data output for the Bluetooth device	VIO
37	BT_UART_RX	I	Fast UART serial data input for the Bluetooth device	VIO
38	BT_UART_RTS	O	Fast UART active-low request-to-send signal for the Bluetooth device	VIO
39	BT_UART_CTS	I	Fast UART active-low clear-to-send signal for the Bluetooth device	VIO
40	PCIE_PME#	OD	PCI power management event output	VIO_SD
41	PCIE_CLKREQ#	OD	PCIe clock request signal	VIO_SD
42	PCIE_PERST#	I	PCIe System reset	VIO_SD
43	PCIE_REFCLKN	I	PCIe 100 MHz clock differential input, AC coupling capacitors 100 pF included in the module.	
44	PCIE_REFCLKP	I		
45	PCIE_RDN	I	PCIe receiver differential input, DC coupled inputs, use 100 nF AC coupling capacitors placed closer to the Host TDN/TDP differential output	
46	PCIE_RDP	I		

No.	Name	Pin type	Description	Power supply domain
47	PCIE_TDN	O	PCIe transmitter differential output, AC coupling capacitors 100 nF included in the module, connect to the Host RDN/RDP input directly	
48	PCIE_TDP	O		
49	GND	Ground	Ground	
50	SD_D2	I/O	SDIO Data line bit [2]	VIO_SD
51	SD_D3	I/O	SDIO Data line bit [3]	VIO_SD
52	SD_CMD	I/O	SDIO Command line	VIO_SD
53	SD_CLK	I	SDIO Clock input	VIO_SD
54	SD_D0	I/O	SDIO Data line bit [0]	VIO_SD
55	SD_D1	I/O	SDIO Data line bit [1]	VIO_SD
56	NC	-	Leave unconnected (internally connected to the USB interface, debugging only)	
57	NC	-	Leave unconnected (internally connected to the USB interface, debugging only)	
58	WL_EN	I	Power up or power down the Wi-Fi section of the chipset (like a reset)	VIO
59	BT_EN	I	Power up or power down the Bluetooth section of the chipset (like a reset)	VIO
60	LPO_IN	I	Clock input for external sleep clock source (32.768 kHz)	
EP	GND	Ground	15 Ground/Thermal exposed pins, connect to the ground	

Table 24: JODY-W1 series pin description

4 Electrical specifications

Stressing the device above one or more of the [Absolute maximum ratings](#) can cause permanent damage. These are stress ratings only. Operating the module at these or at any conditions other than those specified in [Operating conditions](#) should be avoided. Exposure to absolute maximum rating conditions for extended periods can affect device reliability.

Operating condition ranges define limits within which the functionality of the device is guaranteed. Where application information is given, it is advisory only and is not part of the specification.

4.1 Absolute maximum ratings

Symbol	Description	Min.	Max.	Units
V _{BAT}	Power supply voltage	-0.5	6.0	V
V _{IO}	I/O supply voltage 1.8V/3.3V	-0.5	3.9	V
V _{IO_SD}	SDIO supply voltage 1.8V/3.3V	-0.5	3.9	V
T _{STORAGE}	Storage temperature	-40	+85	°C

Table 25: Absolute maximum ratings

The product is not protected against overvoltage or reversed voltages. If necessary, voltage spikes exceeding the power supply voltage specification, given in table above, must be limited to values within the specified boundaries by using appropriate protection devices.

4.2 Operating conditions

Symbol	Parameter	Min.	Typ	Max.	Units
V _{BAT}	Power supply voltage	3.2	-	4.8	V
V _{IO}	I/O supply voltage 1.8V/3.3V	1.62	-	3.63	V
V _{IO_SD}	SDIO supply voltage 1.8V/3.3V	1.62	-	3.63	V
T _A	Ambient operating temperature	-40	-	+85	°C
Ripple Noise	Peak-to-peak voltage ripple on V _{BAT} and V _{IO} supply lines.	-	-	10	mV

Table 26: Operating conditions

For temperature above 55 °C, the radio transceiver autonomously monitors its junction temperature and employs transmit duty cycle throttling to regulate power dissipation and thereby ensures that the junction temperature is safely below 115 °C. Transmit duty cycle throttling can lower throughput to up to 25% of maximum throughput at nominal temperature.

4.3 Digital pad ratings

The following ratings are only for the SDIO interface I/O Pins and PCIe Out-of-Band signals (PCIE_PERST_L, PCIE_PME_L and PCIE_CLKREQ_L).

Symbol	Parameter	V _{IO_SD}	Min.	Max.	Units
V _{IH}	Input high voltage	1.8 V	1.27	-	V
		3.3 V	0.625*V _{IO_SD}	-	V
V _{IL}	Input low voltage	1.8 V	-	0.58	V
		3.3 V	-	0.25*V _{IO_SD}	V
V _{OH}	Output high voltage @ 2mA	1.8 V	1.4	-	V
		3.3 V	0.75*V _{IO_SD}	-	V
V _{OL}	Output low voltage @ 2mA	1.8 V	-	0.45	V
		3.3 V	-	0.125*V _{IO_SD}	V

Table 27: DC characteristics SDIO digital I/O pins

The following ratings are for all other digital I/O pins including GPIOs.

Symbol	Parameter	VIO	Min.	Max.	Units
V _{IH}	Input high voltage	1.8 V	0.65*VIO	-	V
		3.3 V	2.0	-	V
V _{IL}	Input low voltage ^a	1.8 V	-	0.35*VIO	V
		3.3 V	-	0.8	V
V _{OH}	Output high voltage @ 2mA	1.8 V	VIO-0.45	-	V
		3.3 V	VIO-0.4	-	V
V _{OL}	Output low voltage @ 2mA	1.8 V	-	0.45	V
		3.3 V	-	0.4	V

Table 28: DC characteristics digital I/O pins

4.4 Wi-Fi power consumption

Operation mode: 2.4 GHz and 5 GHz Wi-Fi, BT powered down	Typical peak VBAT (3.3 V) current, mA	Typical peak VBAT (3.3 V) idle current, mA	Typical peak VIO (1.8 V) current, µA
TX modes			
CCK 11 Mbps, BW20, Ch7, Core2, 18 dBm	360	110	60
MSC7, HT20, Ch7, Core2, 14dBm	270	110	60
BPSK, 6 Mbps, HT20, Ch100, Core1, 17 dBm	520	135	60
BPSK, 6 Mbps, HT20, Ch100, Core2, 17 dBm	450	135	60
MCS7, HT20, SGI, CH100, Core1, 14 dBm	440	135	60
MCS7, HT20, SGI, CH100, Core2, 14 dBm	420	135	60
MCS7, HT40, SGI, Ch100, Core1, 14 dBm	460	165	60
MCS7, HT40, SGI, Ch100, Core2, 14 dBm	430	165	60
MCS9, VHT40, SGI, Ch100, Core1, 12 dBm	430	165	60
MCS9, VHT40, SGI, Ch100, Core2, 12 dBm	420	165	60
MCS9, VHT80, SGI, Ch100, Core1, 12 dBm	470	240	60
MCS9, VHT80, SGI, Ch100, Core2, 12 dBm	470	240	60
MCS9, VHT40, SGI, Ch100, 2 streams, 12 dBm	760	165	60
MCS9, VHT80, SGI, Ch100, 2 streams, 12 dBm	820	240	60
RX modes			
MCS7, HT40, Ch100, Core2	190	165	60
MCS7, HT20, Ch7, Core2	120	110	60
1 Mbps, BW20, Ch7, Core2	110	110	60
6 Mbps, BW20, Ch100, Core2	140	135	60
MCS7, HT20, Ch100, Core2	140	135	60
MCS7, HT20, Ch100, Core1	140	135	60
MCS0, HT80, Ch100, Core1	245	240	60

Table 29: Current consumption for different Wi-Fi TX- and RX-modes at 25 °C

Operation mode: Power save modes	Typical – VBAT (3.3 V) current, mA	Typical – VIO (1.8 V) current, µA	Typical – VIO_SD (1.8 V) current, µA
Sleep (Idle, not associated), FW not loaded	13	30	35
Sleep (Idle, not associated), FW loaded	0.005	340	52
Wi-Fi power save, DTIM 1	2.5	280	52
Wi-Fi power save, DTIM 2	1.3	305	52
Wi-Fi power save, DTIM 3	0.85	315	52

Table 30: Current consumption for Wi-Fi power-save modes at 25 °C

4.5 Bluetooth power consumption

Operation mode: Bluetooth mode with Wi-Fi powered down	Typical VBAT (3.3 V) current, μA	Typical VIO (1.8 V) current, μA	Typical VIO (3.3 V) current, μA
Sleep	5.3	130	170
Standard 1.28s inquiry scan	150	150	185
DM5/DH5	56000	40	50
BLE scan	160	150	185
BLE advertising, unconnectable 1 sec	60	150	185

Table 31: Current consumption for Bluetooth operation at 25 °C

4.6 Radio specifications

4.6.1 Bluetooth

Parameter	Specifications
RF Frequency Range	2.402 – 2.480 GHz
Supported Modes	Bluetooth v4.2+EDR
Number of channels	79
Modulation	1 Mbps: GFSK (BDR) 2 Mbps: $\pi/4$ DQPSK (EDR) 3 Mbps: 8DQPSK (EDR)
Transmit Power	BDR: +12 dBm $\pm$ 2 dB EDR: +10 dBm $\pm$ 2 dB BLE: +8 dBm $\pm$ 2 dB
Receiver Sensitivity	BDR: -93 dBm $\pm$ 1.5 dB EDR: -89 dBm $\pm$ 1.5 dB BLE: -95 dBm $\pm$ 1.5 dB

Table 32: Bluetooth radio parameters

4.6.2 Wi-Fi

The JODY-W1 series modules support dual-band Wi-Fi with 802.11a/b/g/n/ac operation in the 2.4 GHz and 5 GHz radio bands.

Parameter		Operation Mode	802.11 EVM limit	Specification (typ. output power tolerance ± 2 dB)
Maximum transmit power	2.4 GHz	DSSS/CCK	-9 dB	18 dBm
		OFDM, BPSK	-8 dB	15 dBm
		OFDM, QPSK	-13 dB	15 dBm
		OFDM, 16-QAM	-19 dB	15 dBm
		OFDM, 64-QAM, 3/4	-25 dB	13 dBm
		OFDM, 64-QAM, 5/6	-28 dB	13 dBm
	5 GHz	OFDM, BPSK	-8 dB	15 dBm
		OFDM, QPSK	-13 dB	15 dBm
		OFDM, 16-QAM	-19 dB	15 dBm
		OFDM, 64-QAM, 3/4	-25 dB	13 dBm ⁴
		OFDM, 64-QAM, 5/6	-28 dB	13 dBm ⁴
		OFDM, 256-QAM, 3/4	-30 dB	8 dBm
		OFDM, 256-QAM, 5/6	-32 dB	8 dBm

⁴ 11 dBm for JODY-W164-27A-11A

Table 33: Wi-Fi Radio maximum transmit power parameter

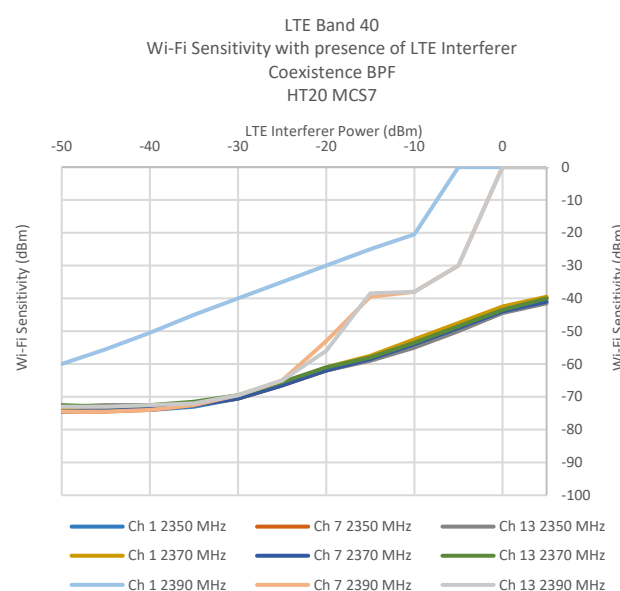
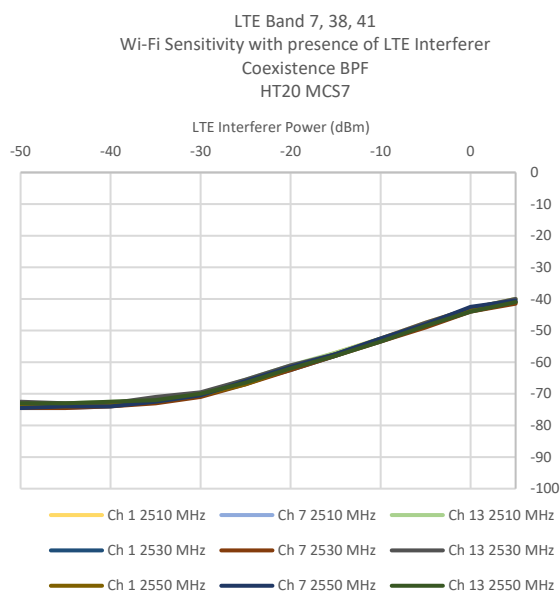
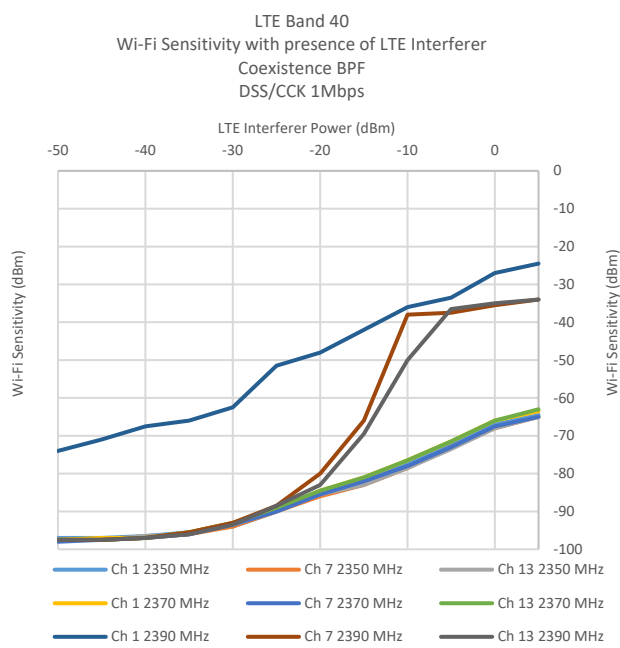
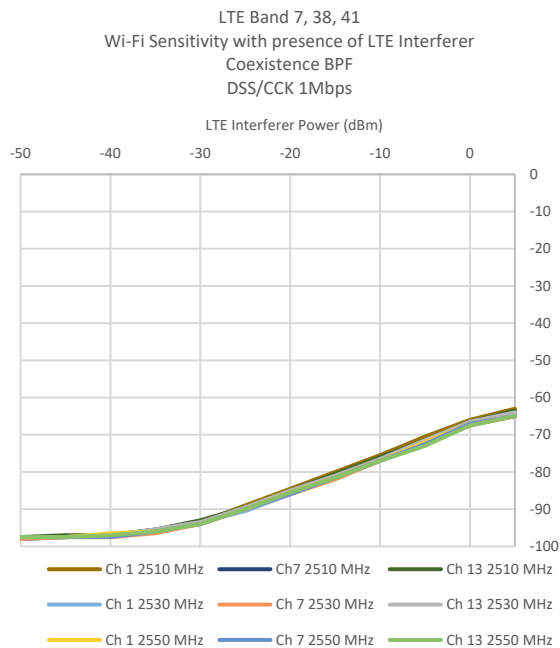
Parameter	Operation mode			Specification		
RF Frequency range	802.11b/g/n			2.400 – 2.500 GHz		
	802.11a/n/ac			4.900 – 5.845 GHz		
Modulation	802.11b			CCK and DSSS		
	802.11a/g/n/ac			OFDM		
Supported data rates	802.11b			1, 2, 5.5, 11 Mbps		
	802.11a/g			6, 9, 12, 18, 24, 36, 48, 54 Mbps		
	802.11n SISO			MCS0 - MCS7 (150 Mbps)		
	802.11n MIMO			MCS8 – MCS15 (300 Mbps)		
	802.11ac SISO			MCS0 – MCS9 (433 Mbps)		
	802.11ac MIMO			MCS0 – MCS9 (867 Mbps)		
Supported channel bandwidth	2.4 GHz band			20 MHz		
	5 GHz band			20, 40, 80 MHz		
Supported guard interval (GI)	802.11n			400, 800 ns		
	802.11ac			Short guard interval supported		
Receiver sensitivity	2.4 GHz	802.11b	1 Mbps	-98 dBm ± 1 dB		
			11 Mbps	-90 dBm ± 1 dB		
		802.11g SISO	6 Mbps	-95 dBm ± 1 dB		
			54 Mbps	-78 dBm ± 1 dB		
		802.11n SISO	20 MHz	MCS0	-95 dBm ± 1 dB	
				MCS7	-75 dBm ± 1 dB	
		802.11n MIMO	20 MHz	MCS0	-96 dBm ± 1 dB	
				MCS7	-79 dBm ± 1 dB	
		5 GHz	802.11n SISO	40 MHz	MCS0	-89 dBm ± 1 dB
					MCS7	-70 dBm ± 1 dB
			802.11n MIMO	40 MHz	MCS8	-90 dBm ± 1 dB / core
					MCS15	-70 dBm ± 1 dB / core
	802.11ac SISO		20 MHz	MCS0	-92 dBm ± 1 dB	
				MCS8	-68 dBm ± 1 dB	
	802.11ac MIMO		20 MHz	MCS0	-92 dBm ± 1 dB / core	
				MCS8	-68 dBm ± 1 dB / core	
	802.11ac SISO		40 MHz	MCS0	-89 dBm ± 1 dB	
				MCS9	-64 dBm ± 1 dB	
	802.11ac MIMO		40 MHz	MCS0	-89 dBm ± 1 dB / core	
				MCS9	-64 dBm ± 1 dB / core	
	802.11ac SISO	80 MHz	MCS0	-86 dBm ± 1 dB		
			MCS9	-60 dBm ± 1 dB		
	802.11ac MIMO	80 MHz	MCS0	-86 dBm ± 1 dB / core		
			MCS9	-60 dBm ± 1 dB / core		

Table 34: Wi-Fi Radio parameters

4.7 LTE Coexistence performance

4.7.1 Wi-Fi receiver performance with LTE coexistence filter

The figures below show Wi-Fi sensitivity of JODY-W1 modules including dedicated high performance coexistence filter in the presence of an LTE interferer allocated in any of the bands 7, 38, 40 or 41. The modules are specified according to Table 3.



4.7.2 Wi-Fi receiver performance with ordinary Wi-Fi Band pass filter

Figure 19 shows the Wi-Fi sensitivity of JODY-W1 modules, including data for a standard Wi-Fi band pass filter in the presence of an LTE interferer allocated in bands 7, 38, 40, and 41. JODY-W1 modules are specified in accordance with Table 3.

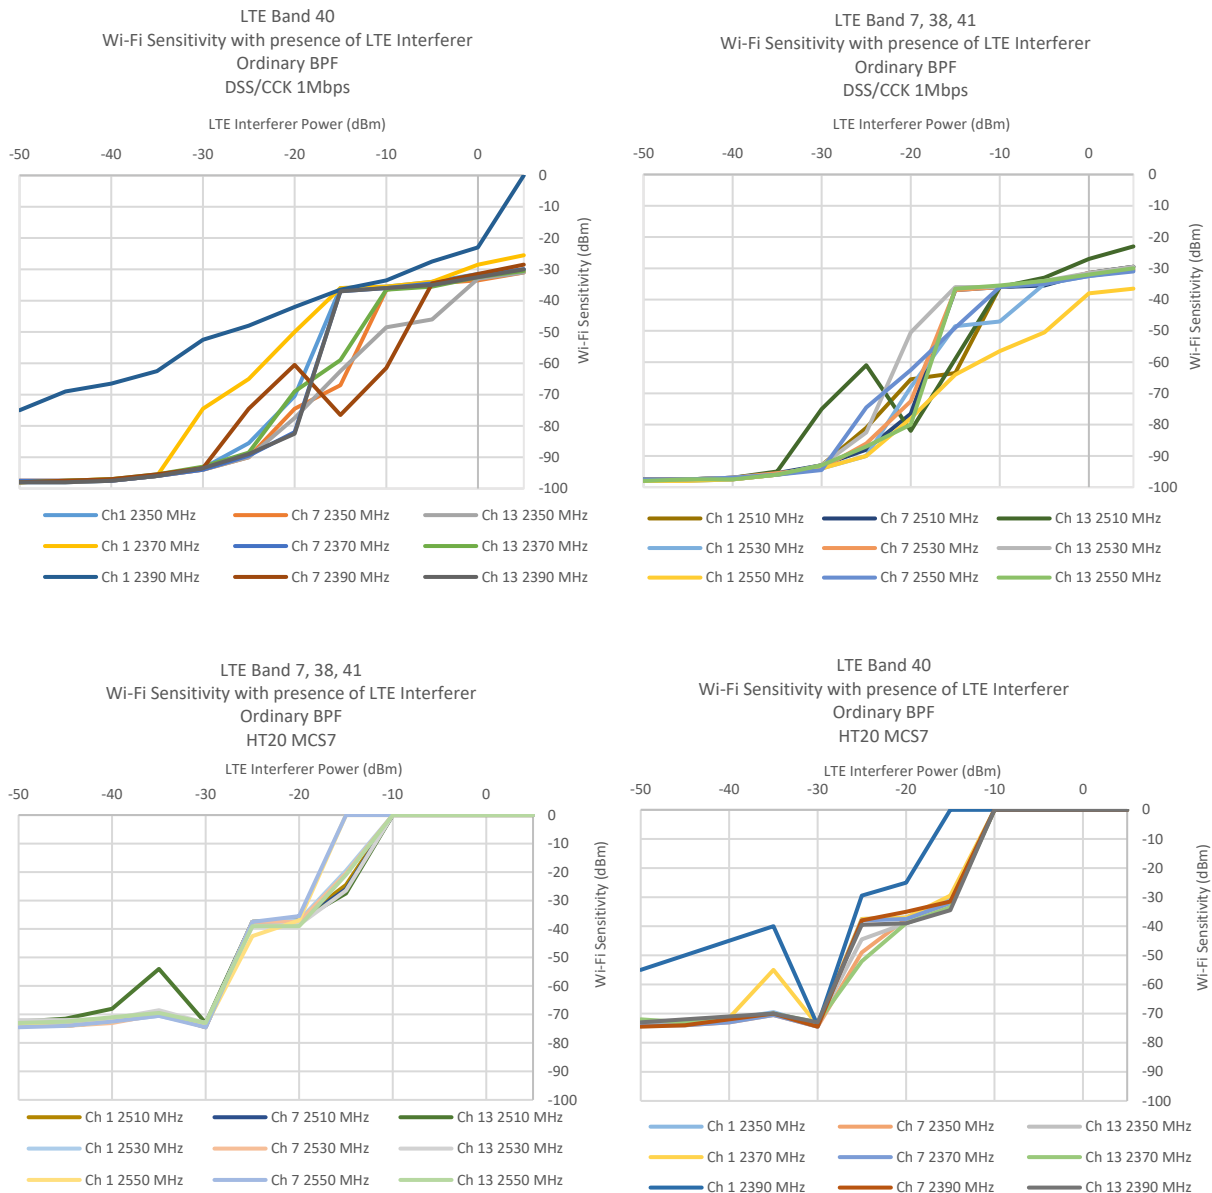


Figure 19: Wi-Fi sensitivity

4.8 Module thermal information

All measurements are done according to the JEDEC standards - JESD51-2A for the junction to ambient, JESD51-8 for the junction to board and JESD51-14 for the junction to case values. For the measurements, a 2S2P board with the dimension of 101.5 x 114.5 mm was used.

Symbol	Parameter	Condition	Value	Units
θ_{JA}	Junction to ambient thermal resistance $\theta_{JA} = (T_J - T_A) / P_H$ T_J = Junction temperature T_A = Ambient temperature P_H = Dissipated power from device	JESD51-2A JEDEC 2S2P board inside thermal chamber, No air flow	19.4	°C/W
Ψ_{JT}	Junction to top of package thermal characterization parameter $\theta_{JA} = (T_J - T_T) / P_H$ T_T = Top of package temperature	JESD51-2A JEDEC 2S2P board inside thermal chamber, No air flow	13.6	°C/W
Ψ_{JB}	Junction to bottom thermal characterization parameter $\theta_{JA} = (T_J - T_B) / P_H$ T_B = Board temperature	JESD51-2A JEDEC 2S2P board inside thermal chamber No air flow	13.4	°C/W
θ_{JC}	Junction to case shielding thermal resistance $\theta_{JA} = (T_J - T_C) / P_H$ T_C = Case temperature	JESD51-14 JEDEC 2S2P board with ring cold plate, No air flow	12.5	°C/W
θ_{JB}	Junction to board thermal resistance $\theta_{JA} = (T_J - T_B) / P_H$ T_B = Board temperature	JESD51-8 JEDEC 2S2P board with ring cold plate, No air flow	12.3	°C/W

Table 35: Module thermal information

5 Host drivers and firmware

5.1 General principle

JODY-W1 series modules do not contain any persistent software. A firmware binary is downloaded by the host operating system driver during the system start-up. Separate driver packages, including the firmware binaries, are available for PCIe and SDIO Wi-Fi host interface operation.



Always use the latest available firmware to ensure the best performances of the module.

5.2 Supported operating systems

5.2.1 Linux

Linux device drivers are available free of charge from the chipset manufacturer. A Software License Agreement (SLA) must be signed with the chipset manufacturer to obtain the driver package. This package includes:

- Dedicated Kernel driver, to bind the Wi-Fi device to the kernel. The driver sources will be provided.
- A dedicated Wi-Fi firmware image, which will be uploaded during initialization of the Wi-Fi device.
- A dedicated Bluetooth firmware image, which will be uploaded during initialization of the Bluetooth device.
- Laboratory and manufacturing tools.

For a detailed description of the driver packages, refer to JODY-W1 series System integration manual [2].

6 Mechanical specifications

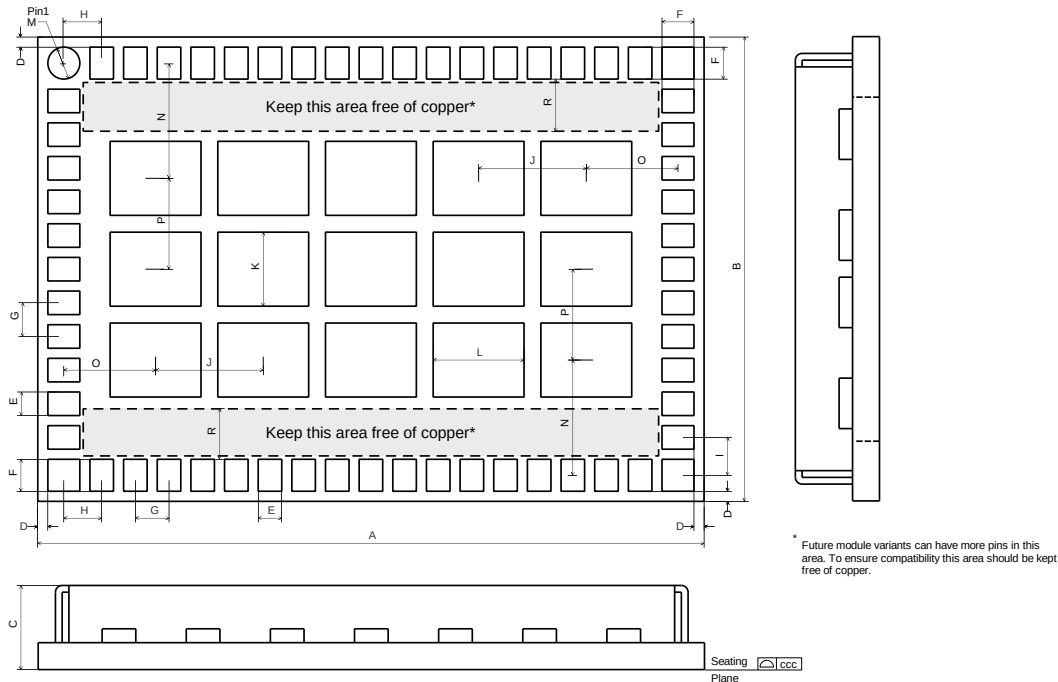


Figure 20: JODY-W1 series dimensions (bottom view)

Parameter	Description	Typical		Tolerance	
A	Module Length [mm]	19.8	(779.5 mil)	+0.35/-0.1	(+13.8/-3.9 mil)
B	Module Width [mm]	13.8	(543.3 mil)	+0.1/-0.1	(+3.9/-3.9 mil)
C	Module Thickness [mm]	2.5	(98.4 mil)	+0.2/-0.2	(+7.9/-7.9 mil)
ccc	Seating Plane Coplanarity [mm]	<0.1	(3.94 mil)		
D	PCB Edge to Pin Edge [mm]	0.3	(11.8 mil)	+0.20/-0.20	(+7.9/-7.9 mil)
E	Pin Width [mm]	0.7	(27.6 mil)	+0.05/-0.05	(+2.0/-2.0 mil)
F	Pin Length [mm]	0.95	(37.4 mil)	+0.05/-0.05	(+2.0/-2.0 mil)
G	Pin to Pin Pitch [mm]	1.0	(39.4 mil)	+0.02/-0.02	(+0.8/-0.8 mil)
H	Horizontal Corner Pin to Pin Pitch [mm]	1.125	(44.3 mil)	+0.02/-0.02	(+0.8/-0.8 mil)
I	Lateral Corner Pin to Pin Pitch [mm]	1.125	(44.3 mil)	+0.02/-0.02	(+0.8/-0.8 mil)
J	Horizontal Thermal Pads Pitch [mm]	3.2	(126.0 mil)	+0.02/-0.02	(+0.8/-0.8 mil)
K	Thermal Pad Height [mm]	2.2	(86.6 mil)	+0.1/-0.1	(+3.9/-3.9 mil)
L	Thermal Pad Length [mm]	2.7	(106.3 mil)	+0.1/-0.1	(+3.9/-3.9 mil)
M	Pin 1 Diameter [mm]	0.95	(37.4 mil)	+0.05/-0.05	(+2.0/-2.0 mil)
N	Horizontal Pin to Thermal Pad Pitch [mm]	3.425	(134.8 mil)	+0.02/-0.02	(+0.8/-0.8 mil)
O	Lateral Pin to Thermal Pad Distance [mm]	2.725	(107.3 mil)	+0.02/-0.02	(+0.8/-0.8 mil)
P	Lateral Thermal Pads Pitch [mm]	2.7	(106.3 mil)	+0.02/-0.02	(+0.8/-0.8 mil)
R	Reserved area for future module variants	1.55	(61.0 mil)	+0.05/-0.05	(+2.0/-2.0 mil)

7 Approvals

JODY-W1 series modules comply with the regulatory demands of Federal Communications Commission (FCC), Industry Canada (IC) and the CE mark.

 See JODY-W1 series System integration manual [2] for detailed information about regulatory compliance requirements of end products that use JODY-W1 series module.

7.1 Compliance with the RoHS directive

The JODY-W1 series modules comply with the Directive 2011/65/EU (EU RoHS 2) and its amendment Directive (UE) 2015/863 (EU RoHS 3).

7.2 European Union regulatory compliance

The JODY-W1 series modules comply with the essential requirements and other relevant provisions of Radio Equipment Directive (RED) 2014/53/EU.

Essential Requirements Radio Equipment Directive 2014/53/EU	Standards
Health and safety (Article 3.1a)	EN 62368-1:2014+A11:2017 EN 62311:2008 (Wi-Fi) EN 62479:2010 (Bluetooth and Bluetooth Low Energy)
EMC (Article 3.1b)	EN 301 489-1 V2.1.1 EN 301 489-17 V3.1.1
Radio Spectrum Efficiency (Article 3.2)	EN 300 328 V2.2.2 EN 301 893 V2.1.1 EN 300 440 V2.1.1
Essential Requirements RoHS Directive 2011/65/EU	Standards
Prevention (Article 4.1)	EN 50581:2012

7.3 FCC and IC compliance

This section contains the FCC and IC compliance information for the JODY-W1 series modules.

7.3.1 FCC and ISED IDs

Model ⁵	FCC ID	ISED ID
JODY-W164-27A, JODY-W163-04A, JODY-W164-15A	XPYJODYW164-07A	8595A-JODYW16407A
JODY-W164-03A, JODY-W163-13A, JODY-W164-13A	XPYJODYW164	8595A-JODYW164
JODY-W167-00A, JODY-W167-03A	XPYJODYW167	8595A-JODYW167

Table 36: FCC and IC IDs for different variants of JODY-W1 series modules

⁵ The model name is identical to the ordering code (cf. Table 42)

7.3.2 FCC compliance statement

The JODY-W1 series modules have modular approval and comply with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation

 Any changes or modifications NOT explicitly APPROVED by u-blox could cause the JODY-W1 series module to cease to comply with FCC rules part 15 thus void the user's authority to operate the equipment.

The internal / external antenna(s) used for this module must provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

In accordance with 47 CFR § 15.19, the end product into which this module is integrated shall bear the following statement in a conspicuous location on the device:

“This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.”

When the end-product is so small or for such use that it is not practical to place the above statement on it, the information shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or on the container in which the device is marketed. However, the FCC ID label must be displayed on the device.

If the end-product will be installed in locations where the end-user is not able to see the FCC ID and/or this statement, the FCC ID and the statement shall also be included in the end-product manual.

 The outside of final products containing the JODY-W1 module must display in a user accessible area a label referring to the enclosed module⁶. This exterior label can use wording such as the following: “Contains Transmitter Module FCC ID: XPYJODYW164” or “Contains FCC ID: XPYJODYW164”.

7.3.3 ISED compliance statement

The JODY-W1 series module complies with ISED (Innovation, Science and Economic Development Canada)⁷ license-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

 Any notification to the end user of installation or removal instructions about the integrated radio module is NOT allowed. Unauthorized modification could void authority to use this equipment.

This equipment complies with ISED RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

⁶ The FCC and IC IDs for the JODY-W1 series module variants are shown in Table 36. Select the applicable ID.

⁷ Formerly known as IC (Industry Canada).

This radio transmitter IC: 8595A-JODYW164 / IC: 8595A-JODYW16407A / IC: 8595A-JODYW167 has been approved by ISED to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

-  Operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.
-  Operation in the 5600-5650 MHz band is not allowed in Canada. High-power radars are allocated as primary users (priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

The ISED certification label of a module shall be clearly visible at all times when installed in the host device; otherwise, the host device must be labeled to display the ISED certification number for the module, preceded by the words “Contains transmitter module”, or the word “Contains”, or similar wording expressing the same meaning, as follows: “Contains transmitter module IC: 8595A-JODYW164”⁸.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet équipement est conforme aux limites d'exposition de rayonnement d'ISED RSS-102 déterminées pour un environnement non contrôlé. Cet équipement devrait être installé et actionné avec la distance minimum 20 cm entre le radiateur et votre corps.

Cet émetteur radio, IC: 8595A-JODYW164 / IC: 8595A-JODYW16407A / IC: 8595A-JODYW167 été approuvé par ISED pour fonctionner avec les types d'antenne énumérés ci-dessous avec le gain maximum autorisé et l'impédance nécessaire pour chaque type d'antenne indiqué. Les types d'antenne ne figurant pas dans cette liste et ayant un gain supérieur au gain maximum indiqué pour ce type-là sont strictement interdits d'utilisation avec cet appareil.

-  Le dispositif de fonctionnement dans la bande 5150-5250 MHz est réservé à une utilisation en intérieur pour réduire le risque d'interférences nuisibles à la co-canal systèmes mobiles par satellite
-  Opération dans la bande 5600-5650 MHz n'est pas autorisée au Canada. Haute puissance radars sont désignés comme utilisateurs principaux (c.-à-d. utilisateurs prioritaires) des bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer des interférences et / ou des dommages à dispositifs LAN-EL.

L'étiquette d'homologation d'ISED d'un module donné doit être posée sur l'appareil hôte à un endroit bien en vue en tout temps. En l'absence d'étiquette, l'appareil hôte doit porter une étiquette sur laquelle figure le numéro d'homologation du module d'ISED, précédé des mots « Contient un module d'émission », ou du mot « Contient », ou d'une formulation similaire allant dans le même sens et qui va comme suit : « Contient le module d'émission IC: 8595A-JODYW164 ».

This radio transmitter IC: 8595A-JODYW164 / IC: 8595A-JODYW16407A / IC: 8595A-JODYW167 has been approved by ISED to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

⁸ The FCC and IC IDs for the JODY-W1 series module variants are shown in Table 36. Select the applicable ID.

Le présent émetteur radio IC: 8595A-JODYW164 / IC: 8595A-JODYW16407A / IC: 8595A-JODYW167 a été approuvé par ISED pour fonctionner avec les types d'antenne énumérés ci-dessous et ayant un gain admissible maximal. Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

The internal / external antenna(s) used for this module must provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

 The approval type for all the JODY-W1 series variants is a single modular approval. Due to ISED Modular Approval Requirements (Source: RSP-100 Issue 10), any application which includes the module must be approved by the module manufacturer (u-blox). The application manufacturer must provide design data for the review procedure.

7.4 Approved antennas

Refer to the JODY-W1 antenna reference design [3] for the specifications that must be fulfilled in the end product that uses radio type approval of the JODY-W1 module. The JODY-W1 antenna reference design provides PCB layout details and electrical specifications.

The approved antennas that can be connected to the JODY-W1 series module are described in this section.

7.4.1 Wi-Fi operation

For Wi-Fi operation in the 2.4 GHz band and Wi-Fi operation in the 5 GHz band, the JODY-W1 series module has been tested and approved for use with the antennas listed in Table 37.

Manufacturer	Part number	Antenna type	Peak gain [dBi]		Validated regulatory domain
			2.4 GHz band	5 GHz band	
Any	N/A	Dipole antenna	2	2	FCC/IC
Any	N/A	Dipole antenna	0	0	ETSI

Table 37: List of approved Wi-Fi antennas

 Important: To be compliant to FCC §15.407(a) the EIRP is not allowed to exceed 125 mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon when operated as an outdoor access point in U-NII-1 band, 5.150-5.250 GHz.

7.4.2 Bluetooth operation

For Bluetooth operation, the JODY-W1 series module has been tested and approved for use with the antennas listed in Table 38.

Manufacturer	Part number	Antenna type	Peak gain [dBi]		Validated regulatory domain
			2.4 GHz band	5 GHz band	
Any	N/A	Dipole antenna	2	2	FCC/IC
Any	N/A	Dipole antenna	0	0	ETSI

Table 38: List of approved Bluetooth antennas

7.5 Bluetooth qualification

 JODY-W1 series modules have been qualified as “Controller Subsystem” according to the Bluetooth 5.0 specification and are listed with the qualified design ID, QDID: 114915.

This means that there is no need for any further qualification if the module is combined with a host stack that is Bluetooth-qualified as “Host Subsystem”.

7.5.1 Bluetooth host stack

Several Bluetooth host stacks are available in the market. These host stacks are suited for different tasks and environments. These host stacks could differ based on their system requirements, supported Bluetooth profiles, cost, Bluetooth qualification, support and so on.

8 Product handling

8.1 Packaging

⚠ The information in this chapter is valid only for module variants that have been fully tested and approved during the Initial Production stage. The development status of JODY-W1 series modules is described in the [Document Information](#). For more information about packaging, see the u-blox Package information guide [1].

8.1.1 Reels

JODY-W1 series modules are delivered as hermetically sealed tape and reels, to enable efficient production, production lot set-up and tear-down.

JODY-W1 series modules are deliverable in quantities of 500 pieces on a reel. JODY-W1 series modules are shipped on reel Type A as described in the u-blox package information guide [1].

8.1.2 Tapes

Figure 20 shows the position and orientation of JODY-W1 modules as they are delivered on tape. The dimensions of the tapes are specified in Figure 22.

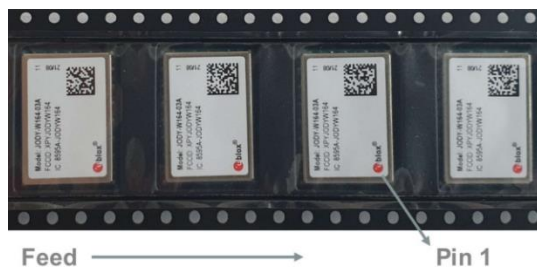
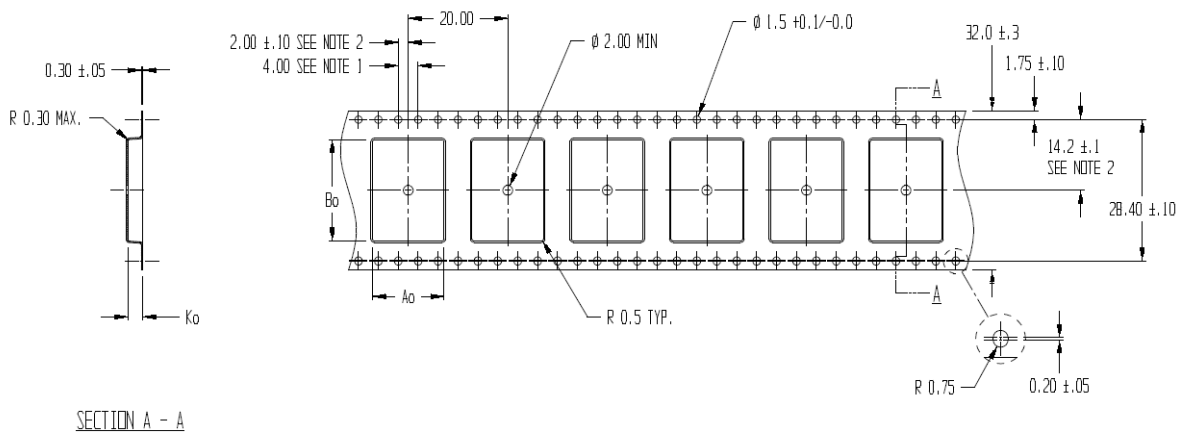


Figure 21: Orientation of JODY-W1 modules on tape



$A_0 = 14.4$
 $B_0 = 20.4$
 $K_0 = 3.0$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

Figure 22: JODY-W1 tape dimensions

8.2 Shipment, storage, and handling

For more information regarding moisture sensitivity levels, shipment, storage, and handling, see the u-blox Package Information Guide [1].

8.2.1 Moisture sensitivity levels

 JODY-W1 series modules are Moisture Sensitive Devices (MSD) in accordance with the IPC/JEDEC specification.

The moisture sensitivity levels (MSL) for JODY-W1 automotive and professional grade modules are 3 and 4 respectively. See moisture sensitive warning label on each shipping bag for detailed information.

After opening the dry pack, the modules with MSL 3 must be mounted within 168 hours in factory conditions of maximum 30 °C/60%RH or must be stored at less than 10%RH. The modules with MSL 4 must be mounted within 72 hours.

The modules require baking if the humidity indicator card shows more than 10% when read at 23±5°C or if the conditions mentioned above are not met. Please refer to J-STD-033B standard for the bake procedure.

8.2.2 Mounting process and soldering recommendations

Reflow profiles are to be selected according to u-blox recommendations. See JODY-W1 series System integration manual [2] for more information.

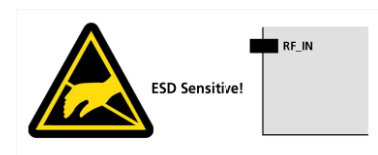
 Failure to observe these recommendations can result in severe damage to the device.

8.2.3 ESD handling precautions

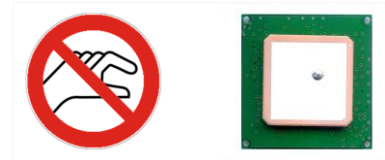
 JODY-W1 series modules are Electrostatic Sensitive Devices (ESD). Observe precautions for handling. Failure to observe these precautions can result in severe damage to the Wi-Fi receiver.

Wi-Fi transceivers are Electrostatic Sensitive Devices (ESD) that require special precautions to be observed during handling. To minimize the risk of damage caused by electrostatic charges, be sure to handle the patch antennas with care. In addition to standard ESD safety practices, the following measures should be observed when handling the receiver:

- Unless there is a galvanic coupling between the local GND (on the workbench or similar) and the PCB GND, then the first point of contact when handling the PCB must always be between the local GND and PCB GND.
- Be sure to ground the module before mounting an antenna patch.
- When handling the RF pin, avoid contact with any charged capacitors. Also be careful when contacting materials that can develop charges, like the patch antenna (~10 pF), coaxial cable (~50-80 pF/m), soldering iron, and so on.



- To prevent electrostatic discharge through the RF input, do not touch any exposed antenna area. If there is any risk that the exposed antenna area might be touched in non-ESD protected work areas, be sure to implement proper ESD protection measures in the application design.
- When soldering RF connectors and patch antennas to the RF pin of the receiver, be sure to use an ESD safe soldering iron (tip).



9 Labeling and ordering information

9.1 Product labeling

The labels displayed on JODY-W1 series include important product information.

Figure 23 shows the label applied to JODY-W1 series modules. Each of the given label references are described in Table 39.



Figure 23: JODY-W1 series sample label

Reference	Description
1	Text in bold font: "Model:" type number with the product version
2	Minor product version (xx)
3	Date of production encoded YY/WW (year/week)
4	FCC/ISED ID with which the module has been listed.
5	Data Matrix with unique serial number comprising 19 alphanumeric symbols: - The first 3 symbols are used for production tracking and are an abbreviated representation of the Type number that is unique to each module variant. - The following 12 symbols represent the unique hexadecimal Bluetooth address of the module AABCCDDEEFF, and - The last 4 symbols represent the hardware and firmware version encoded HHFF. See also Reserved MAC addresses .
6	u-blox logo with red dot to indicate the position of pin 1

Table 39: JODY-W1 series label description

9.2 Product identifiers

Table 40 describes the three product identifiers, namely the Type number, Model name and Ordering code.

Format	Description	Nomenclature
Model name	Describes the form factor, platform technology and platform variant. Used mostly in product documentation like this data sheet, the model name represents the most common identity for all u-blox products	PPPP-TGVV
Ordering code	Comprises the model name – with additional identifiers to describe the major product version and quality grade	PPPP-TGVV-TTQ
Type number	Comprises the model name and ordering code – with additional identifiers to describe minor product versions.	PPPP-TGVV-TTQ-XX

Table 40: Product code formats

Table 41 explains the parts of the product code.

Code	Meaning	Example
PPPP	Form factor	JODY
TG	Platform T – Dominant technology, For example, W: Wi-Fi, B: Bluetooth G – Generation	W1
VV	Variant based on the same platform; range [00...99]	64
TT	Major Product Version	00
Q	Quality grade A: Automotive B: Professional C: Standard	A
XX	Minor product version (not relevant for certification)	00

Table 41: Part identification code

9.3 Ordering information

Ordering code	Product
JODY-W163-13A	Automotive grade module based on CYW89359 transceiver, 2-antenna version, and RSDB operation on a single antenna. Support for 5 GHz MIMO. LTE filter for 2.4 GHz Wi-Fi. SDIO host interface.
JODY-W164-03A	Automotive grade module based on CYW89359 transceiver, 2-antenna version, and RSDB operation on a single antenna. Support for 5 GHz MIMO. PCIe host interface.
JODY-W164-13A	Automotive grade module based on CYW89359 transceiver, 2-antenna version, and RSDB operation on a single antenna. Support for 5 GHz MIMO. LTE filter for 2.4 GHz Wi-Fi. PCIe host interface.
JODY-W163-04A	Automotive grade module based on CYW89359 transceiver, 2-antenna version, and RSDB operation on a single antenna. No MIMO support. SDIO host interface.
JODY-W164-27A	Automotive grade module based on CYW88359 transceiver, 2-antenna version, and RSDB operation on a single antenna. No MIMO support. LTE filter for 2.4 GHz Wi-Fi. SDIO host interface.
JODY-W164-15A	Automotive grade module based on CYW88359 transceiver, 2-antenna version, and RSDB operation on a single antenna. No MIMO support. LTE filter for 2.4 GHz Wi-Fi. PCIe host interface.
JODY-W167-00A	Automotive grade module based on CYW88359 transceiver, 3-antenna version, and 2x2 MIMO. PCIe host interface.
JODY-W167-03A	Automotive grade module based on CYW89359 transceiver, 3-antenna version, and 2x2 MIMO. PCIe host interface.

Table 42: Product IDs and ordering codes

 Product changes affecting form, fit, or function are documented by u-blox. For a list of Product Change Notifications (PCNs) see our website.

Appendix

A Glossary

Abbreviation	Definition
AC	Alternating current
BT	Bluetooth
CMD	Command
DC	Direct current
DDR	Double data rate
ESD	Electrostatic sensitive devices
FCC	Federal Communications Commission
FIFO	First in, First out
GI	Guard interval
GND	Ground
GPIO	General-purpose input/output
HD	High definition
HCI	Host controller interface
ISED	Innovation, Science and Economic Development Canada
ISM	Industrial, scientific and medical
LE	Low energy
LTE	Long Term Evolution
LULA	Limited use license agreement
MAC	Medium access control
MIMO	Multiple input multiple output
MWS	Mobile Wireless Standards
MSL	Moisture sensitivity level
NFC	Near-Field Communication
OEM	Original equipment manufacturer
P2P	Peer-to-peer
P2P (GC)	P2P Client
P2P (GO)	P2P Group Owner
PCB	Printed circuit board
PCI	Peripheral component interconnect
PCIe	PCI Express
PCN	Product change notification
PCM	Pulse-code modulation
POR	Power-on reset
RED	Radio Equipment Directive
RF	Radio frequency
RSDB	Real simultaneous dual band
RSS	Radio Standards Specification
RH	Relative humidity
RoHS	Restriction of Hazardous Substances
SAR	Specific absorption rate
SCO	Synchronous connection-oriented

Abbreviation	Definition
SDIO	Secure digital input output
SDR	Single data rate
SISO	Single-input single-output
SMD	Surface-mount device
STA	Station
TBD	To be defined
USB	Universal serial bus
UART	Universal Asynchronous Receiver/Transmitter
VSDB	Virtual simultaneous dual band
WAPI	WLAN Authentication and Privacy Infrastructure
WLAN	Wireless local area network

Table 43: Explanation of the abbreviations and terms used

Related documents

- [1] u-blox package information guide, [UBX-14001652](#)
- [2] JODY-W1 series system integration manual, [UBX-15024929](#)
- [3] JODY-W1 antenna reference design, [UBX-18017767](#)
- [4] JODY-W1 reflow mounted upside down, information note, [UBX-18021974](#)
- [5] Radio Equipment Directive; ec.europa.eu/growth/sectors/electrical-engineering/red-directive;
July 2017

 For product change notifications and regular updates of u-blox documentation, register on our website, www.u-blox.com.

Revision history

Revision	Date	Name	Comments
R01	11-Jul-2016	vdyk	Initial release.
R02	2-Nov-2016	vdyk, ishe, este, kgom	Removed support for USB interface (section 2.5). Modified the block diagram of JODY-W165 and Pin assignment (Figure 17), and Physical dimensions (Figure 18). Updated the key features (Table 1), module configuration (Table 5), and pin description of JODY-W1 series (Table 19).
R03	29-Nov-2016	mhei, ddie	Updated Figure 16.
R04	2-Mar-2017	ddie, ishe, kgom	Removed reference to JODY-W165 (Professional grade with 2 antenna pins) and included JODY-W167-A (Automotive grade with 3 antenna pins) product variant. Updated Table 1. Included information about supported RSDB and MIMO configurations (section 1.5). Corrected pin names (Figure 16). Removed Reset configuration section. Updated FCC and IC IDs (section 7.3) and ordering codes (section 9.3). Replaced document status with disclosure restriction.
R05	4-May-2017	ddie, ishe, mzes, kgom	Added JODY-W164-A product variant and included block diagram, FCC/IC ID, ordering code for this variant. Updated section 1.1 and Table 1. Included information about Extended operation mode configuration (section 2.1). Updated product description (1.1). Updated Figure 9 and Figure 10. Corrected pin names (Figure 18). Included detailed pin description for antenna pins. Updated Mechanical specification (section 6). Updated FCC and IC IDs (section 7.3) and ordering codes (section 9.3).
R06	08-Sep-2017	mzes, ishe, shoe, ddie	Updated support for 802.11 standards (section 1.8.1). Added information about PCIe pins in Table 21. Included information about RED certification (section 7.2). Added information about JODY-W164-07A. Updated JODY-W164-A block diagram (Figure 1). Added support for RSDB over SDIO.
R07	23-Feb-2018	ddie, mhei, mzes, kgom	Removed the product variant - JODY-W165-A and modified the product status for most of the variants to Engineering Sample in the last table on page 2. Removed support for UART H5 (section 2.4). Updated Pin definition table (Table 24), added Wi-Fi and Bluetooth current consumption specifications (Table 29, Table 30, and Table 31). Included a note with respect to temperature derating in section 4.2. Updated the mechanical specifications (Figure 20). Updated Approvals (section 7.1). Updated the product label drawing in Section 9.1 and corrected the data matrix code content (section 9.1).
R08	5-Mar-2018	mhei, kgom	Updated section 1.1, Table 1 and pin assignment (top view) (Figure 18).
R09	29-Mar-2018	kgom	Updated Table 1. Included footnote related to support of SDIO interface for Automotive grade variants only.
R10	6-Jul-2018	ishe, mzes, ddie, mhei	Updated Table 1, Table 28 and Table 29. Added product variants - JODY-W163-04A, JODY-W163-05A, JODY-W163-13A, and JODY-W167-00B. Removed all references to some of the product variants that have been removed. Updated the product description for JODY-W167(-A). Updated support of a single host interface only (SDIO or PCIe) per product variant. Updated the chipset information. Major updates in Approvals section (standards references, approved antennas, Bluetooth qualification). Added Table 40. Updated the current consumption for Wi-Fi power-save modes (Table 30). Added information on the permitted number of reflow processes for JODY-W164-04A and the reference to the related Information Note [4].
R11	27-Sep-18	mzes	Updated supported Wi-Fi operation modes in section 1.6. Removed soldering profile in section 8.2.2 and provided reference to JODY-W1 System integration manual instead. Added new FCC/IC IDs in Table 36 and Table 40. Added Bluetooth QDID in section 7.5.
R12	14-Dec-18	mzes, kgom	Updated the product status for JODY-W163-A and JODY-W164-A to Initial Production. Updated the country certifications (sections 1.8.4 and 7.3.1). Included moisture sensitivity level for professional grade modules (section 8.2.1). Fixed a formatting error in Table 31.
R13	19-Mar-19	lber	Updated Table 1. Added information about LTE band support for LTE coexistence bandpass filter in section 1.5 and LTE Coexistence performance (section 0).

Revision	Date	Name	Comments
R14	13-May-19	mzes, kgom	Added new product variants - JODY-W164-13A and JODY-W164-15A. Updated FCC/ISED certification status in section 7.3.
R15	10-Jul-19	mhei	Updated the product status for JODY-W163-13A, JODY-W164-13A, JODY-W164-15A and JODY-W167 to Initial Production. Removed the footnotes/notes related to pending approvals in sections 7.2 and 7.3.1 respectively. Included information about position and orientation of JODY-W1 modules in section 8.1.2. Made a few minor changes in section 9.1.
R16	22-Oct-2019	mzes, este, kgom	Added Product selection guidelines in section 1.6. Removed the product variant - JODY-W167-00B. Updated Table 1.
R17	22-Nov-2019	mhei	Changed product status for JODY-W164-03A-01 to mass production.
R18	23-Apr-2020	mzes, mhei	Replaced product variant JODY-W164-07A with JODY-W164-27A. Added reserved MAC addresses in section 1.8.5. Removed LTE/MWS coexistence interface from supported features. Replaced ISO 60950 with EN 62368 and updated EN 300 328 to V2.2.2 in section 7.2. Defined Bluetooth transmit output power for BDR, EDR and BLE in section 4.6.1.
R19	5-Feb-2021	mzes, frca	Updated mechanical specifications (Figure 20) and broadened document scope to include other product variants in Document information, page 2.
R20	28-May-2021	mzes	Updated product status and removed product variants JODY-W163-05A, JODY-W164-04A, and JODY-W164-05A (following End of Life announcement) from Document information . Revised Labeling and ordering information .

Contact

For complete contact information, visit us at www.u-blox.com.

u-blox Offices

North, Central and South America

u-blox America, Inc.

Phone: +1 703 483 3180
E-mail: info_us@u-blox.com

Regional Office West Coast:

Phone: +1 408 573 3640
E-mail: info_us@u-blox.com

Technical Support:

Phone: +1 703 483 3185
E-mail: support@u-blox.com

Headquarters

Europe, Middle East, Africa

u-blox AG

Phone: +41 44 722 74 44
E-mail: info@u-blox.com
Support: support@u-blox.com

Asia, Australia, Pacific

u-blox Singapore Pte. Ltd.

Phone: +65 6734 3811
E-mail: info_ap@u-blox.com
Support: support_ap@u-blox.com

Regional Office Australia:

Phone: +61 3 9566 7255
E-mail: info_au@u-blox.com
Support: support_ap@u-blox.com

Regional Office China (Beijing):

Phone: +86 10 68 133 545
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Chongqing):

Phone: +86 23 6815 1588
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Shanghai):

Phone: +86 21 6090 4832
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office China (Shenzhen):

Phone: +86 755 8627 1083
E-mail: info_cn@u-blox.com
Support: support_cn@u-blox.com

Regional Office India:

Phone: +91 80 405 092 00
E-mail: info_in@u-blox.com
Support: support_in@u-blox.com

Regional Office Japan (Osaka):

Phone: +81 6 6941 3660
E-mail: info_jp@u-blox.com
Support: support_jp@u-blox.com

Regional Office Japan (Tokyo):

Phone: +81 3 5775 3850
E-mail: info_jp@u-blox.com
Support: support_jp@u-blox.com

Regional Office Korea:

Phone: +82 2 542 0861
E-mail: info_kr@u-blox.com
Support: support_kr@u-blox.com

Regional Office Taiwan:

Phone: +886 2 2657 1090
E-mail: info_tw@u-blox.com
Support: support_tw@u-blox.com