


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE




14.28XN+25.48  
14.28XN+14.28  
14.28X(N-1)

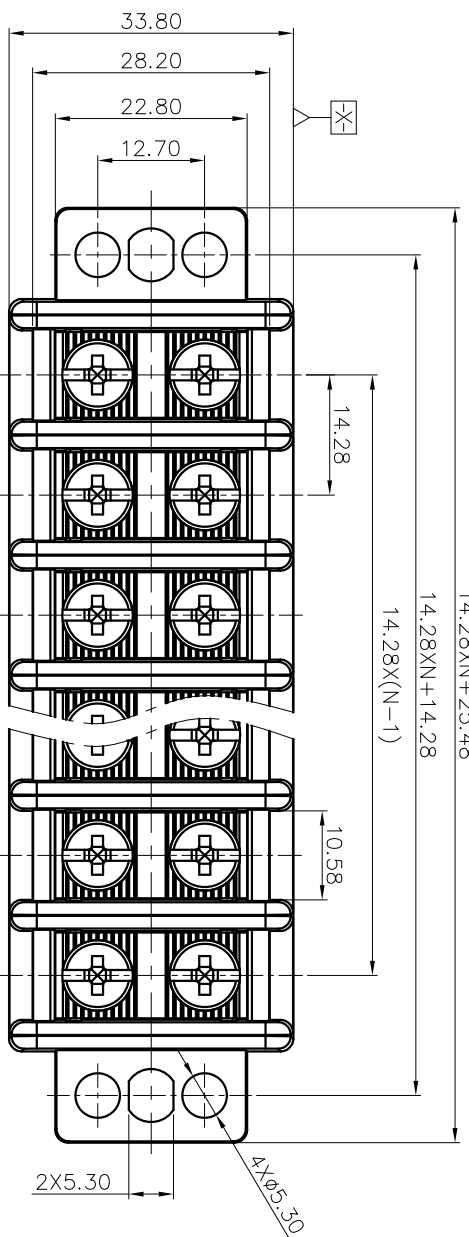

- NOTES1:  
UL Standard  
1. Rated voltage/current : 600V / 30A  
2. Torque value : M4 , 10.53lb.in  
3. Wire range : 10~22AWG
- NOTES2:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 14.28mm, Poles : N=02~13P  
3. Withstanding voltage : AC2200V/1Min  
4. Operating temperature: -40°C~+125°C  
5. Undimensioned tolerances:

Pitch Range in mm	Nominal Dimension		Range		D
	Over	Under	Over	Under	
6	TO	TO	60	100	0.1/10
10	TO	TO	100	150	<
24	TO	TO	60	100	±1.30
30	TO	TO	100	150	±2*
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
					±1.30

6. RoHS Compliance

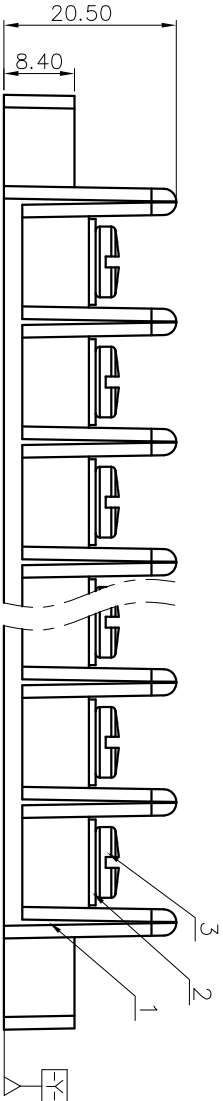

DG98-A - XXP - 1Y - 00A (H)  
(RoHS)  
00A - (Standard)  
(Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)  
2. (Blue)  
3. (Black)  
4. (Green)  
5. (Orange)  
6. (Red)  
7. (Transparent)  
8. (Yellow)  
9. (White)

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	M4/Zn Plated
2	Current carrier	Copper alloy	M4/Sn Plated
1	Housing	PC	UL94V-0

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

APPD: DG98-A-XXP-1Y-00A(H)

DETACHED LISTS			
PART NO.:	APPD:	DRFT:	TITLE:
/		NICK 2016.04.02	CUSTOMER DRAWING
DRAWING NO.:	CHKD:	THIRD ANGLE PROJECTION	REV
DG98-C01			TO
SCALE	SHEET	DO NOT SCALE DRAWING	SCALE
1:1	1/1		1:1