
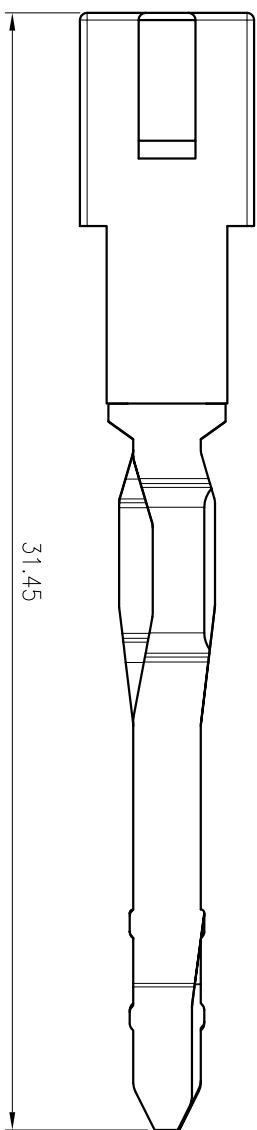



公差/General Tolerances(mm)		0.1/10
0	>3	~
>3	>6	~
>6	>10	~
>10	>18	~
>18	>30	~
>30	>50	~
>50	>80	~
>80	>120	~
>120	>180	~
>180	>250	~
>250	>315	~
>315	>400	~
>400	>500	~
>500	>1000	~
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50		±Z

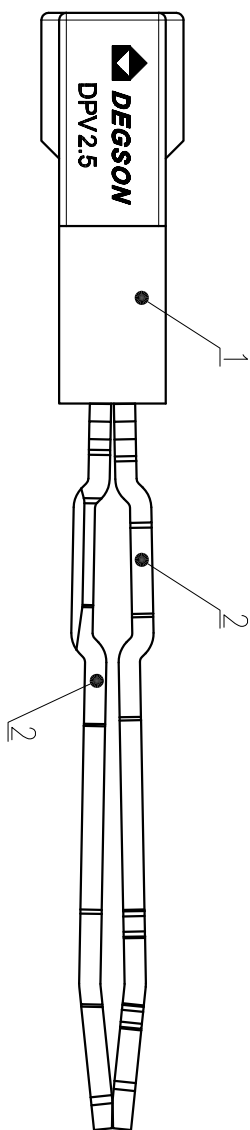

2	Current carrier	Copper	Sn Plated
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准	UL Standard:	B	C
额定电压/电流/Rated Voltage(V)/Current(A)		/	/
EC 标准/EC Standard:		/	/
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)		/	/
使用温度范围/Operating Temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: / SURFACE: /

MAT NO.: /  
 STATUS: /  
 APPD: LI GL 2020.06.02  
 CHKD: Moo J 2020.06.02  
 DRFT: Xico SP 2017.11.27

NAME: **DEGSON** 宁波高松电子有限公司  
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DPV2.5-C01  
 TYPE: CUSTOMER DRAWING  
 SCALE: 5:1  
 REV: D0-2  
 SHEET: 1/1

REV	ECN	DESCRIPTION	DRFT	DATE

REV	ECN	DESCRIPTION	DRFT	DATE

SIZE: A4  
 mm  
 (inch)