
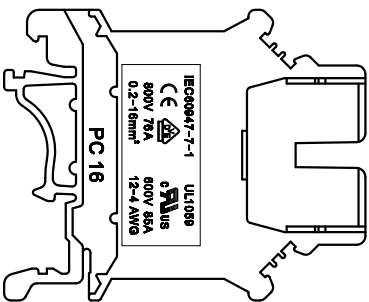

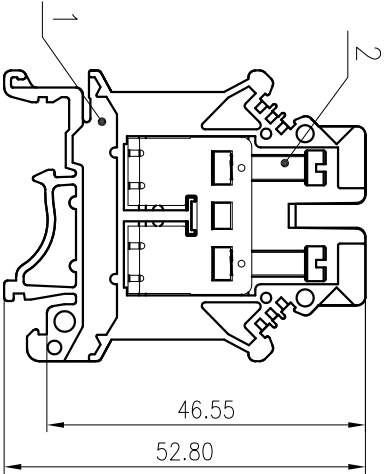


尺寸公差/General tolerances(mm)													D 0.1/10
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
~	~	~	~	~	~	~	~	~	~	~	~	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500	
±0.12 ±0.18 ±0.22 ±0.28 ±0.31 ±0.37 ±0.45 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50												±Z	

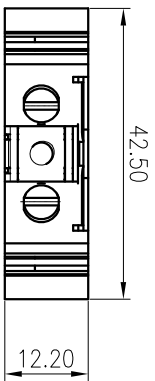

2	Hardware	Copper Alloy	Ni plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/Rated Voltage(V)	Current(A)	600/85	600/85
IEC 标准/IEC Standard:	过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	/
额定电压/电压/Rated Voltage(V)/Current(A)	800/76	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8.0	/	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M4: 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~16/	10-12(So/Str)&4-8(Str)	
间距/Pitch(mm)	12.20		
剥线长度/Stripping length(mm)	12-13		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number:	/		
PANTONE / RAL	/		

MATERIAL: SURFACE:

MAT NO.: /  
STATUS: /  
APPD: L J 2020.06.04  
CHKD: Mgo J 2020.06.04

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: PC16-001  
TYPE: CUSTOMER DRAWING  
SCALE: 1:1  
REV TO  
1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
-----	-----	-------------	-------	------

1 2 3 4 5 6