
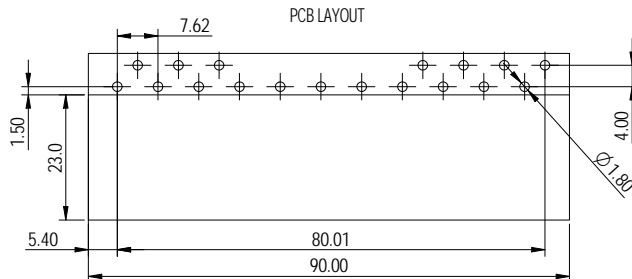
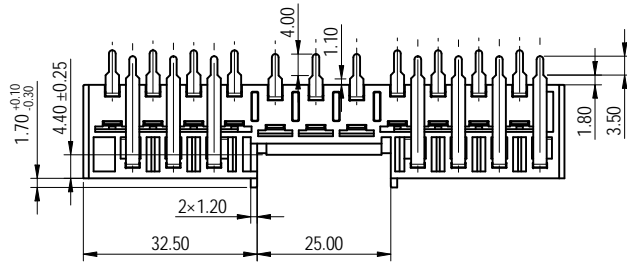
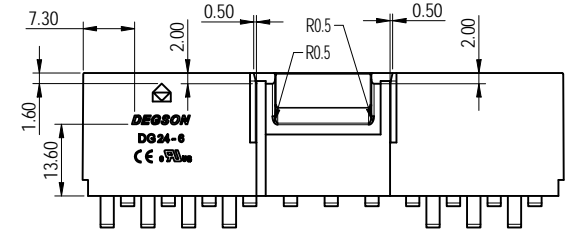

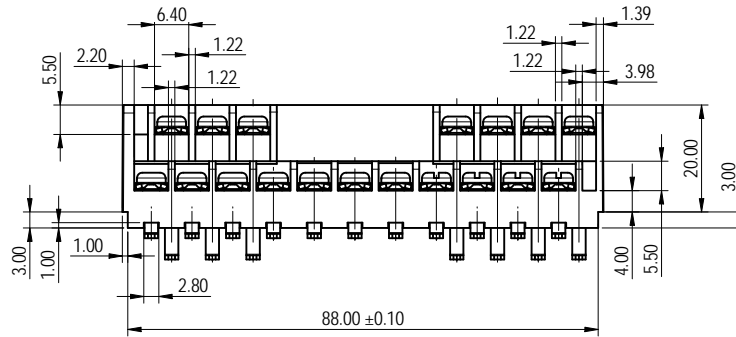
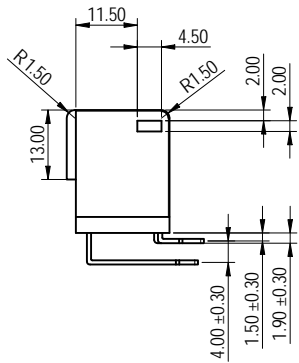


公差/General tolerances (mm)													D	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	N
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

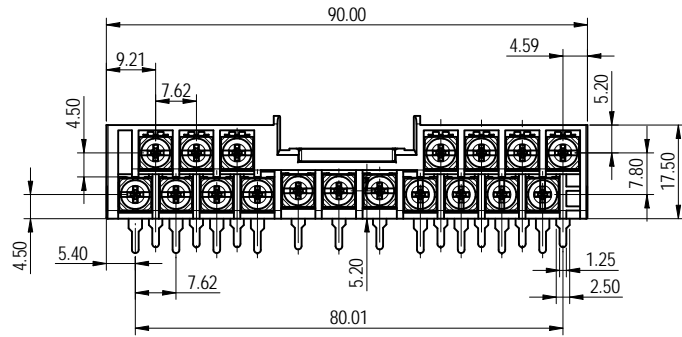

ITEM	NAME OF PART	MATERIAL	NOTES
4	Screw	Steel	M3/Ni Plated
3	Pin header2	Copper alloy	Sn Plated
2	Pin header1	Copper alloy	Sn Plated
1	Housing	PBT+GF	UL94V-0

UL 标准/UL Standard	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/10	/	300/10
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.49~1.0/ 4.4~9.0		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)	24~14		
线数范围/Poles	N=18P		
剥线长度/Stripping length(mm)	6~7		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL:		SURFACE/COLOR:	
APPD: 蓝美凡	2023.06.14	NAME:	
CHKD: 曹利影	2023.06.14	MAT NO./REV:	/ 00
DRFT: 孙科豪	2023.06.14	MAT STATUS:	批量

DRAWING NO. 200126500					TYPE CUSTOMER DRAWING					DRAWING STATUS 已发布					SCALE 1:1					SHEET 1/1				
-----------------------	--	--	--	--	-----------------------	--	--	--	--	--------------------	--	--	--	--	-----------	--	--	--	--	-----------	--	--	--	--

REV	ECN	DESCRIPTION	DRFT	DATE
00				

Transfer or duplication of this document as well as the utilization of its contents without the written consent of DEGSON is prohibited. 未经授权复制或传播本文件及其内容，或在本文件内容的基础上进行二次开发，均属于侵权行为，公司将依法追究。 All rights reserved for patent.