STRADA-IP-2X6-SCL

Type II/III (long) beam for very wide pole to pole distances. Ideal for pedestrian walkways and residential road lighting. (EN13201 P-classes)

TECHNICAL SPECIFICATIONS:

Dimensions 173.0 x 71.4 mm

Height 9.6 mm

Fastening screw

Ingress protection classes IP67

ROHS compliant yes 1



MATERIAL SPECIFICATIONS:


Component	Туре	Material	Colour	Finish
STRADA-IP-2X6-SCL	Multi-lens	PMMA	clear	
2X6-SEAL25	Seal	Silicone	white	

ORDERING INFORMATION:

» Box size: 476 x 273 x 247 mm

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CS15418_STRADA-IP-2X6-SCL	Multi-lens	120	40	40	7.9



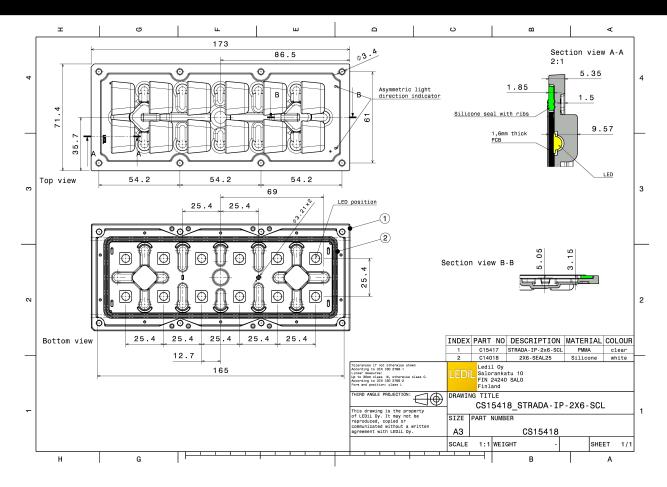


See also our general installation guide: www.ledil.com/installation_guide



LED Bridgelux SMD 5050

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White


Required components:



COMET

LED QUICK FLUX 2x6 LED XG xxx G7+

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White




CREE \$\text{LED}

Required components:

LED XM-L

FWHM / FWTM Asymmetric

Efficiency %
LEDs/each optic 1
Light colour White
Required components:




CREE - LED


Required components:

LED XP-G2

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White




PHOTOMETRIC DATA (MEASURED):

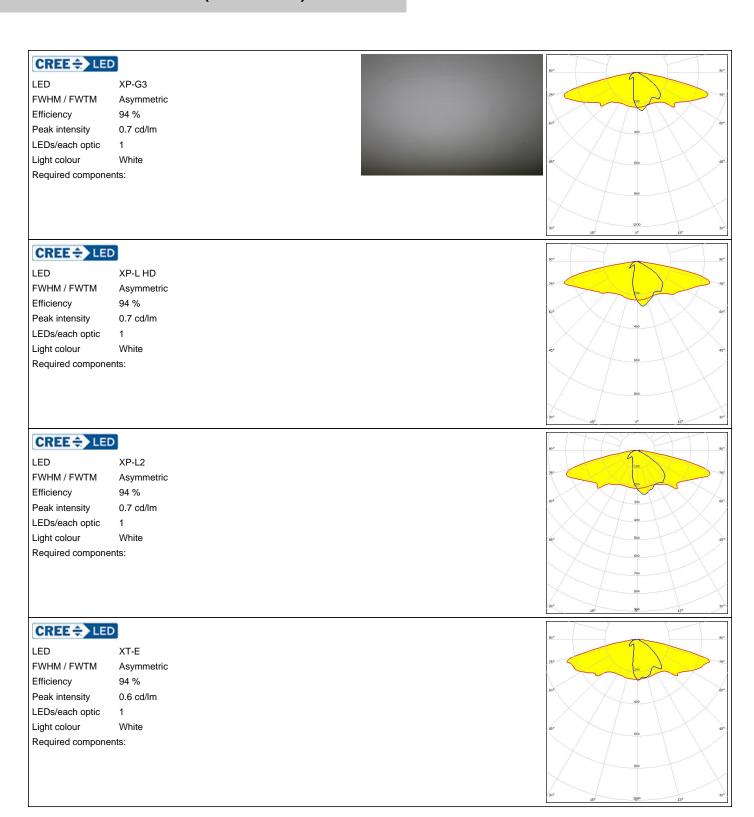

CREE \$\text{LED}

LED XT-E HE
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White




MUMILEDS

Required components:


LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:



MUMILEDS

LED LUXEON T
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White




MILEDS

Required components:

Required components:


LED LUXEON V
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White



PHOTOMETRIC DATA (MEASURED):




LED LUXEON V2
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



Your solutions

LED RecLED 146x45mm 2900lm 730 STRADA-IP-2x6 G1

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:




WNICHIA

LED NVSW219D
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

WNICHIA

Required components:


LED NVSW219F
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:






WNICHIA

LED NVSW319B
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



WNICHIA

LED NVSW3x9A
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:




WNICHIA

LED NVSW519A
FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:




LED NVSxx19B/NVSxx19C

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

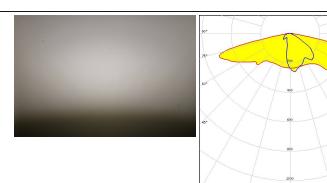

OSRAM

LED Duris S8
FWHM / FWTM Asymmetric
Efficiency 95 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White




PHILIPS

Required components:

LED Fortimo FastFlex LED 2x6 DP G4


FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x6 DP G5


FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



PHILIPS

LED Fortimo FastFlex LED 2x6 DP HE

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:




PHOTOMETRIC DATA (MEASURED):

PHILIPS

LED Fortimo FastFlex LED 2x6 DPX G4

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LED HILOM RH12 (LH351C)

FWHM / FWTM Asymmetric


Efficiency 94 %

Peak intensity 0.7 cd/lm

LEDs/each optic 1

Light colour White

Required components:




SAMSUNG

LED HiLOM RM12 ZP (LH502C)

FWHM / FWTM Asymmetric
Efficiency 96 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White


Required components:




SCIOLUX


LED ROY-S26XPL2 (XP-L2)

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



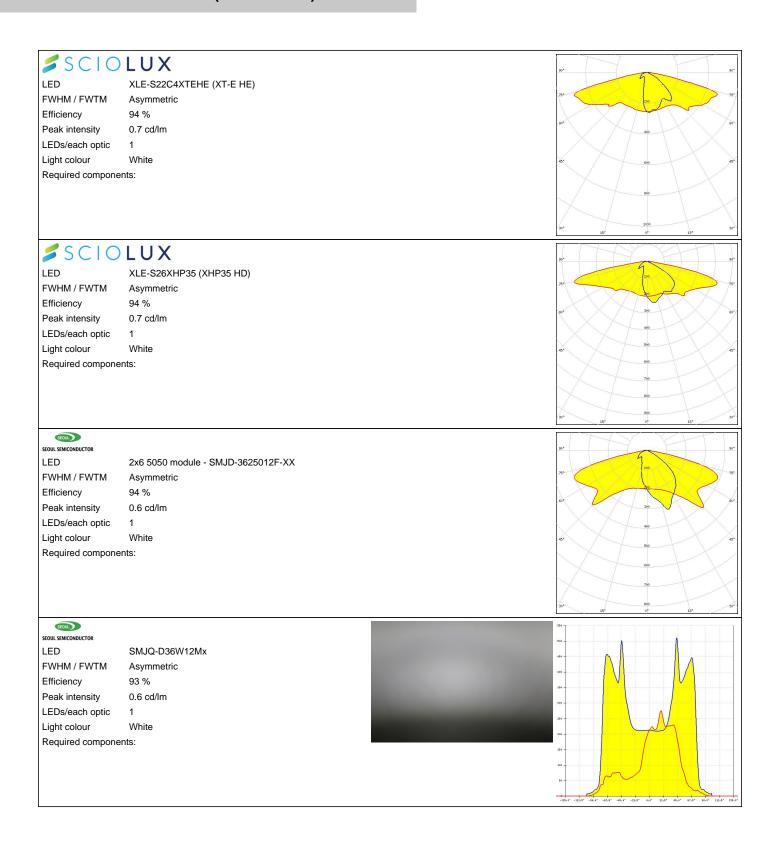



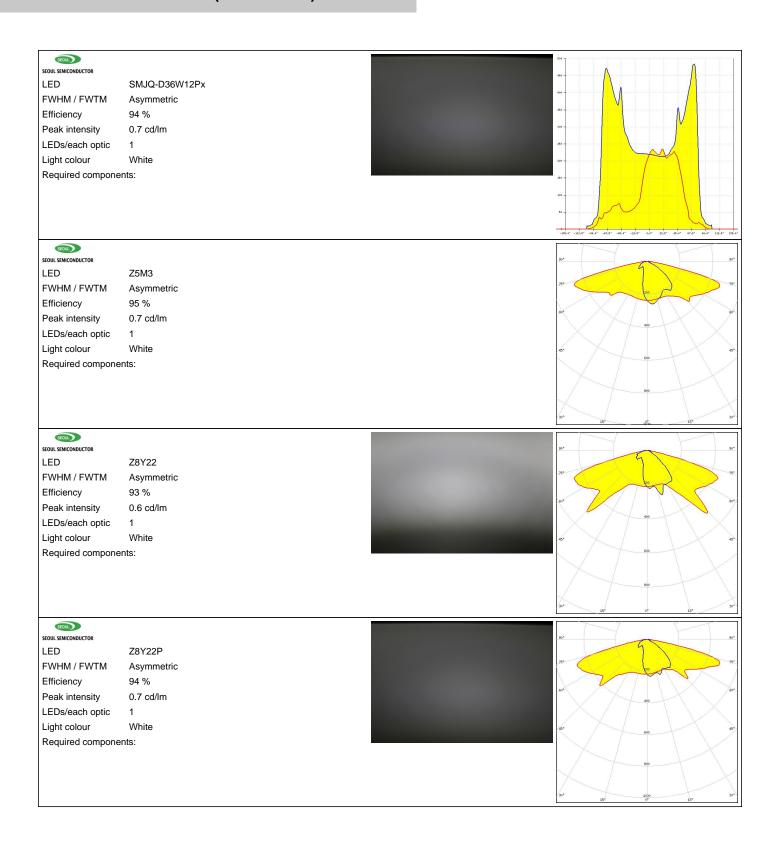


PHOTOMETRIC DATA (MEASURED):

TRIDONIC

LED RLE 2x6 3000lm HP EXC2 OTD

FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:




PHOTOMETRIC DATA (SIMULATED):

CREE \$\text{LED}

LED J Series 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:




CREE \$\(\phi\) LED

LED J Series 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White


Required components:



CREE + LED

LED XHP35 HD
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.5 cd/lm


LEDs/each optic 1
Light colour White
Required components:



CREE - LED

LED XP-G2 HE
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1

Light colour White Required components:




PHOTOMETRIC DATA (SIMULATED):



LED LUXEON 5050 Round LES

FWHM / FWTM Asymmetric
Efficiency 80 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Protective plate, glass




LUMILEDS

LED LUXEON 5050 Square LES

FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:




LUMILEDS

LED LUXEON 5050 Square LES


FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:



WNICHIA


LED NFMW48xA
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:





LED NV4WB35AM
FWHM / FWTM Asymmetric
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White


Required components:



WNICHIA

LED NV4x144A
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White


Required components:



WNICHIA

LED NVSxE21A
FWHM / FWTM Asymmetric
Efficiency 90 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White


Required components:



OSRAM

LED PrevaLED Brick HP IP 2x6

FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:




OSRAM

LED OSCONIQ P 3030 FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 0.6 cd/lm

LEDs/each optic Light colour White

Required components:




OSRAM

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric Efficiency 92 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour

Required components:




OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric Efficiency 92 % Peak intensity 0.6 cd/lm LEDs/each optic 1 Light colour White


Required components:



OSRAM

LED OSLON Square CSSRM2/CSSRM3


FWHM / FWTM Asymmetric 92 % Efficiency Peak intensity 0.6 cd/lm LEDs/each optic White Light colour Required components:




OSRAM

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White






SAMSUNG

LED LH181B
FWHM / FWTM Asymmetric
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White


Required components:



SAMSUNG


LED LH351B
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:



SAMSUNG

LED LH351C
FWHM / FWTM Asymmetric
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:



SAMSUNG

LH351D

FWHM / FWTM

Asymmetric

Efficiency

92 %

Peak intensity


0.6 cd/lm

LEDs/each optic

Light colour

White

Required components:



SEOUL SEOUL SEMICONDUCTOR

LED

SEOUL DC 3030C

FWHM / FWTM

Asymmetric

Efficiency

93 %


Peak intensity

0.6 cd/lm

LEDs/each optic Light colour

1 White

Required components:



SEOUL

LED

SEOUL DC 5050 6V

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$

Asymmetric

Efficiency

93 %


Peak intensity

0.5 cd/lm

LEDs/each optic Light colour

1 White

Required components:



SEOUL SEOUL SEMICONDUCTOR

LED FWHM / FWTM Z5M1/Z5M2

Efficiency

Asymmetric 93 %


Peak intensity

0.7 cd/lm

LEDs/each optic Light colour

White

Required components:




PHOTOMETRIC DATA (SIMULATED):



LED Z5M4
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White

LEDs/each optic 1
Light colour White
Required components:



SEOUL SEMICONDUCTOR

LED Z8Y22T
FWHM / FWTM Asymmetric
Efficiency 91 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy