

◆ Features

Extra low impedance with temperature range $-55\sim+105^{\circ}\text{C}$

Impedance 40~60% less than HLZ series

RoHS & REACH compliant, Halogen-free



◆ Specifications

Temperature: $-55 \sim +105^{\circ}\text{C}$

Load life: 1000 ~ 3000 hrs.

Voltage: 6.3 ~ 50V DC


Capacitance: 4.7 ~ 4700 μF

Tolerance: $\pm 20\%$ at 120Hz, 20°C


Size: 4x5.8, 5x5.8, 6.3x5.8, 6.3x7.7, 8x10.5, 10x10.5, 10x13.5,
12.5x13.5, 12.5x16, 16x16.5

◆ Drawing of HKZ Series

($\varnothing 4\sim\varnothing 6.3\times 7.7$) Unit: mm

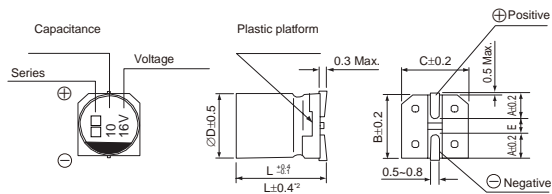

($\varnothing 8\times 10.5\sim\varnothing 16$) Unit: mm

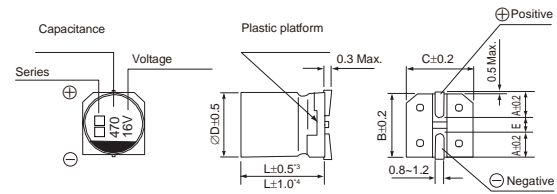

1. Voltage mark for 6.3V is [6V]
2. Applicable to $\varnothing 6.3\times 7.7$
3. Applicable to $\varnothing 8\times 10.5\sim\varnothing 10$
4. Applicable to $\varnothing 12.5\sim\varnothing 16$