

3W/5W, AC-DC converter



UL US CE CB RoHS



FEATURES

- Universal Input : 85 - 264VAC/100 - 370VDC
- Operating temperature range: -40°C to +70°C
- High isolation voltage up to 4K VAC
- Regulated output, Low ripple & noise
- Output short circuit, over-current, over-voltage protection
- High efficiency, high reliability
- Plastic case, meets UL94V-0
- EMI performance meets CISPR32 / EN55032 CLASS B
- IEC62368, UL62368, EN62368 approval

LDE03/05-20Bxx Series— a compact size power converter offered by Mornsun. It features universal input voltage, taking both DC and AC input voltage, low power consumption, high reliability, safer isolation.

Note: Please refer to Design Reference when module being used in a bad EMC environment.

Selection Guide

Certification	Model	Output Power	Nominal Output Voltage and Current (Vo/Io)	Efficiency (230VAC/%, Typ.)	Max. Capacitive Load (uF)	
UL/CE/CB	LD03-20B03-C	2.3W	3.3V/700mA	65	6000	
	LD03-20B05-C		5V/600mA	72	6000	
	LD03-20B09-C		9V/330mA	74	1500	
	LD03-20B12-C		12V/250mA	75	1500	
	LD03-20B15-C		15V/200mA	75	1000	
	LD03-20B24-C		24V/125mA	77	330	
		LD05-20B03-C	3.3W	3.3V/1000mA	67	5000
		LD05-20B05-C		5V/1000mA	74	5000
		LD05-20B09-C		9V/560mA	76	1200
		LD05-20B12-C		12V/420mA	78	1200
		LD05-20B15-C		15V/330mA	78	1000
		LD05-20B24-C		24V/210mA	80	330

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	85	--	264	VAC
	DC input	100	--	370	VDC
Input frequency		47	--	63	Hz
Input current	LD03	115VAC	--	80	mA
		230VAC	--	50	
	LD05	115VAC	--	130	
		230VAC	--	80	
Inrush current	115VAC	--	10	--	A
	230VAC	--	20	--	
Leakage current		0.1mA RMS typ. 230VAC/50Hz			
Recommended External Input Fuse		1A/250V, slow fusing, necessary			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	3.3V output	--	±3	--	%
	Others	--	±2	--	
Line Regulation	Full load	--	±0.5	--	
Load Regulation	0%-100% load	--	±1	--	

Ripple & Noise*	20MHz bandwidth (peak-peak value)	--	50	100	mV	
Temperature Drift Coefficient		--	±0.02	--	%/°C	
Short Circuit Protection		Continuous, self-recovery				
Over-current Protection	LD03	≥ 150% Io self-recovery				
	LD05	≥ 120% Io self-recovery				
Over-voltage Protection	3.3/5VDC output	≤ 7.5VDC				
	9VDC output	≤ 15VDC				
Over-voltage Protection	12/15VDC output	≤ 20VDC				
	24VDC output	≤ 30VDC				
Min. Load		0	--	--	%	
Power-off Holding Time	LD03	115VAC input	--	10	--	ms
		230VAC input	--	60	--	
	LD05	115VAC input	--	5	--	
		230VAC input	--	50	--	

Note: *Parallel line test method is adopted to test the ripple and noise, please see *AC-DC Converter Application Notes* for specific operation methods.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Isolation Voltage	Input-output	4000	--	--	VAC	
Operating Temperature		-40	--	+70	°C	
Storage Temperature		-40	--	+105		
Storage Humidity		--	--	95	%RH	
Welding Temperature	Wave-soldering	260 ± 5°C; time: 5 - 10s				
	Manual-welding	360 ± 10°C; time: 3 - 5s				
Switching Frequency		--	100	--	kHz	
Power Derating	LD03	-40°C to -25°C	1.0	--	--	% / °C
		+55°C to +70°C	1.0	--	--	
	LD05	-40°C to 0°C	1.13	--	--	
		+55°C to +70°C	3.0	--	--	
LD05	85 - 100VAC	1.0	--	--	%/VAC	
Safety Standard		IEC62368/UL62368/EN62368				
Safety Certification		IEC62368/UL62368/EN62368				
Safety Class		CLASS II				
MTBF		MIL-HDBK-217F@25°C > 300,000 h				



Physical Specifications

Casing Material	Black flame-retardant and heat-resistant plastic (UL94V-0)
Package Dimensions	37.00*24.50*18.00 mm
Weight	25g(Typ.)
Cooling method	Free air convection





EMC Specifications

EMI	CE	CISPR32/EN55032	CLASS A	
		CISPR32/EN55032	CLASS B (See Fig. 2 for recommended circuit)	
	RE	CISPR32/EN55032	CLASS A	
		CISPR32/EN55032	CLASS B (See Fig. 2 for recommended circuit)	
EMS	ESD	IEC/EN61000-4-2	Contact ± 6 KV/Air ± 8 KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	± 2 KV (See Fig. 1 for typical application circuit)	perf. Criteria B
		IEC/EN61000-4-4	± 4 KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ± 1 KV (See Fig. 1 for typical application circuit)	perf. Criteria B
		IEC/EN61000-4-5	line to line ± 2 KV/line to ground ± 4 KV (See Fig. 2 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	perf. Criteria A
Voltage dips, short interruptions and voltage variations immunity		IEC/EN61000-4-11	0%,70%	perf. Criteria B

Product Characteristic Curve

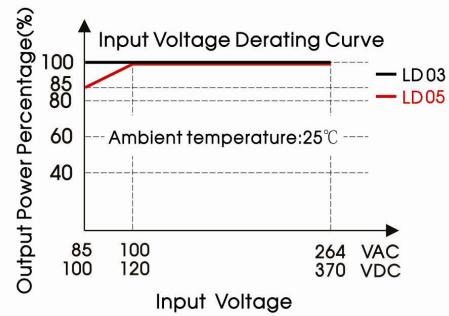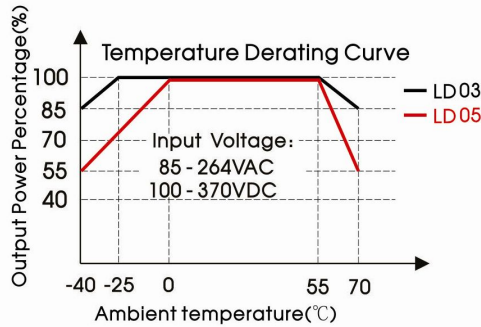

Note: ①When input 85-100VAC/100-120VDC, it need to be voltage derated on basis of temperature derating;
②This product is suitable for use in natural air cooling environments, if in a closed environment, please contact our company's FAE.

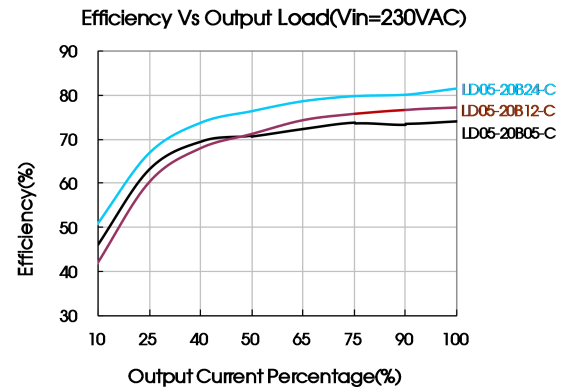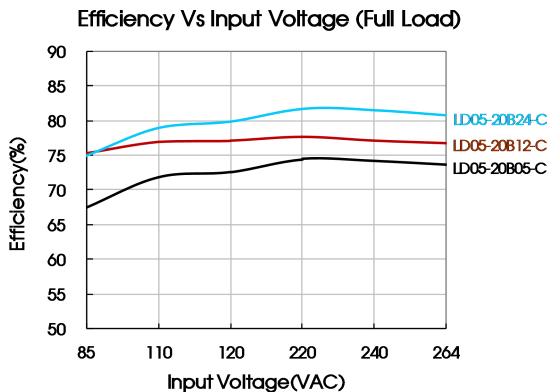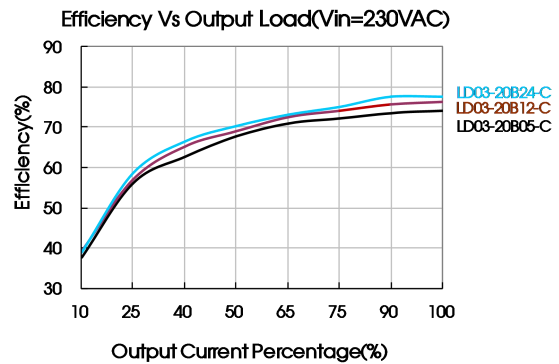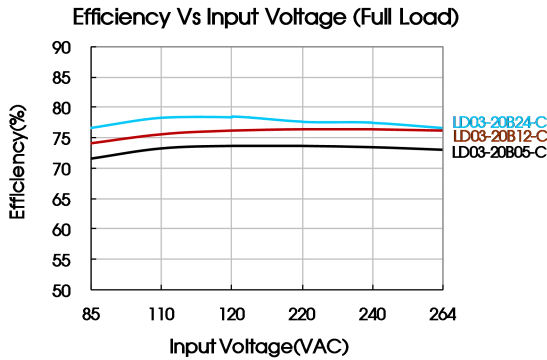

Design Reference

1. Typical application circuit

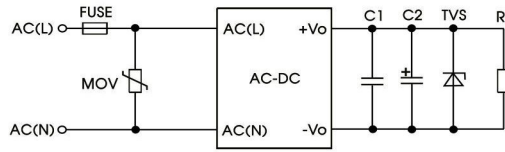


Fig. 1: Typical application circuit

Model	C1(μF)	C2(μF)	FUSE	MOV	TVS tube
LD03/05-20B03-C	1	150	1A/250V, slow fusing, necessary	S14K350	SMBJ7.0A
LD03/05-20B05-C		150			SMBJ7.0A
LD03/05-20B09-C		120			SMBJ12A
LD03/05-20B12-C		120			SMBJ20A
LD03/05-20B15-C		120			SMBJ20A
LD03/05-20B24-C		68			SMBJ30A

Note:
Output filtering capacitor C2 is electrolytic capacitor, it is recommended to apply electrolytic capacitor with high frequency and low resistance. For capacitance and current of capacitor please refer to manufacture's datasheet. Capacitor voltage reduced to at least 80%. C1 is ceramic capacitor, which is used to filter high-frequency noise. TVS is a recommended component to protect post-circuits if converter fails.

2. EMC solution-recommended circuit

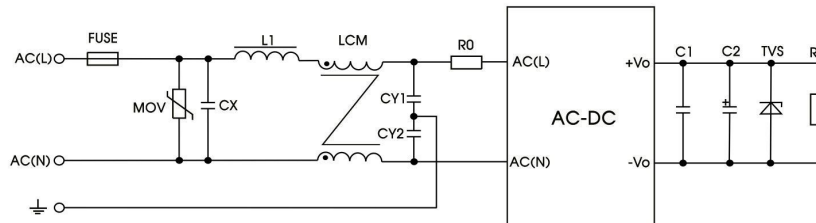



Fig 2: EMC application circuit with higher requirements

Element model	Recommended value
MOV	S14K350
CX	0.1μF/275VAC
L1	330uH/2.0A
LCM	10mH - 30mH, recommended to use MORNSUN's FL2D-Z5-103
CY1	1nF/400VAC
CY2	1nF/400VAC
FUSE	2A/250V, slow fusing, necessary
R0	33 Ω /3W

3. For more information please find the application note on www.mornsun-power.com

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION

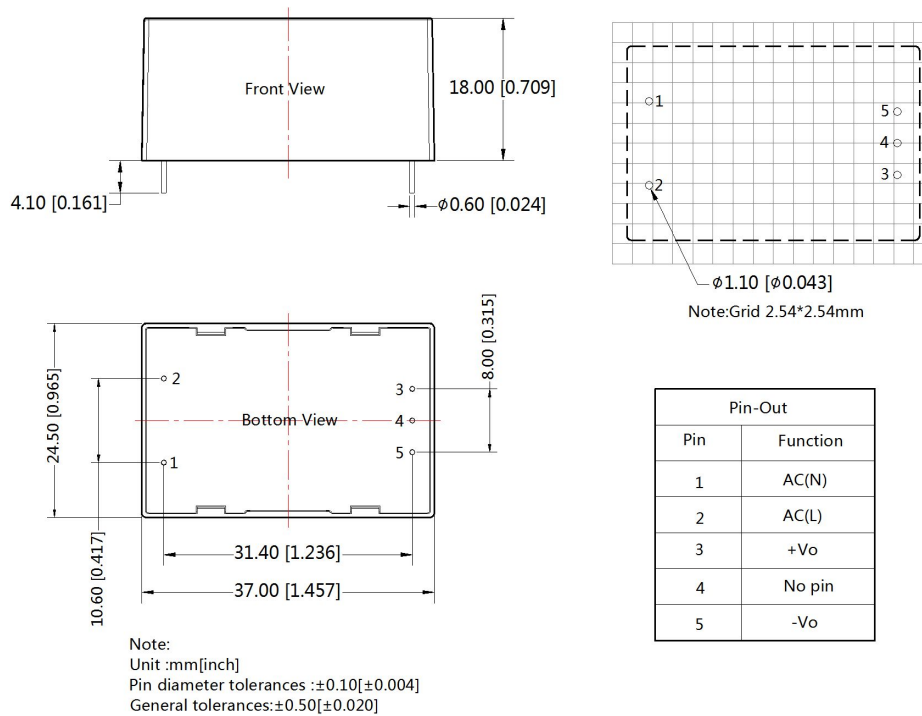

Note:

1. Packing information please refer to Product Packing Information which can be downloaded from www.mornsun-power.com. Packing bag number: 58200055;
2. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^{\circ}\text{C}$, humidity<75% with nominal input voltage and rated output load;
3. All index testing methods in this datasheet are based on our Company's corporate standards;
4. We can provide product customization service, please contact our technicians directly for specific information;
5. Products are related to laws and regulations: see "Features" and "EMC";
6. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail:sales@mornsun.cn www.mornsun-power.com