
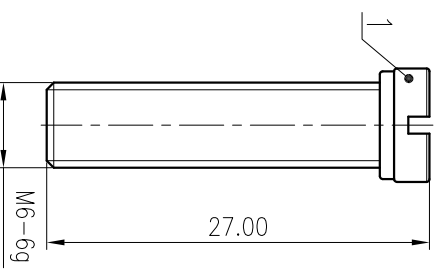

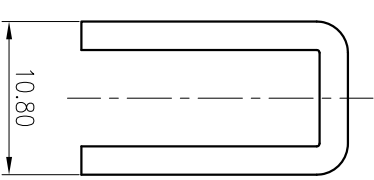
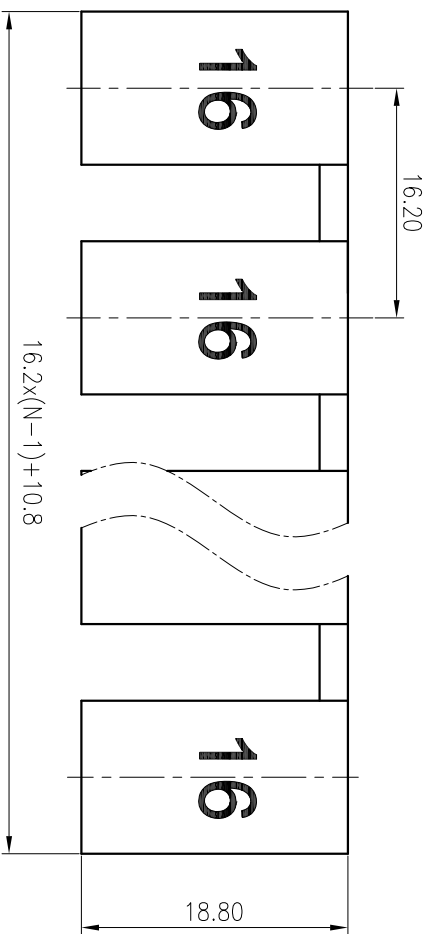


0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
3	~	~	~	~	~	~	~	~	~	~	~	~	1/10
6	10	18	30	50	80	120	180	250	315	400	500	>500	±2'
$\pm 0.12$ $\pm 0.18$ $\pm 0.22$ $\pm 0.26$ $\pm 0.31$ $\pm 0.37$ $\pm 0.57$ $\pm 0.80$ $\pm 0.93$ $\pm 1.05$ $\pm 1.15$ $\pm 1.60$ $\pm 2.20$ $\pm 2.50$													

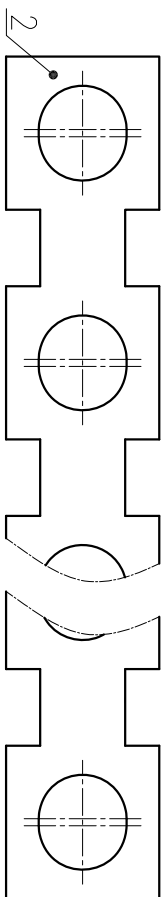

2	Current carrier	Copper	Sn Plated
1	Screws	Copper alloy	Ni Plated
ITEM	PART NAME	MATERIAL	NOTES
	螺丝扭矩/Torque Tightening(N. m/Lb.in)	M6.2.5/22.15	
	可距/Pitch(mm)/线数范围/Poles	16.2/N=02P~10P	
	使用温度范围/Operating temperature(°C)	-40~+105	
载流体与螺丝分并包装于同一盒中/Current carrier and Screws should be packed individually, which must be put in the same box			
符合RoHS环保要求/Conform to RoHS			
SURFACE: /			

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: LI GL 2020.06.04

CHKD: Moo J 2020.06.04

DRT: Chen K 2020.06.04

NAME: **DEGSON** 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

**FBIXX-16**

DRAWING NO.: FBIXX-16-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE
-----	-----	-------------	-----	------

D  
C  
B  
A

D  
C  
B  
A