

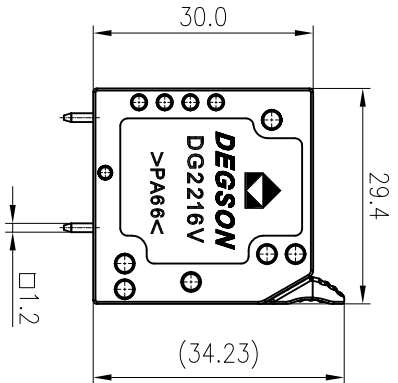
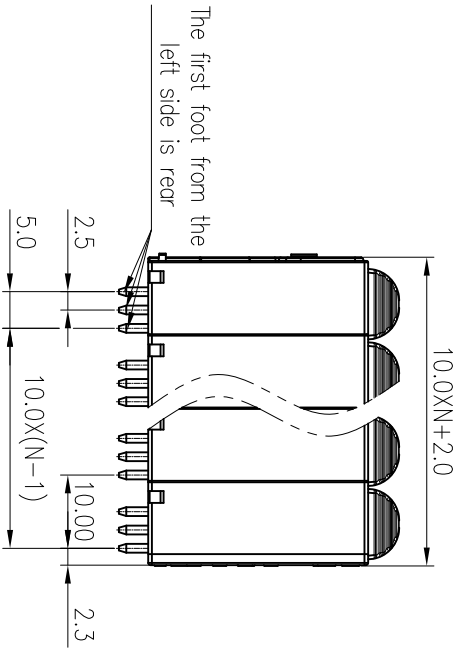
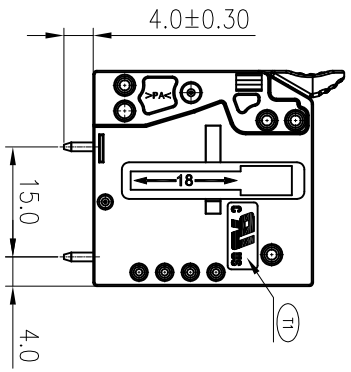
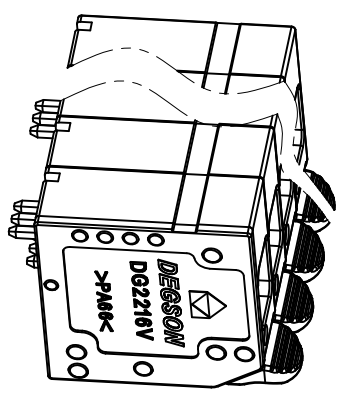


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>10
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
~	~	~	~
±0.31	±0.37	±0.57	±0.80
~	~	~	~
±1.05	±1.15	±1.60	±2.20
~	~	~	~
±2.50	±2.50	±2.50	±2.50
~	~	~	~
0.1/10	0.1/10	0.1/10	0.1/10
±2	±2	±2	±2



PCB LAYOUT

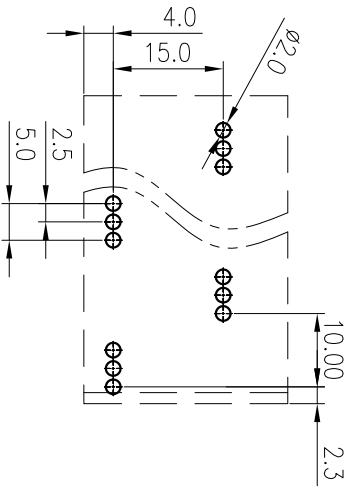

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/66	600/66	66
EC 标准/EC Standard:	/		
过压类别/Overvoltage Category/污秽等级/ Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	1000/76	1000/76	1000/76
额定脉冲电压/电压/Rated Impulse Voltage(KV)	8	8	8
额定脉冲电压/电压/Rated Impulse Voltage(KV)	8	8	8
线径范围/硬线和软线/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~16(25mm ² so)/18~4		
间距/Pitch(mm)/线数范围/Poles	10.0/N=02~12P		
剥线长度/Stripping length(mm)	18~20		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE:

MATERIAL:

MAT NO.:

STATUS:

APPD:lon CHH 2021.05.10

CHKD:Yu JZh 2021.05.10

DRAFT: ChenZh 2019.12.05

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG2216V-10.0-DB-XXP-1Y-00A(H)

DRAWING NO.: 10001064

TYPE: CUSTOMER DRAWING

SIZE: A4

SCALE: 1:1

SHEET

1/1

REV T1

DRFT

DATE

DESCRIPTION

ECN

REV