
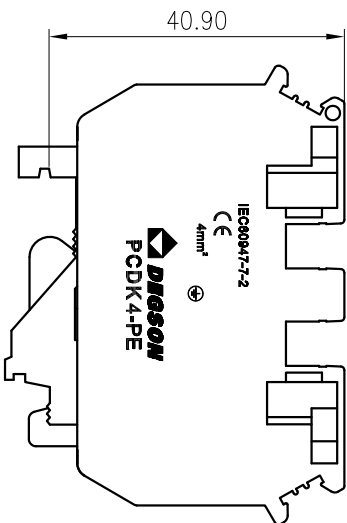

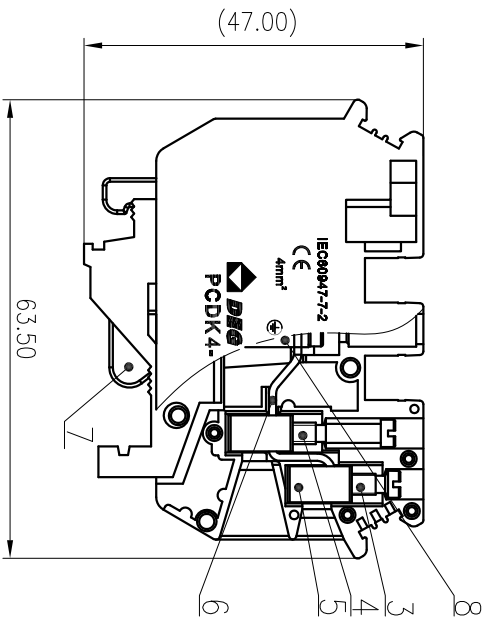


公差表/General Tolerances(mm)		0.1/10
0	>3	~
~	>6	~
~	>10	~
~	>18	~
3	6	~
~	10	~
~	18	~
~	30	~
~	50	~
~	80	~
~	120	~
~	180	~
~	250	~
~	315	~
~	400	~
~	500	~
~	>500	~
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.67	±0.80
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50
±2		

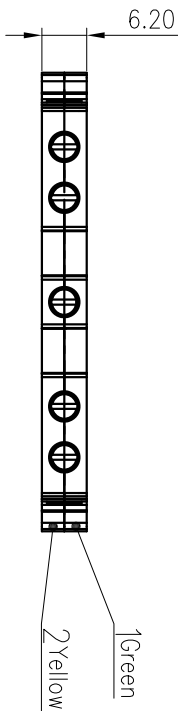

ITEM	NAME OF PART	MATERIAL	NOTES
8	Copper sets	Copper alloy	Ni Plated
7	Assembly	/	/
6	Current carrier	Copper	Sn Plated
5	Cage	Copper alloy	M3/Ni Plated
4	Screw 2	Copper alloy	M3/Ni Plated
3	Screw 1	Copper alloy	M3/Ni Plated
2	Housing	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
IEC 标准/IEC Standard:		/	/	/
过压类别/Overvoltage Category/污秽等级/Pollution Degree		III/3	/	/
额定电压/电流/Rated Voltage(V)/Current(A)		/	/	/
额定冲击电压(KV)/Rate Impulse Voltage(KV)		6.0	/	/
拧紧扭矩/Torque Tightening(N·m/Lb·in)		M3: 0.5/4.43	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~4.0/24~10	/	/
间距/Pitch(mm)		6.20	/	/
剥线长度/Stripping length(mm)		7-8	/	/
使用温度范围/Operating temperature(°C)		-40~+105	/	/
符合RoHS环保要求/Conform to RoHS		Yes	/	/

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
DEGSON 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

NAME: PCDK4-PE-01P-1Y-00A(H)

APPD: LIGL 2020.04.11
 CHKD: MDEK 2020.04.11
 DRFT: YanH 2020.04.11
 DRAWING NO.: PCDK4-PE-C01

TYPE: CUSTOMER DRAWING SCALE: 1:1 SHEET 1/1

REV	EON	DESCRIPTION	DRFT	DATE
1				
2				
3				
4				

SIZE: A4
 mm
 inch

REV TO