
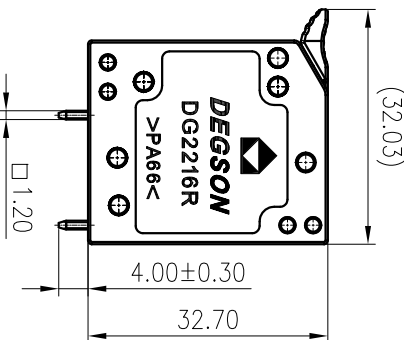
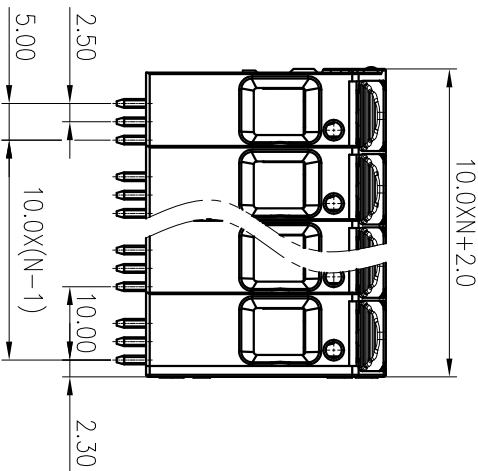


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>18	>50
~	~	~	~
3	~	~	~
6	~	~	~
10	~	~	~
18	~	~	~
30	~	~	~
50	~	~	~
80	~	~	~
120	~	~	~
180	~	~	~
250	~	~	~
315	~	~	~
400	~	~	~
500	~	~	~
>500	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±2.50	±2.50	±2.50
0.1/10	0.1/10	0.1/10	0.1/10
±2	±2	±2	±2

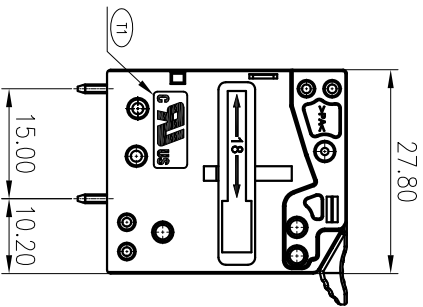

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	600/66	600/66	/
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/Rated Voltage(V)/Current(A)	1000/76	1000/76	1000/76
额定脉冲电压/Rate Impulse Voltage(KV)	8	8	8
N=02~12P:			
UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	300/66	150/66	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/Rated Voltage(V)/Current(A)	400/76	400/76	630/76
额定脉冲电压/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~16(25mm²sol)/18~4		
剥线长度/Stripping length(mm)	18~20		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /

MAT NO: /

STATUS: /

APPD: Lon ChH 2021.05.10

CHKD: Yu ZH 2021.05.10

DRAFT: ChenZh 2021.01.25

NAME: DG2216R-10.0-XXP-1Y-00A(H)

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司

DRAWING NO.: 10004317

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV	ECN	DESCRIPTION	DRAFT	DATE	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 1:1	SHEET
①	20210086	1xAdd the UL lettering	Chen Zh	2021.05.10	mm inch			1/1