
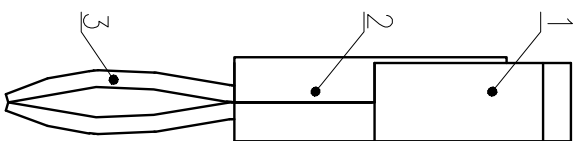
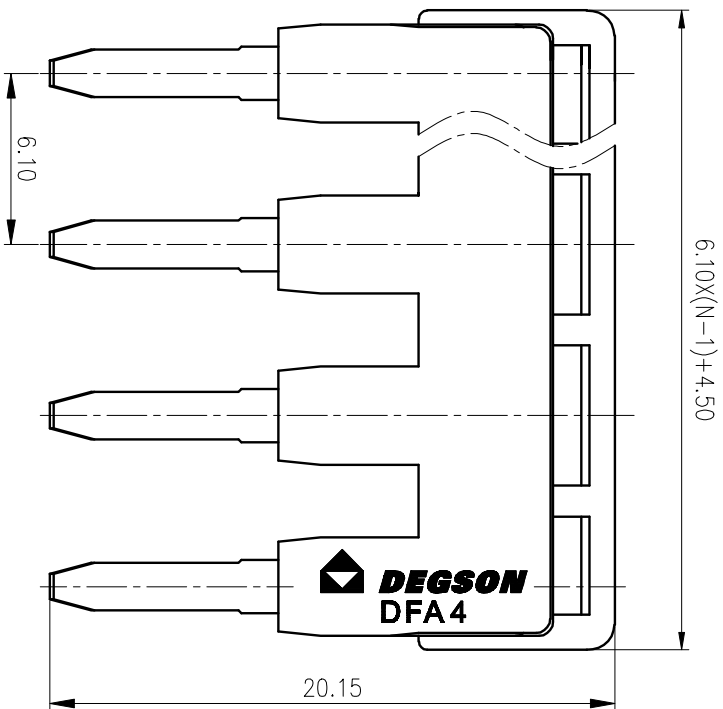


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50



3	Bridgework	Copper	Sn Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
间距/Pitch (mm) / 线距/Lead (mm)		6.10 / N=02~10P	
使用温度范围 / Operating Temperature (°C)		-40~+105	
符合RoHS环保要求 / Conform to RoHS		Yes	

MATERIAL: /
 SURFACE: /
 MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.04
 CHKD: Moo J 2020.06.04
 DRT:ZhengQG 2020.06.04
 NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO.,LTD**
宁波高松电子有限公司
 DRAWING NO.: DFA4-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 4:1
 SHEET 1/1

REV	ECN	DESCRIPTION	DRT	DATE