

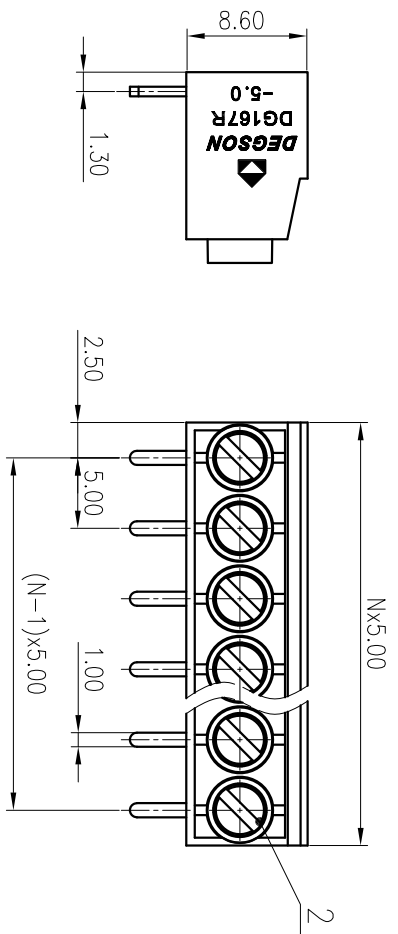


| 公差带 (General Tolerances)(mm) | | 0 | >3 | >6 | >10 | >18 | >30 | >50 | >80 | >120 | >180 | >250 | >315 | >400 | >500 | 0.1/1/10 |
|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|----------|
| ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ~ | ±Z |
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 | ±2.50 | ±Z | ±Z |

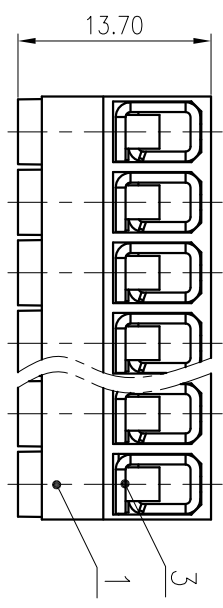

| | | | |
|---|---------|--------------|----------------|
| 3 | Pin | Copper alloy | Sn plated |
| 2 | Screw | Steel | M2.5/Zn plated |
| 1 | Housing | PA66 | UL94V-0 |


| | | | |
|--|----------------|---|--------|
| UL 标准/UL Standard: | B | C | D |
| 额定电压/电压/Rated Voltage(V)/Current(A) | 300/15 | / | 300/10 |
| EC 标准/IEC Standard: | | | |
| 过压类别/Overvoltage Category/污染等级/ Pollution Degree | III/2 | | |
| 额定电压/电流/Rated Voltage(V)/Current(A) | 250/22 | | |
| 工频耐压/Withstanding voltage(V/1Min) | AC2000 | | |
| 绕线扭矩/Torque Tightening(N·m/Lb.in) | M2.5: 0.4/3.54 | | |
| 线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG) | 0.5~2.5/22~12 | | |
| 间距/Pitch(mm)/线数范围/Poles | 5.0/N=02~12P | | |
| 剥线长度/Stripping length(mm) | 6~7 | | |
| 使用温度范围/Operating Temperature(°C) | -40~+105 | | |
| 符合RoHS环保要求/Conform to RoHS | Yes | | |

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: LanChH 2020.05.26
 CHKD: YUJZ 2020.05.26
 DRAFT: ChenZh 2020.05.26

NAME: **DEGSON** 宁波高松电子有限公司
 NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: 10002118
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET: 1/1

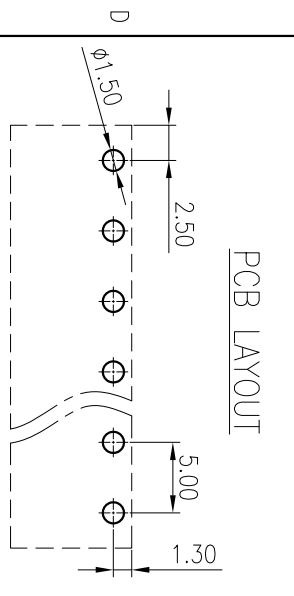

| REV | ECN | DESCRIPTION | DRAFT | DATE |
|-----|-----|-------------|-------|------|
| 1 | | | | |