




Jinchang Electron GlobalService

# Car Radio Antenna DAB&DVB Splitter

## JCD714



### DIMENSIONS

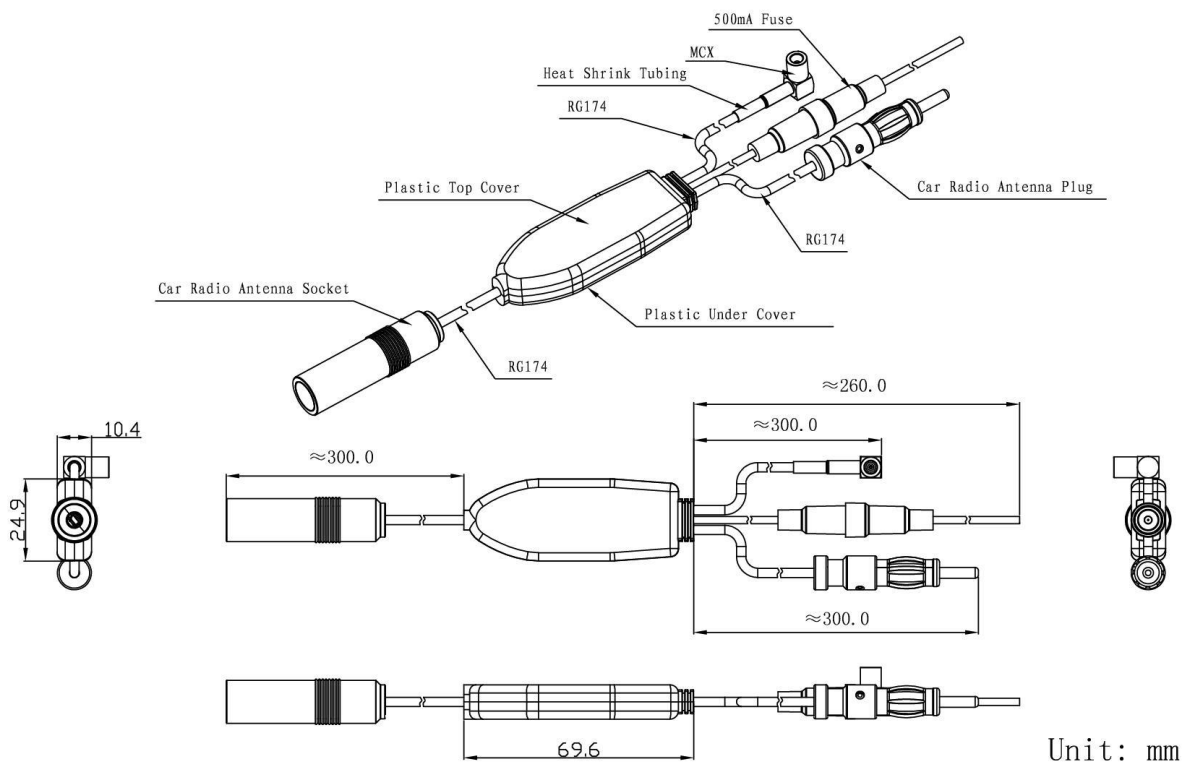

Zhejiang JC Antenna Co., Ltd.  
Address: 398#, Zhenye Road, South Street, Jiaxing, Zhejiang, China  
www.jinchanggps.com

Contact: Dora Soong  
Email&Skype: sale2@jinchanggps.com  
Mobile: +86 18405863271

**SPECIFICATIONS**

Item	Specifications	
Amplifier	Frequency Range	525~1605KHz/88~108MHz/174~237MHz
	Wave Band	AM/FM/DAB BIII
	Impedance	50 Ω
	Gain	AM/FM:10±2dB DAB:20±2dB
	V.S.W.R	<2.0
	Noise Figure	<3.0
	Supply Voltage	9~24V DC
	Current Consumption	26~28mA
Mechanical	Cable	RG174
	Fuse	500mA
	PCB	FR4
	Connector	Car Antenna Plug&Socket MCX or others
	Plastic Housing	ABS
Environmental	Operating Temperature	-40°C~+85°C
	Relative Humidity	Up to 75%
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours
	Environmentally Friendly	ROHS Compliant

**Installation Schematic**

