

## FLORENCE-1R-MAXI-WG

Asymmetric oval beam for wall grazing

### TECHNICAL SPECIFICATIONS:

Dimensions	21.7 x 286.0 mm
Height	11 mm
Fastening	pin
ROHS compliant	yes ⓘ


### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
FLORENCE-1R-MAXI-WG	Linear lens	PMMA	clear	

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
F14487_FLORENCE-1R-MAXI-WG » Box size: 398 x 298 x 265 mm	120	60	12	6.8



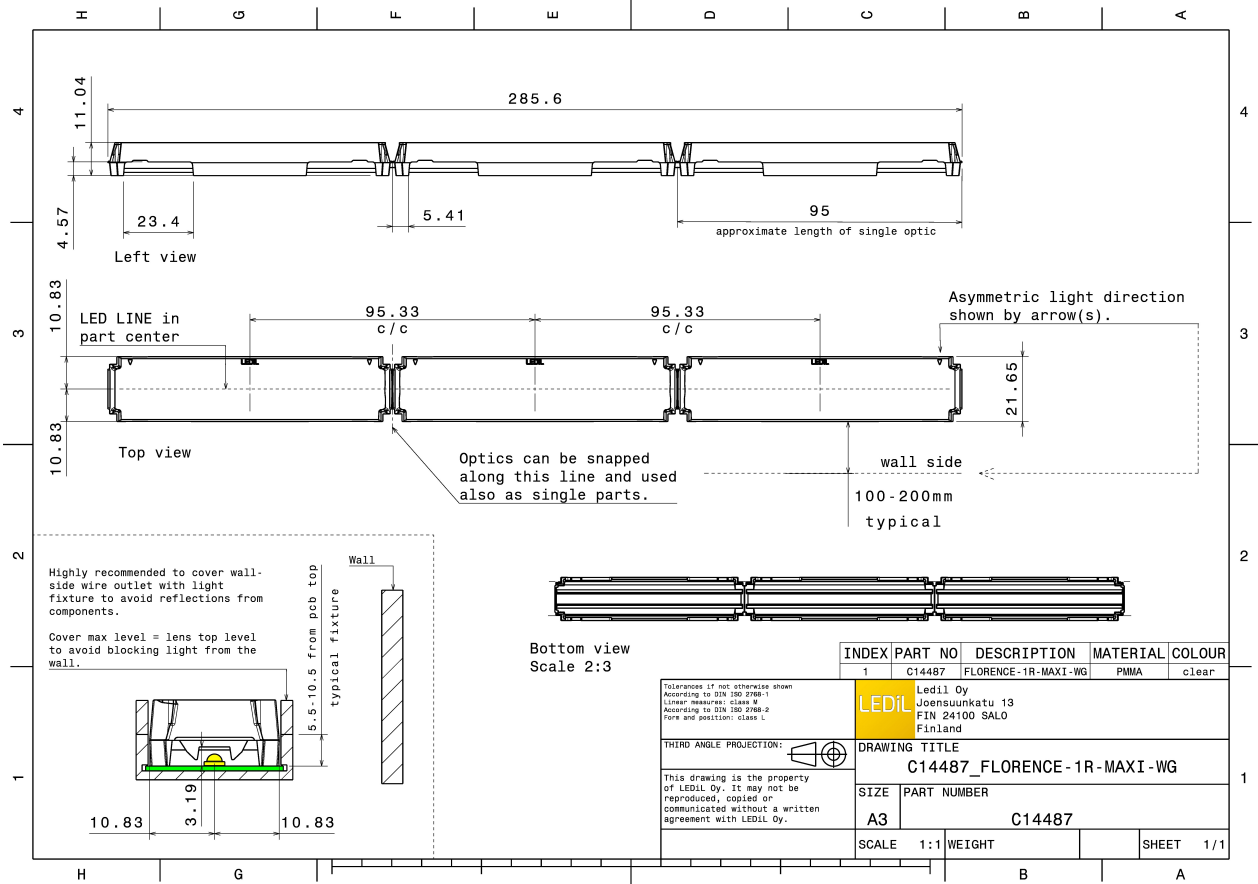


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)


#### PHOTOMETRIC DATA (MEASURED):




LED CALGD0414-M8W1  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

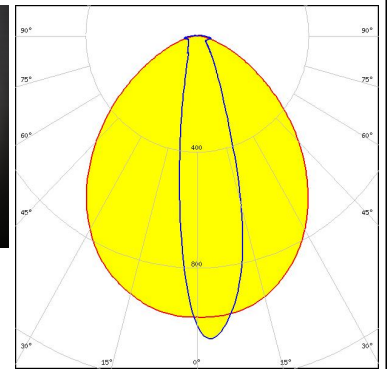


LED CALGD0814-M17W1  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

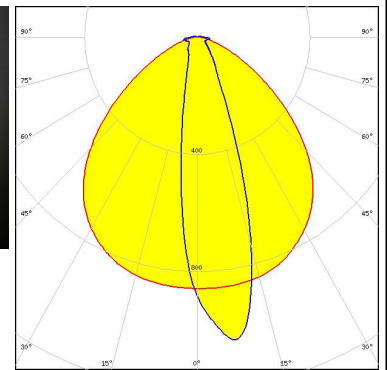

LED L0-280024-xxx-C0800-L267  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 0.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

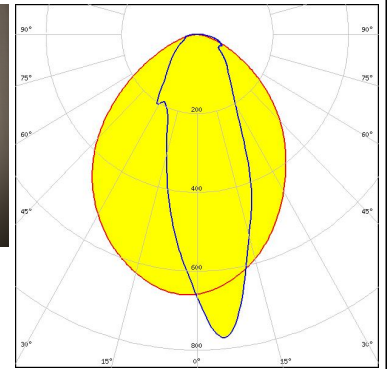


LED XP-E  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 1.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

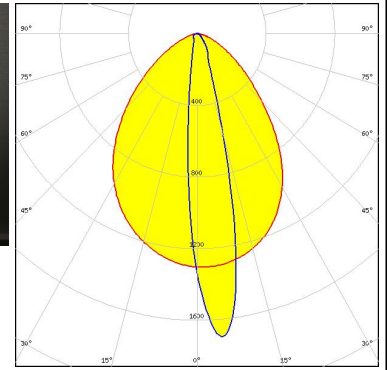

#### PHOTOMETRIC DATA (MEASURED):


##### CREE LED

LED XP-E2  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

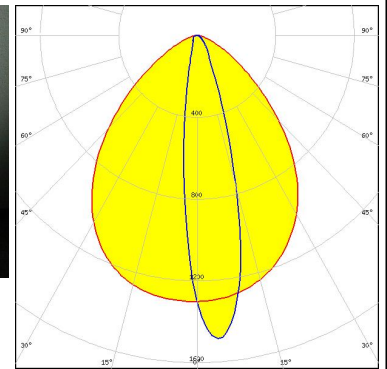


##### CREE LED

LED XP-G  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

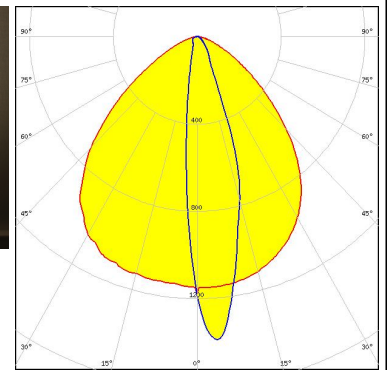


##### CREE LED

LED XP-G2  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

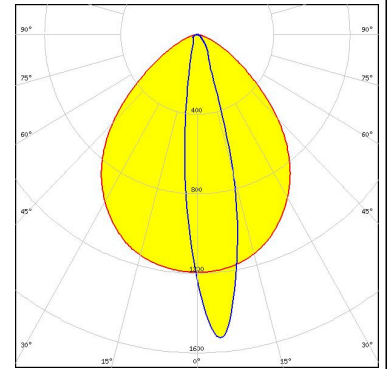

##### CREE LED

LED XQ-E HD  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


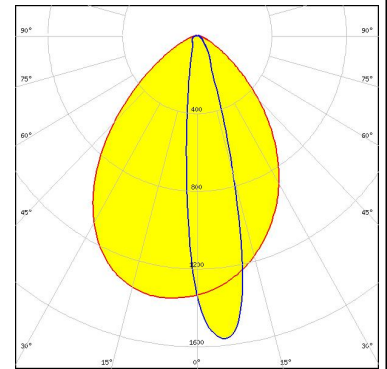




#### PHOTOMETRIC DATA (MEASURED):


##### LUMILEDS

LED LUXEON 3014  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

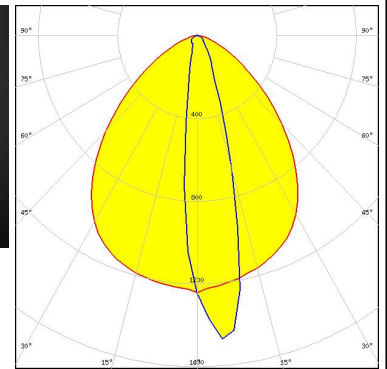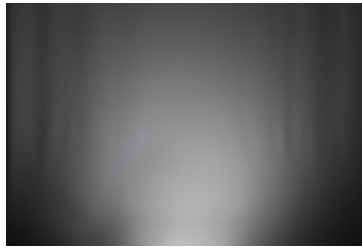


##### LUMILEDS

LED LUXEON 3030 2D (Round LES)  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

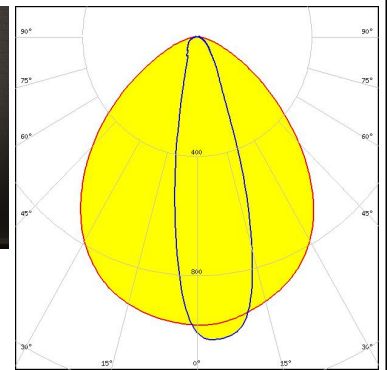


##### LUMILEDS

LED LUXEON A  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

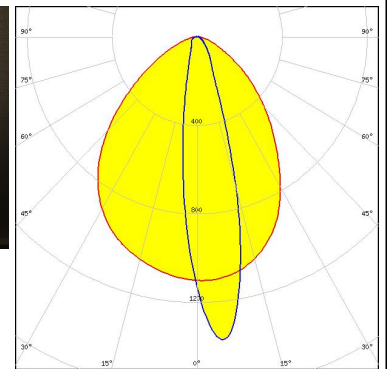

##### LUMILEDS


LED LUXEON Rebel  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 1.4 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

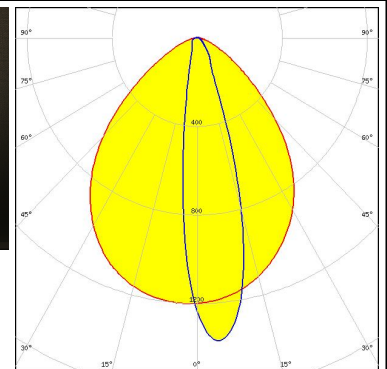

#### PHOTOMETRIC DATA (MEASURED):


#### LUMILEDS

LED LUXEON Rebel ES  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

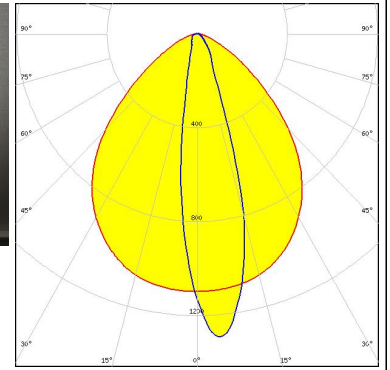



#### LUMILEDS

LED LUXEON Z ES  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

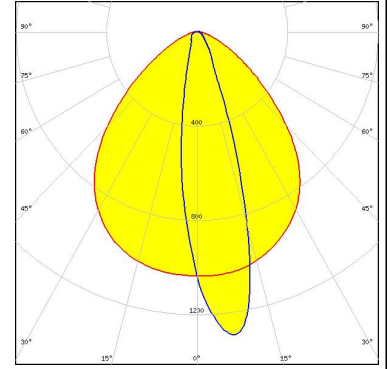


#### NICHIA

LED NCSxE17A  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C14353\_FLORENCE-1R-CLIP-A

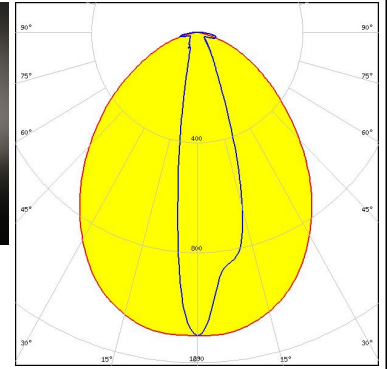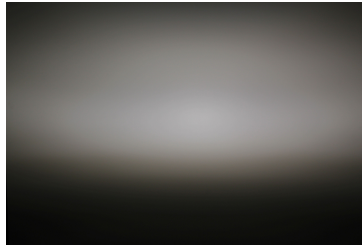

#### NICHIA


LED NCSxx19B  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

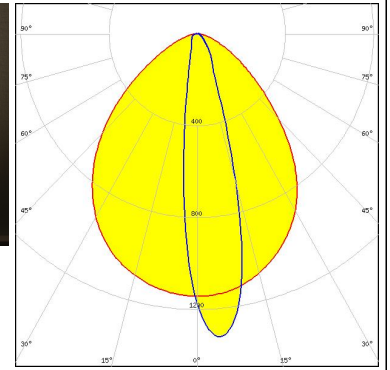


#### PHOTOMETRIC DATA (MEASURED):




LED NF2x757G  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

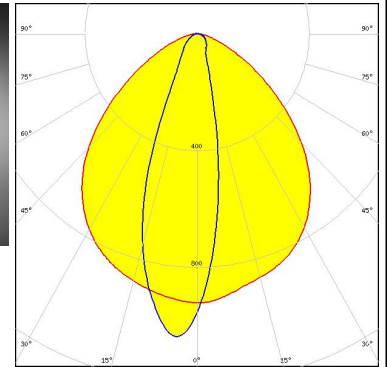


LED NFSW757H  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C14353\_FLORENCE-1R-CLIP-A

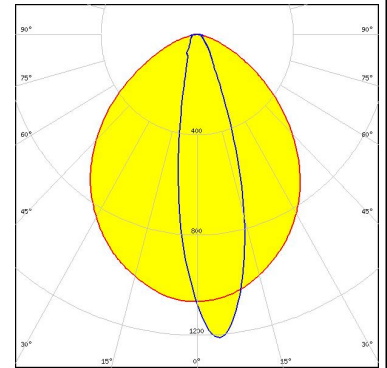

LED NVSxx19B/NVSxx19C  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

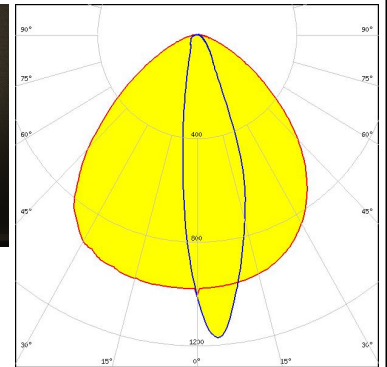

LED Duris S5 (2 chip)  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

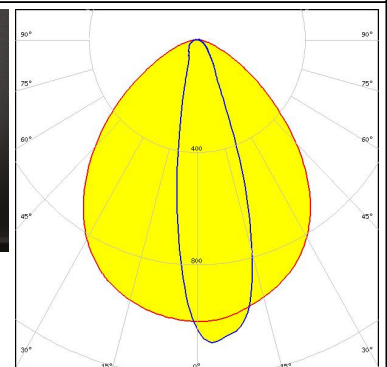


#### PHOTOMETRIC DATA (MEASURED):

#### OSRAM



Opto Semiconductors

LED OSLON SSL 80  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

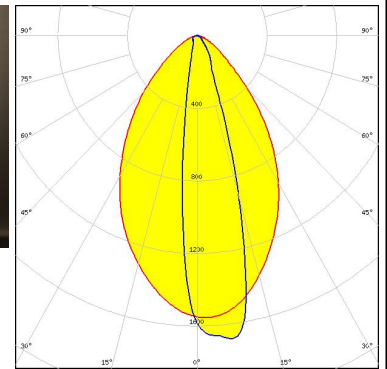



#### SAMSUNG

LED LM28xB Series  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

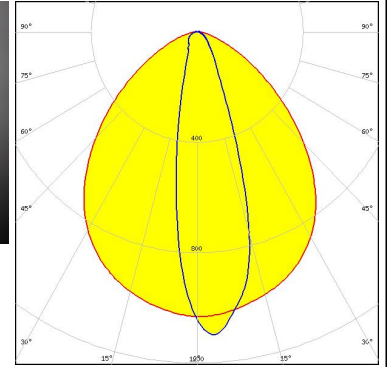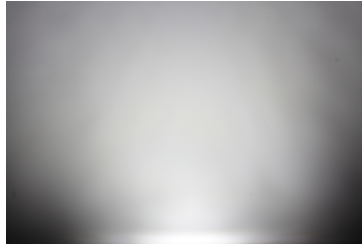



#### SAMSUNG

LED LM301A  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

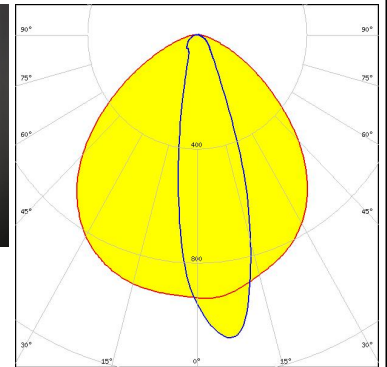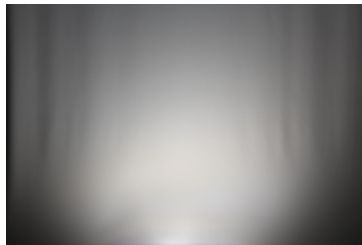

#### SAMSUNG

LED LM561C  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

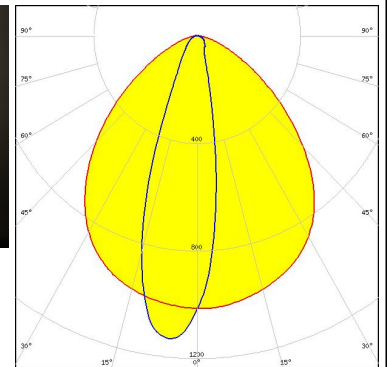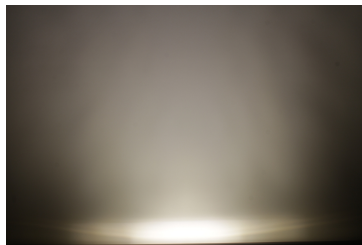




#### PHOTOMETRIC DATA (MEASURED):


#### SAMSUNG

LED LT-S282N  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

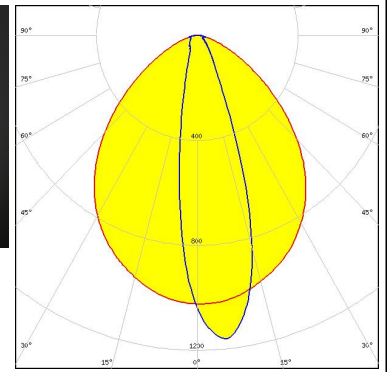

SEOUL SEMICONDUCTOR


LED SEOUL DC 3030  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C14353\_FLORENCE-1R-CLIP-A

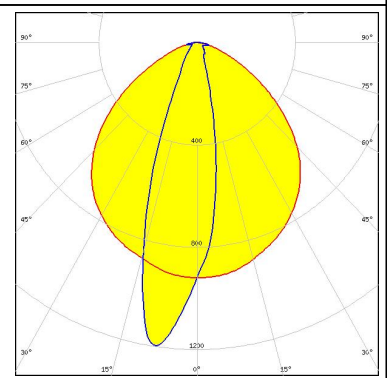


#### PHOTOMETRIC DATA (SIMULATED):




LED XB-H  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

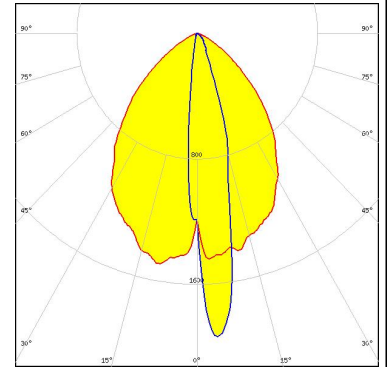


LED XQ-E HI  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 Peak intensity 2.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

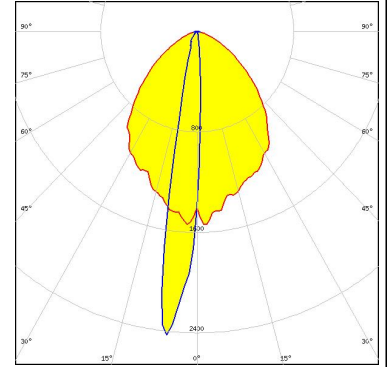

LED LUXEON 2835 Line  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.8 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

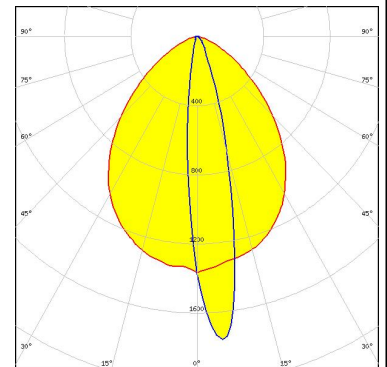

LED LUXEON R  
 FWHM / FWTM Asymmetric  
 Efficiency 88 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

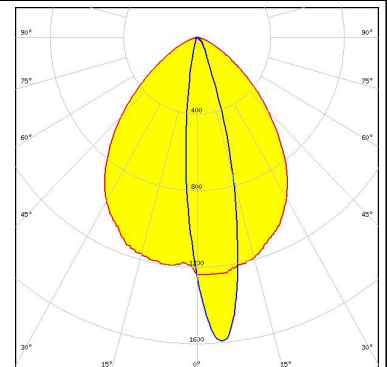




#### PHOTOMETRIC DATA (SIMULATED):


##### LUMILEDS

LED LUXEON T  
 FWHM / FWTM Asymmetric  
 Efficiency 90 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

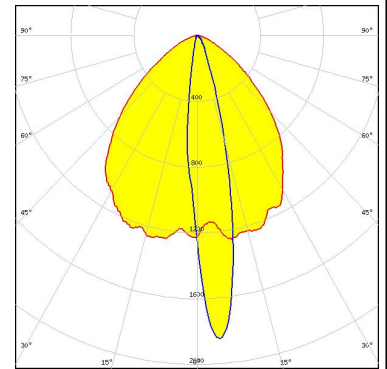


##### LUMILEDS

LED LUXEON TX  
 FWHM / FWTM Asymmetric  
 Efficiency 91 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

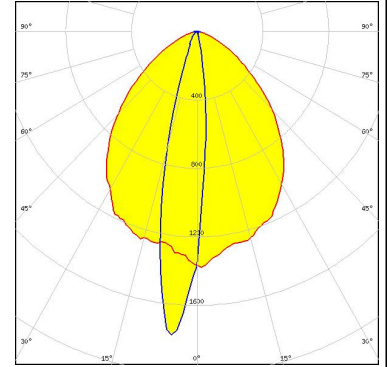


##### NICHIA

LED NF2x757A  
 FWHM / FWTM Asymmetric  
 Efficiency 89 %  
 LEDs/each optic 1  
 Light colour White  
 Required components:

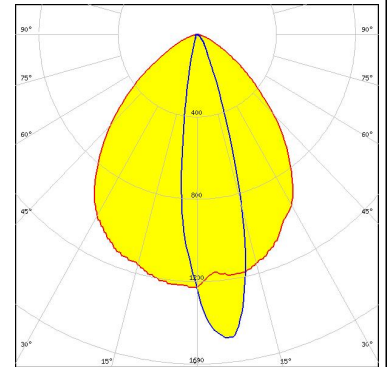

##### OSRAM

Opto Semiconductors  
 LED Duris E 2835  
 FWHM / FWTM Asymmetric  
 Efficiency 94 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

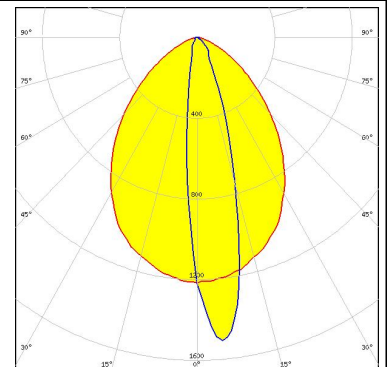


#### PHOTOMETRIC DATA (SIMULATED):

##### OSRAM

Opto Semiconductors


LED OSCONIQ C 2424  
 FWHM / FWTM Asymmetric  
 Efficiency 95 %  
 Peak intensity 1.9 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

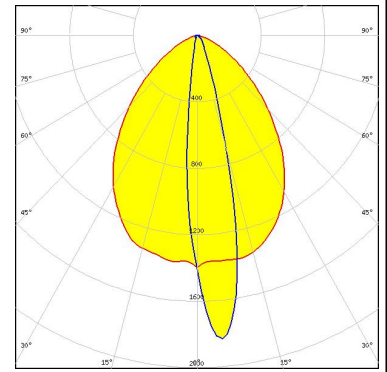

##### OSRAM

Opto Semiconductors


LED OSLON PURE 1010 (GW VJLPE1)  
 FWHM / FWTM Asymmetric  
 Efficiency 92 %  
 Peak intensity 1.5 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

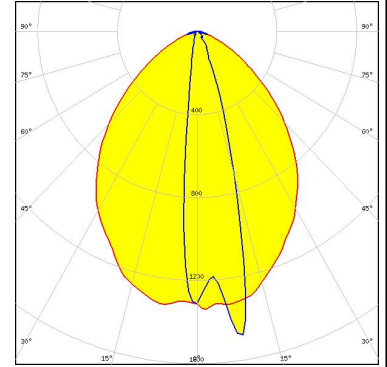

##### OSRAM


Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM / FWTM Asymmetric  
 Efficiency 89 %  
 Peak intensity 1.7 cd/lm  
 LEDs/each optic 1  
 Light colour Red  
 Required components:

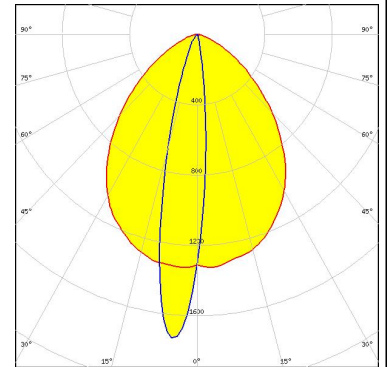

SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C  
 FWHM / FWTM Asymmetric  
 Efficiency 93 %  
 Peak intensity 1.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

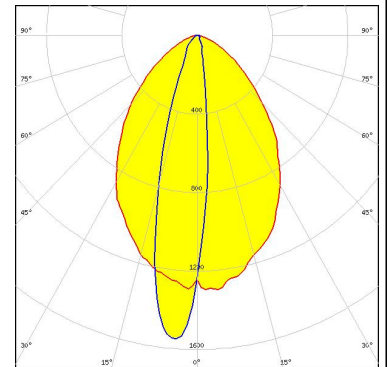

#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)