
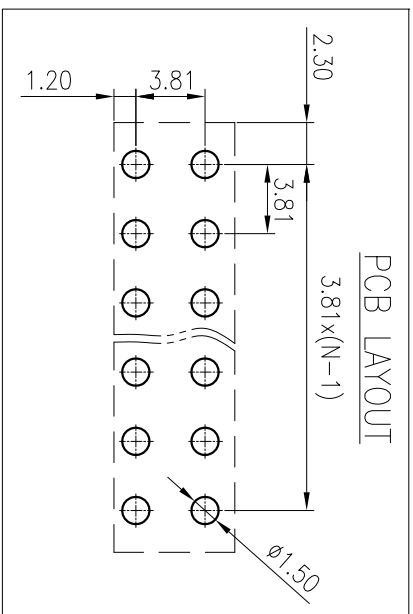
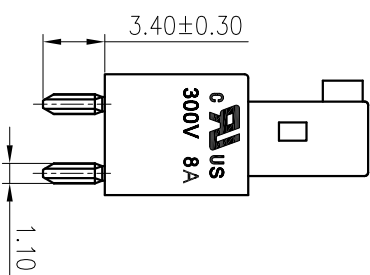
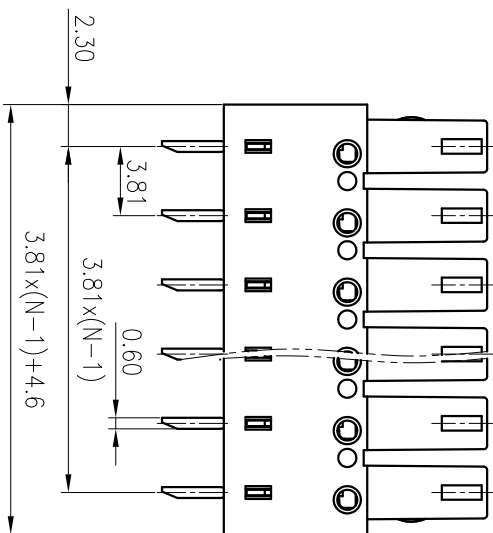
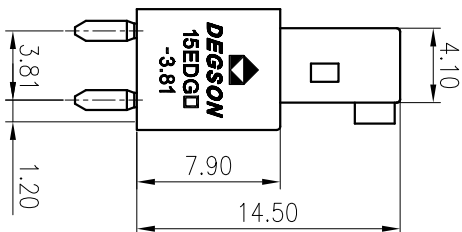


未注公差/General tolerances(mm)		公差/Dimensional Tolerances
0	>3	±0.1/±0.10
~	>6	±0.15/±0.15
~	>10	±0.2/±0.20
~	>18	±0.25/±0.25
~	>30	±0.3/±0.30
~	>50	±0.4/±0.40
~	>80	±0.5/±0.50
~	>120	±0.6/±0.60
~	>180	±0.7/±0.70
~	>250	±0.8/±0.80
~	>315	±1.0/±1.00
~	>400	±1.2/±1.20
~	>500	±1.5/±1.50
±0.12	+0.18/+0.22	±0.26
	+0.31/+0.37	+0.57
	+0.80/+0.93	+1.05
	+1.15/+1.60	+2.20
		±2.50



ITEM	NAME OF PART	MATERIAL	NOTES
2	Clamp	Copper alloy	Sn Plated
1	Housing	PAG6	UL94V-0

UL 标准/UL Standard:	B	C	D
IEC 标准/IEC Standard:	300/8	/	/
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电涌/Rated Voltage(V)/Current(A)	160/7	250/7	320/7
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	2.5	2.5	2.5
可距/Pitch(mm)/线数范围/Poles	3.81	N=02~24P	
使用温度范围/Operating temperature(C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL:	/	SURFACE: /
MAT NO.:	/	
STATUS:	/	
APPD:	Li GL 2020.06.17	NAME:
CHKD:	Mao J 2020.06.17	NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.:	15EDGB-3.81-C01	REV	T0
TYPE:	CUSTOMER DRAWING	SCALE:	2.5:1 SHEET 1/1

DRFT:ZhengQG	2020.06.17	SIZE:A4	SCALE:2.5:1 SHEET 1/1
--------------	------------	---------	-----------------------

REV	ECN	DESCRIPTION	DRFT	DATE